


STB SYSTEMS, INC. SPRINT

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1280 x1024
Data Bus Type	32-bit VESA Local Bus
Memory Type	DRAM
Maximum Onboard Memory	1MB

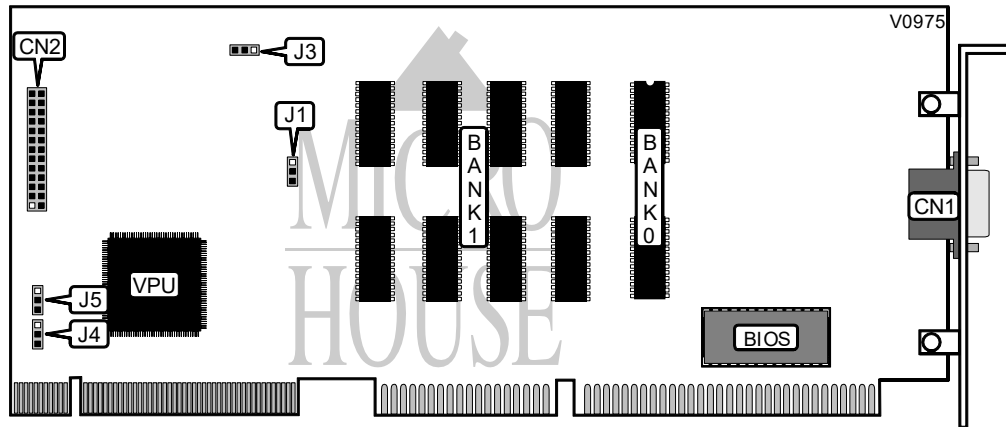

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	VGA feature connector	CN2

VERTICAL REFRESH RATE SELECTION	
Mode	J3
Standard	Pins 2 & 3 closed
ERGO	Pins 1 & 2 closed

BUS SPEED SELECTION		
Speed	J1	J5
33MHz	Pins 1 & 2 closed	Pins 2 & 3 closed
50MHz	Pins 2 & 3 closed	Pins 1 & 2 closed

INTERRUPT SELECTION	
IRQ 2	J4
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

Continued on next page. . .

STB SYSTEMS, INC.
SPRINT

...continued from previous page

DRAM CONFIGURATION		
Size	Bank 1	Bank 2
1MB	(2) 256K x 16	NONE
1MB	NONE	(8) 256K x 4

Note: Banks may not be populated simultaneously.