


ADVANCED GRAVIS COMPUTER TECHNOLOGY, LTD.  
 ULTRASOUND ACE V.1.0

**Card Type** Sound wavetable card  
**Chipset Controller** ICS 1614  
**I/O Options** Line in, line out  
**Maximum DRAM** 1MB

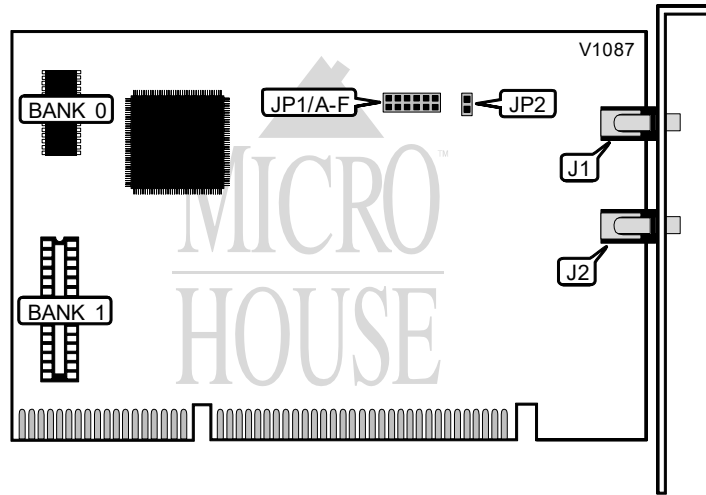

CONNECTIONS			
Purpose :	Location	Purpose :	Location
Line out	J1	Line in	J2

BASE I/O ADDRESS SELECTION						
Address	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F
260h	Open	Open	Open	Open	Open	Closed
210h	Closed	Open	Open	Open	Open	Open
220h	Open	Closed	Open	Open	Open	Open
230h	Open	Open	Closed	Open	Open	Open
240h	Open	Open	Open	Closed	Open	Open
250h	Open	Open	Open	Open	Closed	Open

ON-BOARD SOUND PROCESSOR CONFIGURATION	
Setting	JP2
Disabled	Closed
Enabled	Open

Note: The Ultrasound is designed for use with another sound card. If the Ultrasound is the only sound card in the system, enable the on-board processors.

Continued next page...

ADVANCED GRAVIS COMPUTER TECHNOLOGY, LTD.  
ULTRASOUND ACE V.1.0

... continued from previous page.

DRAM CONFIGURATION		
Size	Bank (	Bank :
512KB	(1) 512K x 8	NONE
1MB	(1) 512K x 8	(1) 512K x 8