


**MIRO COMPUTER PRODUCTS, INC.**  
**MIROCRYSTAL 8S/PCI**

**Category** Video  
**Video Types Supported** XVGA  
**Video Processor** S3  
**Highest Resolution Supported** 1280 x 1024  
**Data Bus Type** 32-bit PCI  
**Memory Type** DRAM  
**Maximum Onboard Memory** 2MB

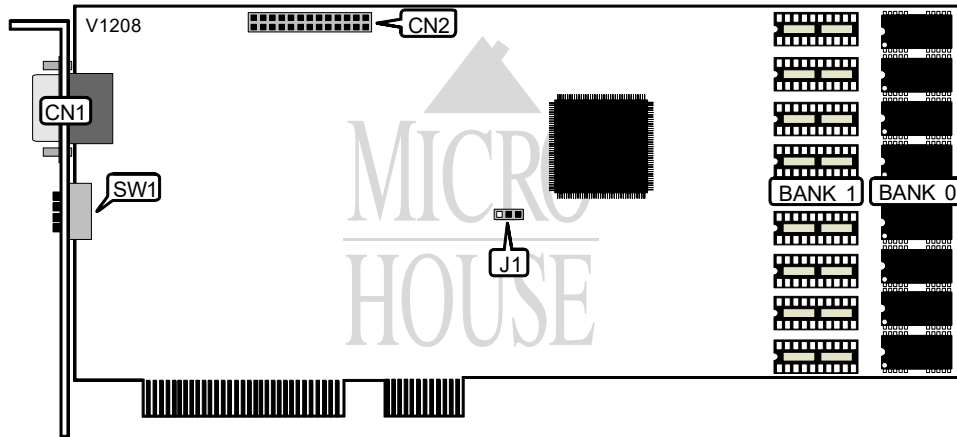

CONNECTIONS			
Position	Location	Position	Location
15-pin analog video port	CN1	VESA feature connector	CN2

MONITOR TYPE SELECTION				
Type	SW1/1	SW1/2	SW1/3	SW1/4
35KHz Multi-frequency	On	On	On	Off
48KHz Multi-frequency	Off	Off	On	Off
58KHz Multi-frequency	On	Off	Off	Off
64-85KHz Multi-frequency	Off	Off	Off	Off

PCI MOTHERBOARD CONFIGURATION	
Type	J1
Standard	Pins 1 & 2 closed
Classic/PCI i1486 Baby-AT	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(8) 256K x 4	NONE
2MB	(8) 256K x 4	(8) 256K x 4