


MIRO COMPUTER PRODUCTS, INC. MIROCRYSTAL 16SI/VL

Category Video
Video Types Supported XVGA
Video Processor S3
Highest Resolution Supported 1280 x 1024
Data Bus Type 32-bit VESA Local Bus
Memory Type DRAM
Maximum Onboard Memory 2MB

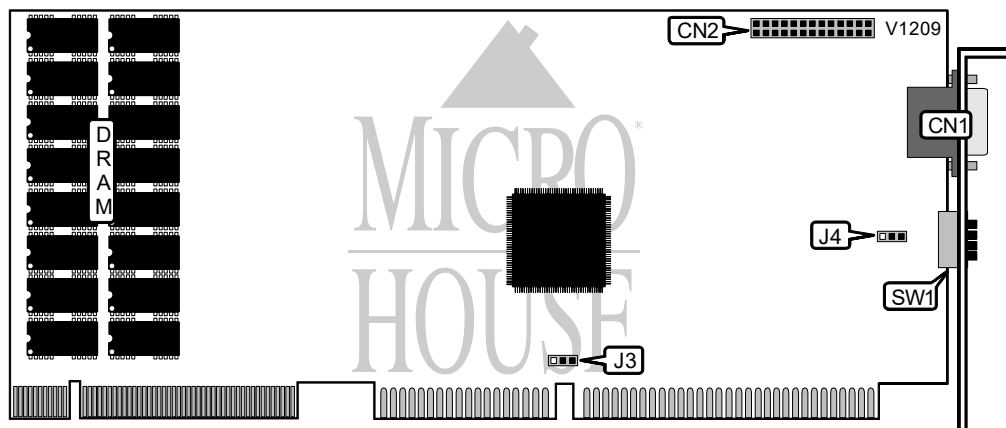

CONNECTIONS			
Position	Location	Position	Location
15-pin analog video port	CN1	VESA feature connector	CN2

MONITOR TYPE SELECTION				
Type	SW1/1	SW1/2	SW1/3	SW1/4
35-48KHz Multi-frequency	Off	On	On	Off
64KHz Multi-frequency	Off	On	Off	Off
78KHz Multi-frequency	Off	Off	On	Off
82-85KHz Multi-frequency	Off	Off	Off	Off

VESA CLOCK SPEED SELECTION	
Speed	J3
≤33MHz	Pins 2 & 3 closed
>33MHz	Pins 1 & 2 closed

16SI/VL SCREEN CONFIGURATION	
Setting	J4
Single-screen	Pins 2 & 3 closed
Dual-screen/multiscreen	Pins 1 & 2 closed