
MIRO COMPUTER PRODUCTS, INC. MIROCRYSTAL 16SI/PCI

Category	Video
Video Types Supported	XVGA
Video Processor	S3
Highest Resolution	1280 x 1024
Supported	
Data Bus Type	32-bit PCI
Memory Type	DRAM
Maximum Onboard Memory	2MB

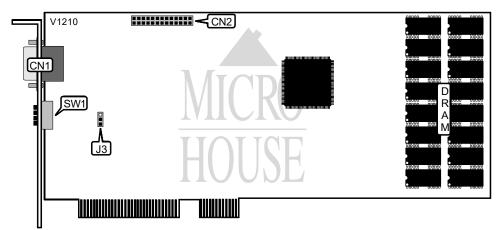

CONNECTIONS					
Pi pose	Lc ation	Pt pose	Lc ⇒ation		
15-pin analog video port	CN1	VESA feature connector	CN2		

MONITOR TYPE SELECTION					
Туן э	SW1/1	SW1/2	SW1/3	SW1/4	
35KHz Multi-frequency	On	On	On	Off	
48KHz Multi-frequency	Off	Off	On	Off	
58KHz Multi-frequency	On	Off	Off	Off	
64-85KHz Multi-frequency	Off	Off	Off	Off	

16SI/PCI SCREEN CONFIGURATION			
Setting	J3		
í Single-screen	Pins 2 & 3 closed		
Dual-screen/multiscreen	Pins 1 & 2 closed		