
MIRO COMPUTER PRODUCTS, INC. MIROCRYSTAL 10SD/PCI

Category	Video
Video Types Supported	XVGA
Video Processor	S3
Highest Resolution	1280 x 1024
Supported	
Data Bus Type	32-bit PCI
Memory Type	DRAM
Maximum Onboard Memory	2MB

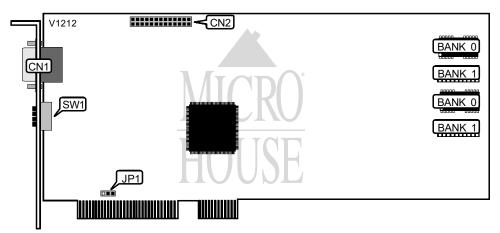

CONNECTIONS			
Pi pose	Lc ation	Pι pose	Lc ⇒ation
15-pin analog video port	CN1	VESA feature connector	CN2

MONITOR TYPE SELECTION				
Туן э	SW1/1	SW1/2	SW1/3	SW1/4
35KHz Multi-frequency	On	On	On	Off
48KHz Multi-frequency	Off	Off	On	Off
58KHz Multi-frequency	On	Off	Off	Off
64-85KHz Multi-frequency	Off	Off	Off	Off

FACTORY CONFIGURED - DO NOT ALTER		
Jumper	Position	
JP1	Pins 2 & 3 closed	

DRAM CONFIGURATION			
Siz →	Bank 0	Bank 1	
1MB	(2) 1024K x 4	NONE	
2MB	(2) 1024K x 4	(2) 1024K x 4	