
RELIALOGIC CORPORATION PRIVATE, LTD. VLP940 JATON CORPORATION

JAX 8246 (VL-46) Category Video Types Supported Video Processor Highest Resolution Supported Data Bus Type Memory Type Maximum Onboard Memory

Video XVGA Trident 9440AGI 1280 x 1024 32-bit VESA Local Bus DRAM 2MB

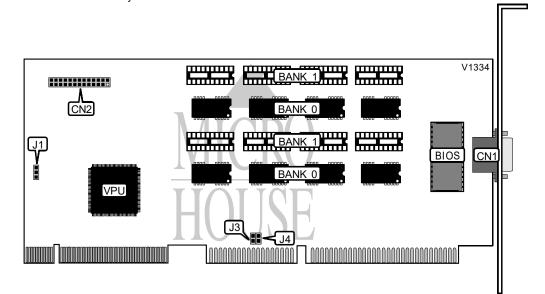

| CONNECTIONS | | | | |
|--------------------------|----------|-----------------------|----------|--|
| Purpos 3 | Location | Purpos 3 | Location | |
| 15-pin analog video port | CN1 | VGA feature connector | CN2 | |

| VL-BUS TIMING SELECTION | | | |
|----------------------------------------------------|-------------------|--|--|
| Timing | J1 | | |
| Alternate | Pins 1 & 2 closed | | |
| Standard | Pins 2 & 3 closed | | |
| Note: The exact location of Pin 1 is unidentified. | | | |

| VL-BUS CPU SPEED SELECTION | | | | |
|----------------------------|--------|--|--|--|
| Speed | J3 | | | |
| ≤33MHz | Open | | | |
| >33MHz | Closed | | | |

Continued on next page . . .

RELIALOGIC CORPORATION PRIVATE, LTD. VLP940 JATON CORPORATION JAX 8246 (VL-46)

...continued from previous page

| MONITOR SCAN RATE SELECTION | | | | |
|-----------------------------|--------|--|--|--|
| Rate | J4 | | | |
| í <48.7KHz | Closed | | | |
| 48.7KHz | Open | | | |

| DRAM CONFIGURATION | | | | |
|--------------------|--------------|-------------------|--|--|
| Memor | Bank (| Bank ^r | | |
| 1MB | (8) 256K x 4 | NONE | | |
| 2MB | (8) 256K x 4 | (8) 256K x 4 | | |