


# UNIDENTIFIED EG-2000

Category	Video
Video Types Supported	CGA/EGA/Monochrome
Video Processor	Unidentified
Highest Resolution Supported	640 x 480
Data Bus Type	8-bit ISA
Memory Type	DRAM
Maximum Onboard Memory	256KB (Exact location of memory is unidentified)

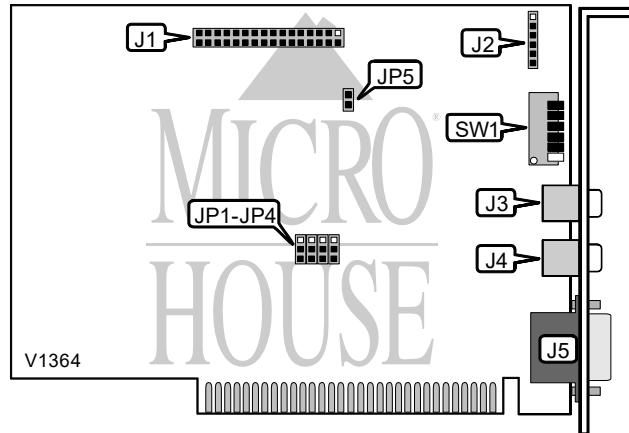

CONNECTIONS			
Purpose :	Location	Purpose :	Location
32-pin feature connector	J1	Composite display - RCA jack	J4
6-pin light pen connector	J2	15-pin analog video port	J5
Composite display - RCA jack	J3		

MODE TYPE SELECTION		
Type	SW1/1	SW1/2
EGA	On	On
CGA	Off	On
Monochrome	Off	Off

PRIMARY DISPLAY ADAPTER CONFIGURATION						
Primary	Secondary	JP5	SW1/1	SW1/2	SW1/3	SW1/4
Monochrome	80 x 25 text	Closed	Off	Off	On	Off
40 x 25 text	Monochrome	Closed	On	Off	Off	On
80 x 25 text	Monochrome	Closed	Off	Off	Off	On
640 x 200	Monochrome	Closed	On	On	On	Off
640 x 350	Monochrome	Closed	Off	On	On	Off
Monochrome	40 x 25 text	Closed	On	Off	On	Off

*Continued on next page . . .*

UNIDENTIFIED  
EG-2000

...continued from previous page

SECONDARY DISPLAY ADAPTER CONFIGURATION						
Secondary	Primary	JP5	SW1/1	SW1/2	SW1/3	SW1/4
40 x 25 text	Monochrome	Closed	On	On	On	On
80 x 25 text	Monochrome	Closed	Off	On	On	On
640 x 200	Monochrome	Closed	On	Off	On	On
640 x 350	Monochrome	Closed	Off	Off	On	On
Monochrome	40 x 25 text	Open	On	On	Off	On
Monochrome	80 x 25 text	Open	Off	On	Off	On

EPROM BIOS CHIP SELECTION		
Setting	JP1	JP2
27128	Pins 1 & 2 closed	Pins 1 & 2 closed
27256	Pins 2 & 3 closed	Pins 2 & 3 closed

BASE I/O ADDRESS SELECTION	
Address	JP3
2xxh	Pins 1 & 2 closed
3xxh	Pins 2 & 3 closed

DISPLAY TYPE SELECTION	
Type	JP4
EGA	Pins 1 & 2 closed
CGA or Monochrome	Pins 2 & 3 closed