DIAMOND MULTIMEDIA SYSTEMS, INC. **VIPER VLB**


Category Video Types Supported Video **XVGA** Video Processor Weitek **Highest Resolution** 1280x1024

Supported

32-bit VESA Local Bus

Data Bus Type Memory Type DRAM/VRAM

Maximum Onboard Memory 2MB

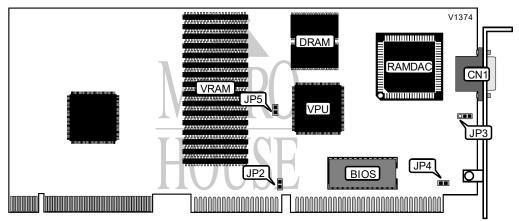

CONNECTIONS		
Purpose	Location	
15-pin analog video port	CN1	

IRQ2 CONFIGURATION		
IRQ2	JP3	
í Disabled	Pins 2 & 3 closed	
Enabled	Pins 1 & 2 closed	

ZERO WAIT STATE CONFIGURATON		
Setting	JP4	
í Enabled	Closed	
Disabled	Open	

VRAM CONFIGURATION		
Setting	JP5	
2MB	Open	
1MB	Closed	
Note: On some versions of the card, jumper JP5 may not be present.		

Continued on next page. . .

DIAMOND MULTIMEDIA SYSTEMS, INC. VIPER VLB

. . .continued from previous page

MONOCHROME CONFIGURATION		
Setting	JP2	
í No secondary monochrome adapter present	Closed	
Secondary monochrome adapter is experiencing problems	Open	

DRAM/VRAM CONFIGURATION		
The Viper VLB comes in 1MB or 2MB versions. The exact configuration of VRAM and DRAM is unidentified.		