

Declaration of conformity



QUANTUM DESIGNS(HK) LTD.

**5/F Somerset House, TaiKoo Place 979 Kings Road,
Quarry Bay, Hong Kong**

declares that the product

**Mainboard
KinetiZ 7A**

is in conformity with

(reference to the specification under which conformity is declared in
accordance with 89/336 EEC-EMC Directive)

- EN 55022 Limits and methods of measurements of radio disturbance characteristics of information technology equipment
- EN 50081-1 Generic emission standard Part 1:
Residential, commercial and light industry
- EN 50082-1 Generic immunity standard Part 1:
Residential, commercial and light industry

European Representative:

QDI COMPUTER (UK) LTD	QDI COMPUTER (SCANDINAVIA) A/S
QDI SYSTEMHANDEL GMBH	QDI COMPUTER (NETHERLANDS) B.V.
QDICOMPUTER (FRANCE) SARL	QDICOMPUTERHANDELSGMBH
QDI COMPUTER (ESPANA) S.A.	QDICOMPUTER (SWEDEN) AB

Signature :  Place / Date : HONG KONG/2000

Printed Name : Anders Cheung Position/ Title : President

Declaration of conformity



Trade Name: QDI Computer (U. S . A.) Inc.

Model Name: KinetiZ 7A

Responsible Party: QDI Computer (U. S. A.) Inc.

Address: 41456 Christy Street

Fremont, CA 94538

Telephone: (510) 668-4933

Facsimile: (510) 668-4966

Equipment Classification: FCC Class B Subassembly


Type of Product: Mainboard

Manufacturer: Quantum Designs (HK) Inc.

Address: 5/F, Somerset House, TaiKoo Place
979 Kings Road, Quarry Bay, HONG
KONG

Supplementary Information:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

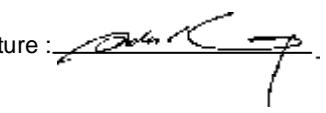Signature :  Date : _____ 2000



CONTENTS

Facilité de vitesse Initialisation(Francais)	1
1. Introduction	3
Overview	3
Key Features	3
Introduction to New Features	5
2. Installation Instructions	7
External Connectors	7
PS/2 Keyboard & PS/2 Mouse Connector	7
USB1 & USB2	7
USB3 & USB4	7
Parallel Port Connector and Serial Port Connector	8
Line-in jack, Microphone-in jack, Speaker-outjack and MIDI/Joystickconnector	8
ATX Power Supply Connector & Power Switch(POWER SW)	8
Hard Disk LED Connector (HD LED)	9
Reset Switch (RESET)	9
Speaker Connector (SPEAKER)	9
Power LED Connector(PWR_LED)	9
ACPI LED Connector (ACPI_LED)	9
GREENLEDConnector(GREEN_LED)	9
HardwareGreen Connector(SLEEP)	9
Fan Connector (CPUFAN & CHSFAN)	10
Wake-Up On LAN(WOL)	10
Wake-Up On Internal Modem (WOM)	11
InternalAudioConnectors(AUX,CDLIN, MODEM)	11
Audio/ModemRiser Interface Connector(AMR)	12
Chassis Security Switch (CHSSEC)	12
Infrared Header (IrDA)	12
Expansion Slots & I/O Ports description	13
Jumper Settings	13
Suspend to RAM Switch(J13)	13





CONTENTS

BIOS-ProtectEasy Jumper(JAV)	14
ClearCMOS(JCC)	14
OverclockingJumper Setting (JFSB)	15
Enable/Disable onboard audio(JSD)	15
3. BIOS Description	17
Utility Support	17
AWDFLASH.EXE	17
AWARD BIOS Description	18
Entering Setup	18
Load Fail-Safe Defaults	18
Load Optimized Defaults	18
Standard CMOS Features Setup	18
Advance BIOSFeatures Setup	22
Advance Chipset Features Setup	24
IntegratedPeripherals	26
Power Management Setup	28
PnP/PCI Configurations Setup	30
PC Health Status	31
Frequency/Voltage Control	32
Set Supervisor/User Password	33
Boot with BIOS defaults	33
Appendix A QDI Driver CD 2000	35
Appendix B Boot Logo	37
RecoveryEasy	39
Introduction	39
Operation Process	39
FAQ	44



Installation de la carte mère KinetiZ 7A

1. Assurez-vous que votre ensemble est complet: carte mère, câbles IDE et FLOPPY, notice d' utilisation et CD-ROM d' installation.
2. Vérifiez que l' alimentation est débranchée et reliez-vous à la terre par une courroie à votre poignet. A défaut, maintenez le contact de vos deux mains avec un objet lui-même relié à la terre, ou une partie en métal de votre système.
3. Fixez la carte mère dans le boîtier grâce aux vis fournies avec celui-ci.
4. Insérez le processeur dans son logement avec son ventilateur que vous brancherez au connecteur «CPUFAN».
5. Insérez la/les barrette(s) mémoire dans les slots DIMM.
6. Installez vos éventuelles cartes PCI et AMR dans les slots prévus à cet effet (voir page centrale du manuel).
7. Branchez vos périphériques IDE et FLOPPY sur les connecteurs prévus à cet effet grâce aux nappes fournies avec la carte. Vérifiez que le sens de branchement est correct (liseré rouge du câble sur la broche 1 du connecteur).
8. Reliez les câbles du boîtier aux connecteurs prévus à cet effet (Connecteur d' alimentation, LED de marche/arrêt, disque dur, haut-parleur..). Refermez le boîtier.
9. Branchez les périphériques externes sur les sorties du fond de panier: clavier, souris PS/2, périphériques USB, moniteur, imprimante...
10. Lorsque tous les éléments du système sont installés physiquement, rebranchez l' unité centrale.



Installation du KinetiZ 7A système

1. Chipset:

Les pilotes des chipsets VIA du répertoire \ChipDrv\Via peuvent être utilisés sur cette carte mère.

Insérez le CD-ROM dans votre lecteur et cliquez sur « Chipset Driver » pour installer les pilotes

2. Logiciel PC-cillin 98:

Pour Windows 95/98, version anglaise, dans le répertoire \Pccillin\Win9X. Lancez setup.exe pour l' installation.

Pour Windows NT version anglaise, il se trouve dans le répertoire \Pccillin\Winnt40, lancez setup.exe.

Numéro de série: PNEF-9991-6558-5857-5535.

3. QDI ManageEasy:

Lancez le setup.exe du répertoire \QME pour installer le ManageEasy. Pour des informations détaillées sur le ManageEasy, référez-vous au manuel ManageEasy du répertoire \Doc.

N' oubliez pas de redémarrer votre système pour que les changements soient pris en compte.

4. RecoveryEasy

RecoveryEasy™, la dernière innovation de QDI, permet de protéger le système des destructions encréant une «partition miroir» de la partition courante du disque dur et en sauvegardant toutes les données dans ce «miroir».

Cette utilitaire fournit partition du disque, récupération/sauvegarde des données, récupération/sauvegarde des réglages du CMOS et fonctions multi-boot.

RecoveryEasy permet également la protection du système contre les divers types de virus de boot tels que CIH. Dans le cas où le système est perdu soit par erreur, soit à cause d'un virus, il peut être récupéré depuis la partition miroir. Cette innovation utilise la technologie du Bios intégré qui n' occupe ni l'espace disque, ni la mémoire du système. C'est la solution idéale pour l'utilisateur.

Il faut presser les touches Ctrl + Bksp et F12 pour entrer dans les interfaces «Recovery» et «Partition» durant le démarrage du Bios.

ATTENTION : lisez attentivement le manuel du RecoveryEasy traduit sur le CD-ROM QDI avant d' installer cette fonction.

Très important : n' oubliez pas votre mot de passe, faute de quoi vous n' auriez plus accès au RecoveryEasy, même après avoir effectué un Clear CMOS.



Manual for KinetiZ 7A



Chapter 1

Introduction

Overview

The KinetiZ 7A green mainboard utilizes the VIA Apollo KX-133 chipset, providing a cost-effective PC/ATX platform with perfect capability and high performance to support AMD Slot A Athlon processors. The VIA®VT8371 chipset and VIA®VT82C686A chipset provide some new features such as AGP 4X mode and UltraDMA66. Equipped with three memory module sockets, PC133MHz SDRAM and 768MB PC133 ECC or non-ECC SDRAM DIMMs can be supported. It also provides advanced features such as wake-up on LAN and wake-up on internal/external modem function. Suspend to RAM, the optimal implementation of the Advanced Configuration and Power Interface(ACPI) specification, makes the PC's power consumption drop to the lowest possible level and enable quick wakeup. ManageEasy, our system management application is also supplied to enable remote monitoring and configuration of the system.

Key Features

Form factor

- ATX form factor of 305mm x210mm.

Microprocessor

- Supports AMD Slot A Athlon processors at 500/550/600/650/700/750/800/850MHz and future processors.
- Supports 200MHz host bus.
- On-board VDDQ(for AGP), VRAM(for LI Cache), 2.5V regulators and 3.3V switching power supply.
- Multiphase power from 1.30 - 2.05V for Athlon Processors.

Chipset

- Apollo KX-133 chipset: VT8371, VT82C686A.

System memory

- Provides three 168 pin DIMM sockets, supports 768MB PC100/133 ECC or non-ECC SDRAM DIMMs, VCM and SDRAM.
- Minimum memory size is 8MB, maximum memory size is 1.5G MB.
- SDRAM 64 bit data interface with ECC support.

On-board IDE

- Supports two PCIPIO and Bus Master IDE ports.
- Two fast IDE interfaces supporting four IDE devices including IDE hard disks and CD-ROM drives.
- Supports "Ultra DMA/33" Synchronous DMA mode transferring up to 33 Mbytes/sec.
- Supports "Ultra DMA/66" Synchronous DMA mode transferring up to 66 Mbytes/sec.
- Integrated 16x32bit buffer for IDE PCI Burst Transfers.



On-chip I/O

- One floppy port supporting up to two 3.5" or 5.25" floppy drives with 360K/720K/1.2M/1.44M/2.88M format.
- Two high speed 16550 fast compatible UARTs(COM1/COM2/COM3/COM4 selective) with 16-byte send/receive FIFOs.
- One enabled parallel port at the I/O address 378H/278H/3BCH with additional bi-direction I/O capability and multi-mode as SPP/EPP/ECP (IEEE 1284 compliant).
- Circuit protection provided, preventing damage to the parallel port when a connected printer is powered up or operated at a high voltage.
- Supports LS-120 floppy disk drive and Zip drive.
- All I/O ports can be enabled/disabled in the BIOS setup.

On-chip Audio

- Built-in VIA® 82C686A
- 16-bit Stereo Codec

AGP SLOT

- Supports 4X mode & AGP 2.0 compliant.

Advanced features

- PCI 2.2 Specification compliant.
- Provides Trend ChipAway Virus® On Guard and PC-Cillin software with killing virus function.
- Provides four USB ports, on-board PS/2 mouse and PS/2 keyboard ports.
- Provides infrared interface.
- Supports PC99 color-coding connector Specification.
- Supports Windows 98/Windwos 2000 software power-down.
- Supports wake-up on LAN and wake-up on internal/external modem.
- Supports auto fan off when the system enters suspend mode.
- Provides on-board 3.3V regulator to support ATX power supply without 3.3V output.
- Supports system monitoring (monitors system temperature, CPU temperature, voltages, chassis intrusion and fan speed).
- Provides management application such as ManageEasy.
- Protects the system BIOS from being attacked by severe virus such as CIH, by enabling "BIOS-ProtectEasy" in CMOS setup or closing the Jumper "JAV".

BIOS

- Licensed advanced AWARD BIOS, supports flash ROM with 2M bit memory size, plug and play ready.
- Supports IDE CD-ROM or SCSI boot up.

Green function

- Supports ACPI (Advanced Configuration and Power Interface) and ODPM (OS Directed Power Management).
- Supports three green modes: Doze, Standby and Suspend.
- Supports ACPI power status: S0, S1, S3(STR), S5(Soft-off).

Expansion slots

- 1 ISA slot, 5 PCI slots, 1 AGP and 1 AMR.





Introduction to New Features

BIOS-ProtectEasy

The BIOS of the mainboard is contained inside the FlashROM. Severe viruses such as CIH virus are so dangerous that it may overwrite the BIOS of the mainboard. If the BIOS has been damaged, the system will be unable to boot. We provide the following solution which protects the system BIOS from being attacked by such viruses.

There are two choices which can implement this function.

1. Set the jumper (JAV) as closed, the BIOS can not be overwritten.
2. Set the jumper (JAV) as open, meanwhile set "BIOS-ProtectEasy" as Enabled in AWARD BIOS CMOS Setup. In this way, the BIOS can not be overwritten, but the DMI information can be updated.

Refer to page 14 for detailed information on jumper setting, and page 22 for related BIOS setting.

Ultra ATA/66

According to the previous ATA/IDE hard drive data transfer protocol, the signaling way to send data was in synchronous strobe mode by using the rising edge of the strobe signal. The Ultra ATA/33 protocol doubles the burst transfer rate from 16.6MB/s to 33.3MB/s, by using both the rising and falling edges of the strobe signal, this time Ultra ATA/66 doubles the Ultra ATA burst transfer rate once again (from 33.3MB/s to 66.6MB/s) by reducing setup times and increasing the strobe rate. The faster strobe rate increases EMI, which cannot be eliminated by the standard 40-pin cable used by ATA and Ultra ATA. To eliminate this increase in EMI, a new 40-pin, 80-conductor cable is needed. This cable adds 40 additional ground lines between each of the original 40 ground and signal lines. The additional 40 lines help shield the signal from EMI, reduce crosstalk and improves signal integrity.

Ultra ATA/33 introduced CRC (Cyclical Redundancy Check), a new feature of IDE that provides data integrity and reliability. Ultra ATA/66 uses the same process. The CRC value is calculated by both the host and the hard drive. After the host-request data is sent, the host sends its CRC to the hard drive, and the hard drive compares it to its own CRC value. If the hard drive reports errors to the host, then the host retries the command containing the CRC error.

Ultra ATA/66 technology increases both performance and data integrity. However there are basically five requirements for your system to run in Ultra ATA/66 mode:

1. The system board must have a special Ultra ATA/66 detect circuit, such as KinetiZ 7A mainboard.
2. The system BIOS must also support Ultra ATA/66.
3. The operating system must be capable of DMA transfers. Win95 (OSR2), Win98 and WindowsNT are capable.
4. An Ultra ATA/66 capable, 40-pin, 80-conductor cable is required.
5. Ultra ATA/66 compatible IDE device such as a hard drive or CD-ROM drive.



PC-133 Memory

PC133 SDRAM Unbuffered DIMM defines the electrical and mechanical requirements for 168-pin, 3.3 Volt, 133MHz, 64/72-bit wide, Unbuffered Synchronous DRAM Dual In-Line Memory Modules (SDRAM DIMMs). Relatively , the peak bandwidth of PC-133 memory is the 33% higher than PC-100 memory. These latest SDRAMs are necessary to meet the enhanced 133MHz bus speed requirement.

Suspend to RAM

Suspend to RAM is a cost-effective, optimal implementation of the Advanced Configuration and Power Interface (ACPI) 1.0 specification, which makes a PC' s power consumption drop to the lowest possible level and enables quick wakeup. When the system is in Suspend-to-RAM status, the system context is maintained in system memory, the system consumes only a small fraction of the power used for full operation. Instead of shutting down the system to save power when not in use and then having to reboot later, Suspend-to-RAM solution enables the system to quickly wake up, restoring all applications and features, enabling operation in a few seconds.

To implement this function, the following requirements are essential:

1. Power supply requirements: The current of 5VSB line of the power supply should be more than 0.75A.
2. Set the Jumper J13 with pin1&pin2 closed. Refer to page 13 for detailed information.
3. The BIOS option "ACPI function" should be enabled, and "ACPI SuspendType" should be set as S3 in AWARD BIOS CMOS setup. Refer to page 28 for detailed information.
4. An ACPI-enabled operating system such as Windows 98 or Windows 2000 family is needed. Navigate to the CD-ROM drive from the MS-DOS Command Prompt and enter the following from the Win98 directory on the CD:

D:\SETUP /P J

(This manual assumes that your CD-ROM device driver letter is D:)

Windows 98 will be installed with ACPI enabled.

For Windows 98 SE and Windows 2000, just install them directly.

5. Three ways to enter Suspend-to-RAM status under ACPI-enabled Windows 98:
 - Click Start -> Shut down -> Standby to enable the system to enter Suspend-to-RAM status.
 - Click Start -> Setup -> Control Panel -> Power Management -> Advanced and choose Standby item, the system will enter Suspend-to-RAM status when you press power button.
 - From Power Management Properties in Control Panel, set the latency time in System Standby, the system will enter Suspend-to-RAM status when time out.

The same ways used to power up the system can be used to wake up the system from Suspend-to-RAM status. For example, pushing the power button, through the Wake-on-LAN, Wake-on-Modem function or RTC Alarm.





Chapter 2

Installation Instructions


This section covers External Connectors and Jumper Settings. Refer to the mainboard layout chart for locations of all jumpers, external connectors, slots and I/O ports. Furthermore, this section lists all necessary connector pin assignments for your reference. The particular state of the jumpers, connectors and ports are illustrated in the following figures. Before setting the jumpers or inserting these connectors, please pay attention to the directions.

Be sure to unplug the AC power supply before adding or removing expansion cards or other system peripherals, otherwise your mainboard and expansion cards might be seriously damaged.

External Connectors


PS/2 Keyboard Connector, PS/2 Mouse Connector

PS/2 keyboard connector is for the usage of PS/2 keyboard. If using a standard AT size keyboard, an adapter should be used to fit this connector. PS/2 mouse connector is for the usage of PS/2 mouse.

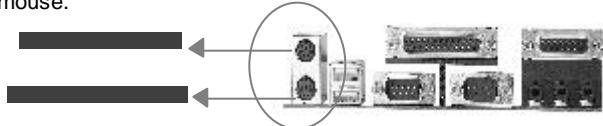


USB1, USB2

Two USB ports are available for connecting USB devices.

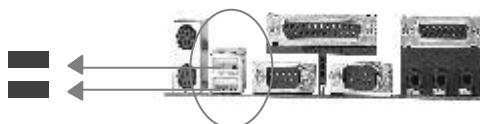

USB3, USB4


Two USB ports are not available on the back panel. Therefore, we provide a 10-pin ribbon cable with bracket to connect Built-in on-board USB header. (manufacturing option)

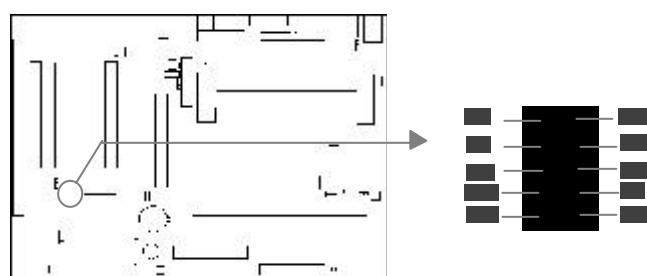



Parallel Port Connector and Serial Port Connector (UART1, UART2)


The parallel port connector can be connected to a parallel device such as a printer, while the serial port connector can be connected to a serial port device such as a serial port mouse. You can enable/disable them and choose the IRQ or I/O address in "Integrated Peripherals" from AWARD BIOS SETUP.

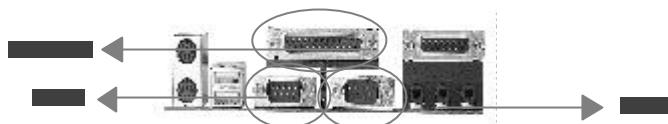

Line-in jack, Microphone-in jack, Speaker-out jack and MIDI/Joystick connector


The Line-in jack can be connected to devices such as a cassette or minidisc player for playback or recording. The Microphone-in jack can be connected to a microphone for voice input. The Speaker-out jack allows you to connect speakers or headphones for audio output from the internal amplifier.

The MIDI/Joystick connector allows you to connect a game joystick or a MIDI device.

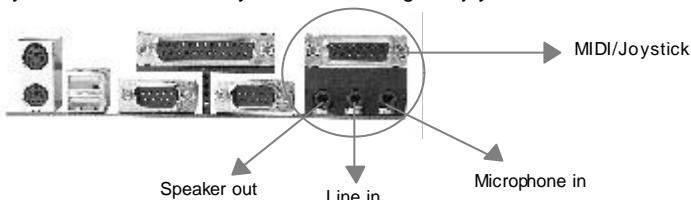

ATX Power Supply Connector & Power Switch (POWER SW)

Be sure to connect the power supply plug to this connector in its proper orientation. The power switch (POWER SW) should be connected to a momentary switch (power button). When powering up your system, first turn on the mechanical switch of the power supply (if one is provided), then push once the power button. When powering off the system, you needn't turn off the mechanical switch, just **Push once** the power button.

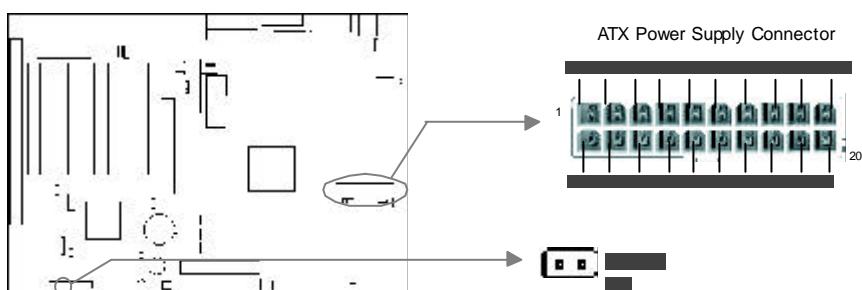

Note: * If you change "soft-off by PWR-BTTN" from default "Instant-off" to "Delay 4 Secs" in the "POWER MANAGEMENT SETUP" section of the BIOS, the power button should be pressed for more than 4 seconds before the system powers down.





Hard Disk LED Connector (HD LED)

The connector connects to the case's IDE indicator LED indicating the activity status of IDE hard disk. The connector has an orientation. If one way doesn't work, try the other way.

Reset Switch (RESET)

The connector connects to the case's reset switch. Press the switch once, the system resets.

Speaker Connector (SPEAKER)

The connector can be connected to the speaker on the case.

Power LED Connector (PWRLED)

The power LED has four status. When the system is in power up status, the LED is on. When the system is in suspend status, the LED is blink. When the system is in Suspend to RAM, the LED is off. When the system is in Soft-Off status, the LED is off. The connector has an orientation.

ACPI LED Connector (ACPI_LED)(Reserved)


The ACPI LED is double-color lights with three pins. Pin1&Pin2 drive different color lights. If Pin1 drives the yellow light, Pin2 drives the green light, the following status will come out. When the system is in power up status, the LED is green on. When the system is in suspend status, the LED is green blink. When the system is in suspend to RAM status, the LED is orange on. When the system is in soft-off status, the LED is off.


GREEN LED Connector (GREEN_LED)

The GREEN LED has four status. When the system is in three status (including power up, suspend, soft-off), the LED is off. When the system is in suspend to RAM status, the LED is on.

Hardware Green Connector (SLEEP)


Push once the switch connected to this header, the system enters suspend mode.

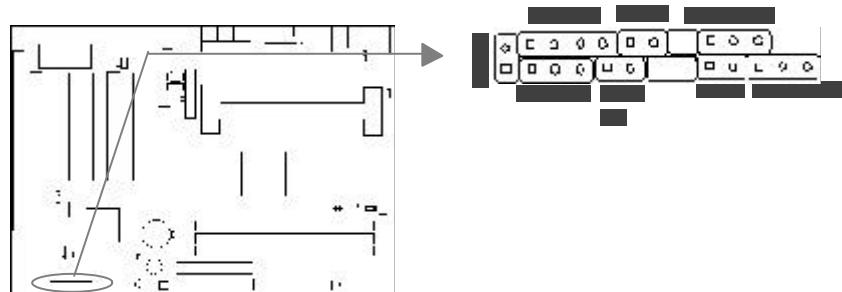

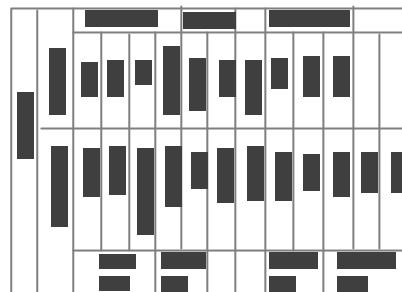


Fan Connector (CPUFAN, CHSFAN)

The fanspeed of these two fans can be detected and viewed in "PC Health Status" section of the BIOS. They will be automatically turned off after the system enters suspend mode.

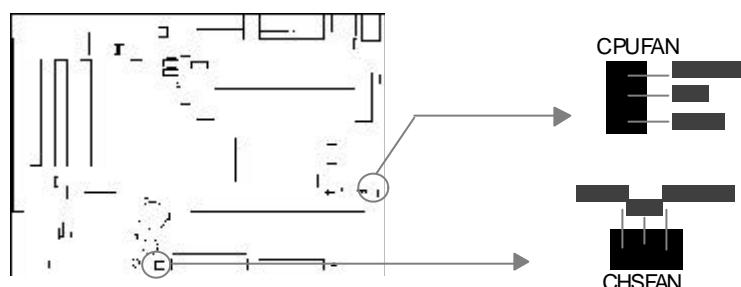

Wake-Up On LAN (WOL)


Through the Wake-Up On LAN function, a wake event occurring from the network can wake up the system. If this function is to be used, please be sure an ATX 2.01 power supply of which 5VSB line is capable of delivering 720mA, and a LAN adapter which supports this function are used. Then connect this header to the relevant connector on the LAN adapter, set "Wake Up On LAN/Ring" as Enabled in the "POWER MANAGEMENT SETUP" section of the BIOS. Save & exit, then boot the operating system once to make sure this function takes effect.

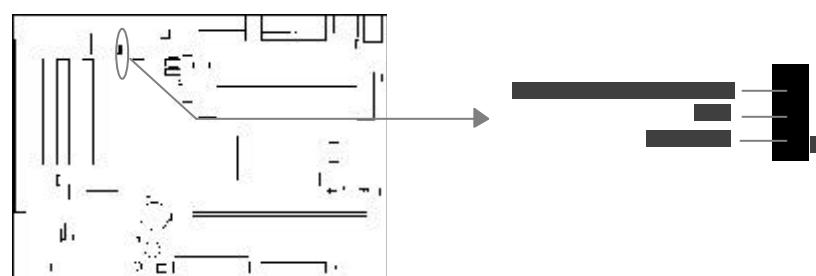




Wake-Up On Internal Modem (WOM)

Through the Wake-Up On Internal Modem function, the system which is in the power-off status can be powered on by a ring signal received from the internal modem. If this function is to be used, be sure an internal modem card which supports the function is used. Then connect this header to the relevant connector on the modem card, set "Wake Up On LAN/Ring" as Enabled in the "POWER MANAGEMENT SETUP" section of the BIOS. Save & exit, then boot the operating system once to make sure this function takes effect.

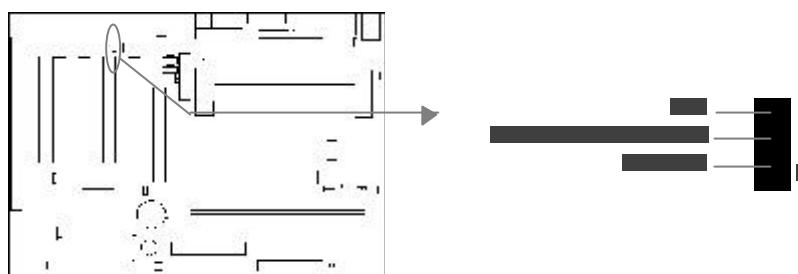

Internal Audio Connectors (AUX, CDLIN, MODEM)


AUX and CDLIN connectors allow you to receive stereo audio input from such sound sources as a CD-ROM, TV tuner, or MPEG card. The MODEM connector allows the onboard audio to interface with a voice modem card with a similar connector. It also allows the sharing of mono_in (such as a phone) and mono_out (such as a speaker) between the onboard audio and the voice modem card.

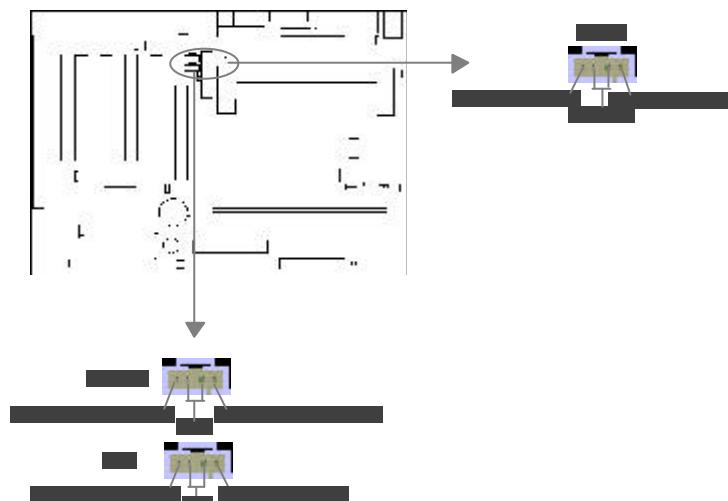




Audio/Modem Riser Interface Connector (AMR)

The AMR Interface Connector is the interface between the mainboard and the Audio/Modem Riser card. The connector provides all necessary signals which supports several different configurations of audio and modem in the system, such as audio and modem on the Riser, audio on the mainboard and modem on the Riser, or no audio with modem on the Riser. KinetiZ 7A mainboard provides you with audio onboard solution, onboard audio can be enabled/disabled. Either AMR (Audio/Modem Riser) card or MR (Modem Riser) card can be used on this system. This software configurable AC'97 audio and modem system gives customers an advanced, multimedia solution at an extremely low price. The AC'97 audio and modem system can be enabled/disabled in "Integrated Peripherals" in AWARD BIOS CMOS Setup.

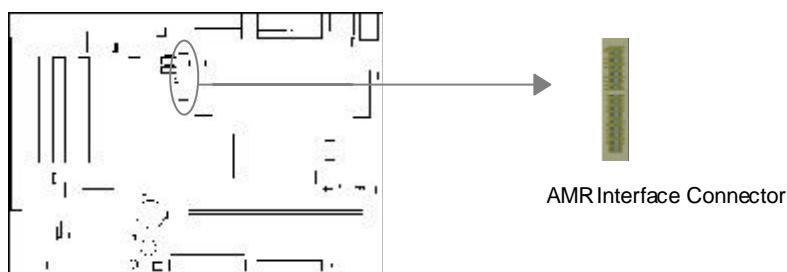

Chassis Security Switch (CHSSEC)


The connector connects to the chassis security switch on the case. The system can detect the chassis intrusion through the status of this connector. If the connector has been closed once, the system will record the status and indicate the chassis has been opened. You can receive this information from QDI ManageEasy software.

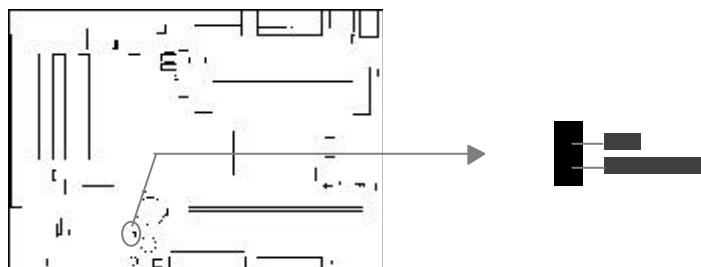

Infrared Header (IrDA)

This connector supports wireless transmitting and receiving. If using this function, set "UART 2 Mode" to HPSIR or ASKIR and configure the settings from the "INTEGRATED PERIPHERALS" section of the BIOS.



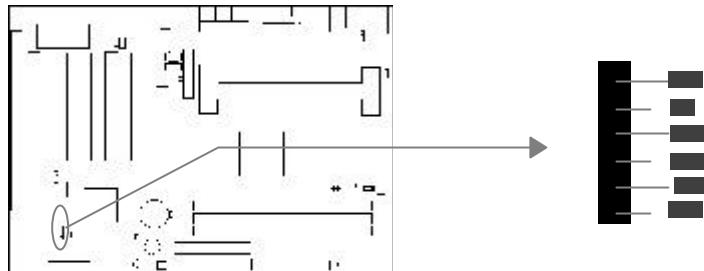

Expansion Slots & I/O Ports description

Slot / Port	Description
PCI1	First PCI slot.
PCI2	Second PCI slot.
PCI3	Third PCI slot.
PCI4	Fourth PCI slot.
PCI5	Fifth PCI slot.
DIMM1	First DIMM slot.
DIMM2	Second DIMM slot.
DIMM3	Third DIMM slot.
IDE1	Primary IDE port.
IDE2	Secondary IDE port.
AMR	AMR slot.
AGP	AGP slot.
FLOPPY	Floppy Drive Port.

Jumper Settings

Jumpers are located on the mainboard. Pin 1 for all jumpers are located on the side with a thick white line (Pin1 →), refer to the mainboard's silkscreen . Jumpers with three pins will be shown as to represent pin1 & pin2 connected and to represent pin2 & pin3 connected.

Suspend to RAM Switch (J13)


If you want to Disable Suspend to RAM function, set J13 with pin2&pin3 closed, meanwhile, set “ACPI Suspend Type” to S1 in “Power Management Setup” section of the BIOS. Otherwise, set J13 with pin1&pin2 closed for implementing this function.

Warning: If you set J13 with pin2&pin3 closed and set “ACPI Suspend Type” to S3 in “Power Management Setup” section of the BIOS, the blank screen will come out, in this case, just clear CMOS and boot up the system once again.





Installation Instruction

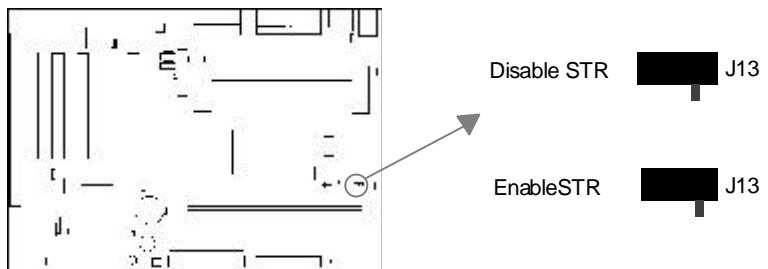

BIOS-ProtectEasy Jumper (JAV)

The BIOS of the mainboard is contained inside the Flash ROM. If the jumper JAV is set as closed, you will be unable to flash the BIOS to the mainboard. However in this status, the system BIOS is protected from being attacked by serious virus such as CIH virus.




Setting the jumper JAV as open(default), meanwhile disabling the "BIOS_ProtectEasy" item from "Advanced BIOS Features" in AWARD BIOS CMOS Setup, allows you to flash the BIOS to the Flash ROM.

The DMI (Desktop Management Interface) system information such as the CPU type/speed, memory size, and expansion cards will be detected by the onboard BIOS and stored in the flash ROM. Whenever the system hardware configuration is changed, DMI information will be updated automatically. However, setting jumper JAV as closed makes flashing BIOS and updating DMI information impossible. Therefore, set JAV as closed when changing the system hardware configuration, or the error message "Unknown Flash Type" will be displayed on the screen, and DMI information update will fail.

Clear CMOS (JCC)


If you want to clear CMOS, unplug the AC power supply first, close JCC (pin1 & pin2) once, set JCC back to the normal status with pin2 & pin3 connected, then power on the system.



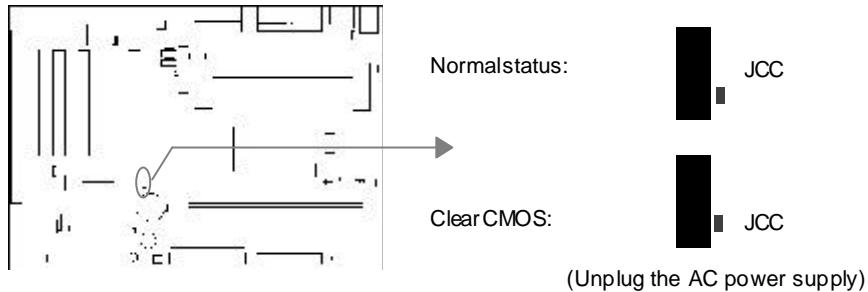

Overclocking Jumper Setting (JFSB)


Jumpers labeled JFSB is located on the mainboard providing users with CPU overclocking feature. The host bus speed can be set as 100/133MHz. Refer to the chart below for the location of these jumpers, and the table for information on how to set them.

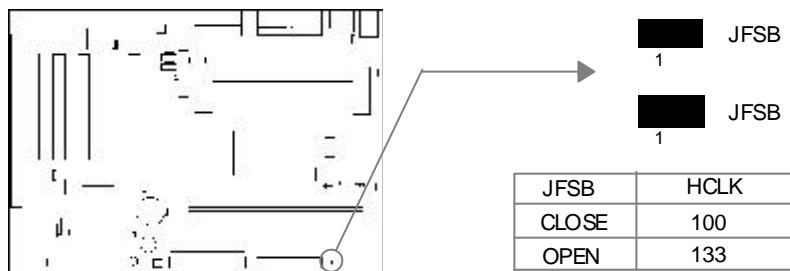

Enable/Disable on-board audio(JSD)

If you want to use the on-board audio, set JSD with pin2 & pin3 closed (default).

Otherwise, set JSD with pin1 & pin2 closed for disabling this function.

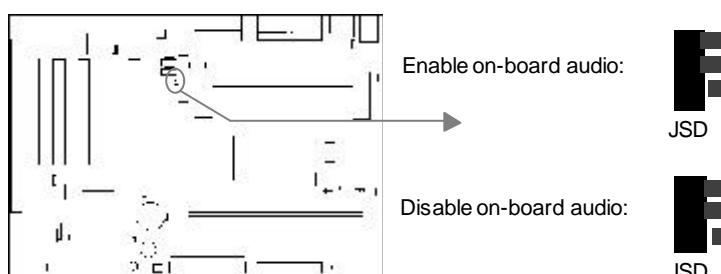



Installation Instruction

-- This page is intentionally left blank --



Manual for KinetiZ 7A



Chapter 3

BIOS Description

Utility Support:

AWDFLASH.EXE

This is a flash memory write/read utility used for the purpose of upgrading your BIOS when necessary. Before doing so, please note:

- We strongly recommend you only upgrade BIOS when encounter problems.
- Before upgrading your BIOS, review the description below to avoid making mistakes, destroying the BIOS and resulting in a non-working system.

When you encounter problems, for example, you find your system does not support the latest CPU released on our current mainboard, you may therefore upgrade the BIOS, please don't forget to set JAV as closed and disable the "BIOS_ProtectEasy" item in AWARD BIOS CMOS Setup first .

Follow the steps exactly for a successful upgrade.

1. Create a bootable system floppy diskette by typing Format A:/s from the DOS prompt under DOS6.xx or Windows 9x environment.
2. Click "Browse CD" option under QDI Driver CD 2000, copy Awdflash.exe (version>7.36) from the directory \Utility onto your new bootable diskette.
3. Download the updated BIOS file from the Website (<http://www.qdigrp.com>). Please be sure to download the suitable BIOS file for your mainboard.
4. Decompress the file downloaded, copy the BIOS file (xx.bin) onto the bootable diskette, and note the checksum of this BIOS which is located in readme file.
5. Reboot the system from the bootable diskette created.
6. Then run the Awdflash utility at the A:\ prompt as shown below:

A:\Awdflash xxxx.bin

Follow the instruction through the process. Don't turn off power or reset the system until the BIOS upgrade has been completed.

If you require more detailed information concerning Awdflash Utility, for example, the different usage of parameters, please type A:\>Awdflash /?

Note: There's a shortcut to update your BIOS by pressing "Alt+F2" in POST and inserting the floppy which contains the updated file. The system will automatically update it.



AWARD BIOS Description

Entering Setup

Power on the computer, when the following message briefly appears at the bottom of the screen during the POST (Power On Self Test), press key or simultaneously press the <Ctrl> + <Alt> + <Esc> keys, to enter the AWARD BIOS CMOS Setup Utility.

Press to enter SETUP

Once you have entered, the Main Menu (Figure 1) appears on the screen. The main menu allows you to select from twelve setup functions and two exit choices. Use the arrow keys to select among the items and press the <Enter> key to accept or enter the submenu.



Figure-1 Main Menu

Load Fail-Safe Defaults

The Fail-Safe Defaults are secure and useful for system. It is recommended that users load the Fail-Safe Defaults when the system is in trouble.

Load Optimized Defaults

The Optimized Defaults are common and efficient. It is recommended that users load the optimized defaults first, then modify the needed configuration settings.

Standard CMOS Features Setup

The basic CMOS settings included in "Standard CMOS Features" are Date, Time, Hard Disk Drive Types, Floppy Disk Drive Types, and VGA etc. Use the arrow keys to highlight the item, then use the <PgUp> or <PgDn> keys to select the value desired in each item.





Figure-2 Standard CMOS Setup Menu

For the items marked, press enter, a window will pop up as shown below. You can view detailed information or make modifications.



Figure-2-1 IDE Primary Master Setup Menu

Hard Disk

Primary Master/Primary Slave/Secondary Master/Secondary Slave

These categories identify the HDD types of 2 IDE channels installed in the computer system. There are three choices provided for the Enhanced IDEBIOS: None, Auto, and User. 'None' means no HDD is installed or set; 'Auto' means the system can auto-detect the hard disk when booting up; by choosing 'User', the related information should be entered regarding the following items. Enter the information directly from the keyboard and press <Enter>:

CYLS	number of cylinders	HEAD	number of heads
PRECOMP	write pre-compensation	LANDZ	landing zone
SECTOR	number of sectors	MODE	HDD access mode





BIOSDescription

The AwardBIOS supports 3HDD modes: NORMAL, LBA and LARGE.

NORMAL

Generic access mode in which neither the BIOS nor the IDE controller will make any transformation during accessing. The maximum number of cylinders, heads and sectors for NORMAL mode are 1024,16 and 63.

If the user sets his HDD to NORMAL mode, the maximum accessible HDD size will be 528 megabytes even though its physical size may be greater than that.

LBA (Logical Block Addressing) mode

A new HDD accessing method to overcome the 528 Megabyte bottleneck. The number of cylinders, heads and sectors shown in setup may not be the number physically contained in the HDD.

During HDD accessing, the IDE controller will transform the logical address described by sector, head and cylinder number into its own physical address inside the HDD.

LARGE mode

Some IDE HDDs contain more than 1024 cylinder without LBA support (in some cases, users do not want LBA). The Award BIOS provides another alternative to support these kinds of HDD.

BIOS tricks DOS (or other OS) into dividing the number of cylinders less than 1024 by dividing it by 2. At the same time, the number of heads is multiplied by 2. A reverse transformation process will be made inside INT13h in order to access the right HDD address.

If using Auto detect, the BIOS will automatically detect the IDE hard disk mode and set it as one of the three modes.

Remark

To support LBA or LARGE mode of HDDs, there must be some softwares involved which are located in Award HDD Service Routine(INT13h). It may fail to access a HDD with LBA (LARGE) mode selected if you are running under an Operating System which replaces the whole INT 13h.





Video

Set this field to the type of video display card installed in your system.

EGA/ VGA	Enhanced Graphics Adapter / Video Graphic Array. For EGA, VGA, SEGA, SVGA, or PGA monitor adapters.
CGA 40	Color Graphic Adapter, powering up in 40 column mode.
CGA 80	Color Graphic Adapter, powering up in 80 column mode.
MONO	Monochrome adapter, including high resolution monochrome

Halt On

This category determines whether or not the computer will stop if an error is detected during powering up.

No errors	The system boot will not stop for any errors that may be detected.
All errors	Whenever the BIOS detects a non-fatal error, the system will stop and you will be prompted.
All, But Keyboard	The system boot will not stop for a keyboard error; but it will stop for all other errors.
All, But Diskette	The system boot will not stop for a disk error; but it will stop for all other errors.
All, But Disk/Key	The system boot will not stop for a keyboard or disk error, but it will stop for all other errors.

Memory

This is a Display-Only Category, determined by POST (Power On Self Test) of the BIOS.

BaseMemory	The POST of the BIOS will determine the amount of base (or conventional) memory installed in the system.
ExtendedMemory	The BIOS determines how much extended memory is presented during the POST.
TotalMemory	Total memory of the system equals the sum of the above memory.





Advanced BIOS Features Setup


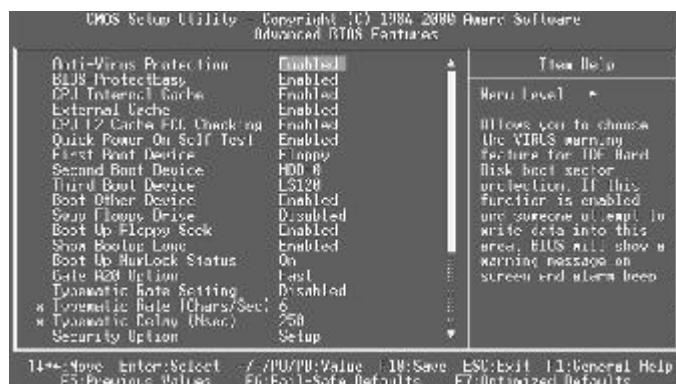


Figure-3 Advanced BIOS Features Setup Menu

The following indicates the options for each item and describes their meaning.

<u>Item</u>	<u>Option</u>	<u>Description</u>
• Anti-Virus Protection	Enabled	Allows you to choose the VIRUS warning feature for IDE Hard Disk boot sector protection. If this function is enabled and someone attempt to write data into this area, BIOS will show a warning message on screen and alarm beep.
	Disabled	Invalidates this function.
• BIOS-ProtectEasy	Enabled	Enabling this item can protect your BIOS from being attacked by severe virus (suchas CIH) or accidentally writing. Therefore disable this item only when you want to flash BIOS, afterwards set this item as Enabled (default).
	Disabled	Disabling this item allows you to upgrade the BIOS.
• CPU Internal Cache	Enabled	Enables CPU internal Level1/Level2 cache.
	Disabled	Disables CPU internal Level1/Level2 cache.
• CPUL2 Cache ECC Checking	Enabled	Enables CPU L2 Cache ECC function.
	Disabled	Disables CPU L2 Cache ECC function.
• Quick Power On Self Test	Enabled	Enables quick POST. BIOS will shorten or skip some check items during POST to speed up POST after you power on the computer.
	Disabled	NormalPOST.





• First (Second, Third) Boot Device	<i>Disabled</i>	Selects your Boot Device Priority. It could be Disabled, Floppy, LS/ZIP, HDD-0, HDD-1, HDD-2, HDD-3, SCSI, CDROM, LAN.
Boot other Device	<i>Floppy</i>	
• Swap Floppy Drive	<i>Enabled</i>	Exchanges the assignment of A&B floppy drives.
• Boot Up Floppy Seek	<i>Disabled</i>	The assignment of A&B floppy drives are normal.
• Show Bootup Logo	<i>Enabled</i>	Tests floppy drives to determine whether they have 40 or 80 tracks.
• Boot Up Numlock Status	<i>Disabled</i>	
• Gate A20 Option	<i>On</i>	Enables the logo when system boots up.
	<i>Off</i>	Logo will not be shown when system boots up.
	<i>Normal</i>	Keypad is used as number keys.
	<i>Fast</i>	Keypad is used as arrow keys.
• Typematic Rate Setting	<i>Enabled</i>	The A20 signal is controlled by the keyboard controller or chipset hardware.
	<i>Disabled</i>	Default setting. The A20 signal is controlled by Port 92 or the chipset specific method.
• Typematic Rate (Chars/Sec)	6-30	Keystrokes repeat at a rate determined by the keyboard controller - when enabled, the typematic rate and typematic delay can be selected.
• Typermatic Delay (Msec)	250-1000	The rate at which character repeats when you hold down a key.
• Security Option	<i>System Setup</i>	The delay before keystrokes begin to repeat.
• OS Select For DRAM>64MB	<i>Non-OS2</i>	Selects whether the password is required every time the system boots or only when you enter setup.
	<i>OS2</i>	If your operating system is not OS/2, please select this item.
• Video BIOS Shadow	<i>Enabled</i>	If system DRAM is more than 64MB and the operating system is OS/2, please select this item.
• C8000~CBFFF Shadow:	<i>Disabled</i>	Video BIOS will be copied to RAM. Video Shadow will increase the video speed.
... ...		Video shadow is disabled.
DC000-DFFFF Shadow:	<i>Enabled</i>	Optional ROM will be copied to RAM by 16K bytes per unit.
	<i>Disabled</i>	The shadow function is disabled.



Advanced Chipset Features Setup



Figure-4 Advanced Chipset Features Setup Menu

The following indicates the options for each item and describes their meaning.

<u>Item</u>	<u>Option</u>	<u>Description</u>
• Bank 0/1, 2/3, 4/5 DRAM Timing	<i>SDRAM 8ns</i> <i>SDRAM 10ns</i> <i>Normal</i> <i>Medium</i> <i>Fast</i> <i>Turbo</i>	These items are of selected SDRAM read/write timing. Ensure your DIMMs are as fast as 8ns, otherwise select 10ns. The faster you choose, the higher performance you can receive.
• SDRAM Cycle Length	<i>Auto/2/3</i>	Defines the CLT timing parameter of SDRAM expressed in 66MHz clocks. Latency Time = Auto, according to SDRAM SPD. Latency Time = 2 clocks. Latency Time = 3 clocks.
• Memory Hole	<i>Enabled</i>	Memory Hole at 15-16M is reserved for expanded ISA card.
• P2C/C2P Concurrency	<i>Disabled</i> <i>Enabled</i> <i>Disabled</i>	Does not set this memory hole. Enables P2C/C2P concurrency. Disables P2C/C2P concurrency. P2C means PCI to CPU, C2P means CPU to PCI.
• Fast R-W Turn Around	<i>Enabled</i> <i>Disabled</i>	Enables Fast R-W Turn Around. Disables Fast R-W Turn Around. R-W means Read to Write.
• System BIOS Cacheable	<i>Enabled</i> <i>Disabled</i>	Besides conventional memory, system BIOS area is also cacheable. System BIOS area is not cacheable.
• Video RAM Cacheable	<i>Enabled</i> <i>Disabled</i>	Besides conventional memory, video RAM is also cacheable. Video RAM area is not cacheable.





• AGP Aperture Size (MB)	<i>4~256</i>	Sets the effective size of the Graphics Aperture to be used in the particular GART Configuration.
• AGP-4X Mode	<i>Enabled</i> <i>Disabled</i>	Supports 4X mode. Does not support 4X mode.
• AGP Driving Control	<i>Auto</i> <i>manual</i>	Does not support 4X mode. The default setting is suggested.
• AGP Driving Value	<i>00 - FF</i>	Sets the AGP Driving Value when AGP Driving Control is set as manual.
• K7 CLK_CTL Select	<i>Optimal</i> <i>Default</i>	Default setting is recommended.
• Onchip USB	<i>Enabled</i> <i>Disabled</i>	Enables the onchip USB controller. Disables the onchip USB controller.
• USB Keyboard Support	<i>Enabled</i> <i>Disabled</i>	Legacy USB keyboard support is enabled. Legacy USB keyboard support is disabled.
• Onchip Sound	<i>Auto</i> <i>Disabled</i>	Enables AC97 function. Disables AC97 function.
• Onchip Modem	<i>Auto</i> <i>Disabled</i>	Enables MC97 function. Disables MC97 function.
• CPU to PCI Write Buffer	<i>Enabled</i> <i>Disabled</i>	Enables CPU to PCI Write Buffer. Disables CPU to PCI Write Buffer.
• PCIDynamic Bursting	<i>Enabled</i> <i>Disabled</i>	Enables PCI Dynamic Bursting. Disables PCI Dynamic Bursting.
• PCI Master 0 WS Write	<i>Enabled</i> <i>Disabled</i>	Enables PCI Master 0 WS Write. Disables PCI Master 0 WS Write.
• PCI Delay Transaction	<i>Enabled</i> <i>Disabled</i>	Enables PCI Delay Transaction. Disables PCI Delay Transaction.
• PCI#2 Access #1 Retry	<i>Enabled</i> <i>Disabled</i>	Enables PCI#2 Access #1 Retry. Disables PCI#2 Access #1 Retry.
• AGP Master 1 WS Write	<i>Enabled</i> <i>Disabled</i>	Enables AGP Master 1 WS Write. Disables AGP Master 1 WS Write.
• AGP Master 1 WS Read	<i>Enabled</i> <i>Disabled</i>	Enables AGP Master 1 WS Read. Disables AGP Master 1 WS Read.
• Memory Parity/ECC Check	<i>Enabled</i> <i>Disabled</i>	Enables the Error Checking & Correction if ECC memory is used. Disables the ECC function.



Integrated Peripherals

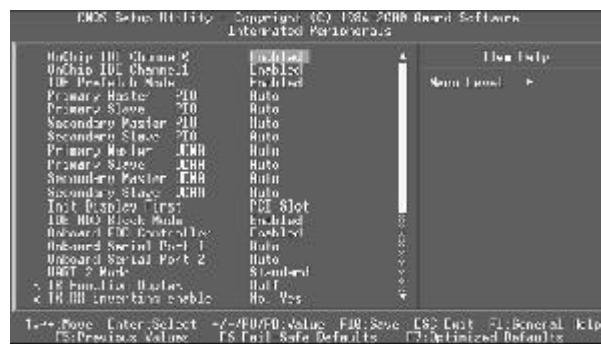


Figure-5 Integrated Peripherals Menu

• OnChip IDE channel 0/1	<i>Enabled</i>	Enables OnChip IDE First/Second Channel.
• IDE PrefetchMode	<i>Disabled</i>	Disables OnChip IDE First/Second Channel.
• IDE Primary/Secondary Master/SlavePIO	<i>Enabled</i>	Enables IDE Prefetch Mode.
• IDE Primary/Secondary Master/SlaveUDMA	<i>Disabled</i>	Disables IDE Prefetch Mode.
• Init Display First	<i>Mode 0 - 4</i>	Defines the IDE primary/secondary master/ slave PIO mode.
	<i>Auto</i>	The IDE PIO mode is defined by auto -detection.
	<i>Auto</i>	Ultra DMA mode will be enabled if an ultraDMA device is detected.
	<i>Disabled</i>	Disables this function.
	<i>PCI SLOT</i>	Initializes the PCI VGA first. If aPCI VGA card and an AGP card are installed together in the system, the one initialized first functions.
• IDE HDD Block Mode	<i>AGP</i>	Initializes the AGP first.
• OnboardFDD Controller	<i>Enabled</i>	Allows IDE HDD to read/write several sectors at once.
• Onboard Serial Port 1/2	<i>Disabled</i>	Onboard floppy disk controller is enabled.
	<i>3F8/IRQ4,</i>	Onboard floppy disk controller is disabled.
	<i>2F8/IRQ3,</i>	Defines the onboardserial portaddress and required interrupt number.
	<i>3E8/IRQ4,</i>	
	<i>2E8/IRQ3,</i>	
	<i>Auto</i>	Onboard serial port address and IRQ are automatically assigned
	<i>Disabled</i>	Onboard serialport is disabled.



• UART 2 Mode	<i>Standard</i> <i>HPSIR</i> <i>ASKIR</i>	Defines Serial Port 2 as standard serial port. Supports IRD mode. Supports SHARP ASK-IR protocol with maximum baud rate up to 57600bps.
• Onboard Parallel Port	<i>378/IRQ7,</i> <i>278/IRQ5,</i> <i>3BC/IRQ7</i>	Defines onboard parallel port address and IRQ channel.
• Parallel Port Mode	<i>Disabled</i> <i>SPP</i> <i>EPP</i> <i>ECP,</i> <i>ECP+EPP</i>	Onboard parallel port is disabled. Defines the parallel port mode as Standard Parallel Port (SPP), Enhanced Parallel Port (EPP), or Extended Capabilities Port (ECP).
• Onboard Legacy Audio	<i>Enabled</i>	Enables onboard legacy audio.
• Sound Blaster	<i>Disabled</i>	Disables onboard legacy audio.
• SB I/O Base Address	<i>Enabled</i>	Enables Sound Blaster.
• SB I/O Base Address	<i>Disabled</i>	Disables Sound Blaster.
• SB IRQ Select	<i>220H/240H</i> <i>260H/280H</i>	Defines SB I/O Base Address.
• SB IRQ Select	<i>IRQ5~10</i>	Selects SB IRQ.
• SB DMA Select	<i>DMA0-DMA3</i>	Selects SB DMA .
• MPU-401	<i>Enabled</i>	Enables MPU-401
• MPU-401	<i>Disabled</i>	Disables MPU-401
• MPU-401 I/O Address	<i>300/303H~</i> <i>330-333H</i>	Defines MPU-401 I/O address.
• Game port (200-207H)	<i>Enabled</i>	Enables game port.
• Game port (200-207H)	<i>Disabled</i>	Disables game port.





Power Management Setup



Figure-6 Power Management Setup Menu

• ACPI function	<i>Enabled</i> <i>Disabled</i>	Validates ACPI function. Invalidates ACPI function.
• Power Management	<i>User Define</i>	Users can configure their own Power Management Timer.
	<i>Min Saving</i>	Pre - defined timer values are used. All timers are in their MAX values.
	<i>Max Saving</i>	Pre - defined timer values are used. All timers are in their MIN values.
• ACPI Suspend Type	<i>S1</i> <i>S3</i>	Selects the suspend type.
• PM Control by APM	<i>NO</i>	System BIOS will ignore APM when Power Management is enabled.
	<i>Yes</i>	System BIOS will wait for APM's prompt before entering any PM mode e.g. Standby or Suspend.
• Video Off Option	<i>Suspend-> Off</i>	Screen blanks after the system enters either standby mode or suspend mode.
	<i>All Modes -> Off</i>	Screen blanks after the system enters all modes.
	<i>Always On</i>	Screen is always on.
• Video Off Method	<i>Blank Screen</i>	The system BIOS will only blank off the screen when disabling video.
	<i>V / H SYNC + Blank</i>	In addition to Blank Screen, BIOS will also turn off the V-SYNC & H - SYNC signals from VGA cards to monitor.
	<i>DPMS</i>	This function is enabled only for the VGA card supporting DPMS.





• Modem Use IRQ	<i>3,5,7,9,10,11</i>	Special Wake-up event for Modem.
• Soft-off by PWRBTN	<i>NA</i>	
	<i>Instant-off</i>	The system will power off immediately once the power button is pressed.
	<i>Delay 4 Sec</i>	The system will not power off until the power button has been pressed continuously for more than 4 seconds.
• Wake Up Events	<i>Press Enter</i>	sets the following items.
• VGA	<i>On</i>	VGA active reloads global timer.
	<i>Off</i>	VGA active has no influence to global timer.
• LPT&COM	<i>NONE</i>	Default setting is recommended.
	<i>LPT</i>	
	<i>COM</i>	
	<i>LPT/COM</i>	
• HDD&FDD	<i>ON</i>	Default setting is recommended.
	<i>OFF</i>	
• PCI Master	<i>ON</i>	Default setting is recommended.
	<i>OFF</i>	
• PowerOnby PCI Card	<i>Disable</i>	Disables power-on by PCI card.
	<i>Enable</i>	Enables power-on by PCI card.
• WakeUp On LAN/Ring	<i>Enabled</i>	Allows the system to be powered on when a ring indicator signal comes up to UART1 or UART2 from an external modem or comes up to WOM header from an internal modem card, or when a remote wake up signal comes up to the WOL header from LAN adapter.
	<i>Disabled</i>	Does not allow wake up on LAN or wake up from internal/external modem.
• RTCAlarm Resume	<i>Enabled</i>	RTC alarm can be used to generate a wake event to power up the system which is in power-off status. You can set any date or any time to power up the system.
	<i>Disabled</i>	RTC has no alarm function.
• IRQs Activity Monitoring	<i>Press Enter</i>	Reloads global timer.





PnP/PCI Configurations Setup



Figure-7 PnP/PCI Configurations Setup Menu

The following indicates the options for each item and describes their meaning.

<u>Item</u>	<u>Option</u>	<u>Description</u>
• PNPOS Installed	Yes No	Device resources assigned by PnP OS. Device resources assigned by BIOS.
• Reset Configuration Data	Enabled <i>Enabled</i>	The system BIOS will reset configuration data once then automatically set this item as disabled.
• Resources Controlled By	Manual <i>Manual</i>	Disables the configuration data function. Assigns the system resources (IRQ and DMA) manually .
• PCI/VGA Palette Snoop	Enabled <i>Enabled</i>	Enables PCI/VGA Palette Snoop. Disables PCI/VGA Palette Snoop.
• AssignIRQ For VGA	Enabled <i>Enabled</i>	Assigns the needed IRQ for the VGA card. Does not assign an IRQ for the VGA card, in order to release the IRQ.
• AssignIRQ For USB	Enabled <i>Disabled</i>	Assigns an IRQ for USB. If an USB device is used enables this item. Does not assign an IRQ for USB.





PC Health Status

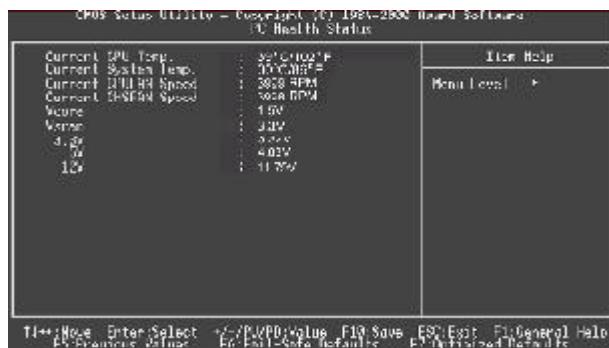


Figure-8 PC Health Status Menu

The following describes the meaning of each item.

<u>Item</u>	<u>Current Data Shown</u>	<u>Description</u>
• Current CPU Temp.	39°C/102°F	Temperature of the CPU core.
• Current System Temp.	30°C/86°F	Temperature inside the chassis.
Current CPUFAN Speed	3999RPM	RPM(Revolution Per Minute) speed of fan connected to the fan header CPUFAN/CHSFAN. Fan speed value is based on an assumption that tachometer signal is two pulses per revolution; In other cases, you should regard it relatively.
Current CHSFAN Speed	3998RPM	
• Vcore	1.5V	Displays current Voltage values including all significant voltages of the mainboard. Vcore Voltage is the CPU core voltage from the on board switching power supply. Vsram is the Northbridge voltage from the onboard switching power supply. 3.3V, 5V and 12V are voltages from the ATX power supply.
Vsram	3.3V	
3.3V	3.32V	
5V	4.83V	
12V	11.79V	





Frequency/Voltage Control



Figure-9 Frequency/Voltage Control Menu

The following indicates the options for each item and describes their meaning.

<u>Item</u>	<u>Option</u>	<u>Description</u>
• DRAMClock	<i>Host CLK</i>	DRAM frequency is the same as CPU FSB.
	<i>HCLK+33M</i>	DRAM frequency is faster than CPU FSB by 33MHz.
• Auto Detect DIMM/ PCI Clk	<i>Enabled</i>	Closes the CLK signal if no PCI or DIMM plug in.
	<i>Disabled</i>	
• CPUHost Clock (CPU/PCI)	<i>Default</i>	Default setting is recommended.
	<i>100/33Mhz(Spd on)</i>	Spd on means Spread Spectrum.
	<i>100/33Mhz(Spd off)</i>	
	<i>110/33Mhz(Spd off)</i>	
	<i>115/38Mhz(Spd off)</i>	
	<i>133/33Mhz(Spd on)</i>	
	<i>133/33Mhz(Spd off)</i>	





Set Supervisor/ User Password

When this function is selected, the following message appears at the center of the screen to assist you in creating a password.

ENTER PASSWORD

Type the password, up to eight characters, and press <Enter>. The password typed now will clear any previously entered password from CMOS memory. You will be asked to confirm the password. Type the password again and press <Enter>. You may also press <Esc> to abort the selection.

To disable password, just press <Enter> when you are prompted to enter password. A message will confirm the password being disabled. Once the password is disabled, the system will boot and you can enter BIOS Setup freely.

PASSWORD DISABLED

If you have selected “**System**” in “Security Option” of “BIOS Features Setup” menu, you will be prompted for the password every time the system reboots or any time you try to enter BIOS Setup.

If you have selected “**Setup**” at “Security Option” from “BIOS Features Setup” menu, you will be prompted for the password only when you enter BIOS Setup.

Supervisor Password has higher priority than User Password. You can use Supervisor Password when booting the system or entering “CMOS Setup” to modify all settings. Also you can use User Password when booting the system or entering “CMOS Setup” but can not modify any setting if Supervisor Password is enabled.

Boot with BIOS defaults

If you have made all the changes to CMOS values and the system can not boot with the CMOS values selected in setup, clear CMOS after power-down, then power on again. System will boot with BIOS default settings.



BIOSDescription

-- This page is intentionally left blank --



Manual for KinetiZ 7A



Appendix A

QDI Driver CD 2000

A QDI Driver CD 2000 is supplied with this mainboard. Insert CD 2000 that came with your mainboard into your CD-ROM drive to bring up the screen, click the options to install. The contents contained in it are showed as below:

1. Express Install

It's recommended for most users that program will be installed with the most common options.

A. Chipset Driver B. MR AC 97 Audio Driver

2 Chipset Driver

It's recommended for advanced users that you may choose the options you want to install chipset driver

ViA Chipset Drivers included in the directory \ChipDrv\Via .

3 OnBoard Device Driver

It's recommended for advanced users that you may choose the options you want to install Audio driver

For Windows 98, click this option you can install the drivers for your Onboard sound.
For Windows 2000, system will detect the sound device and install the drivers automatically.

2. Accessory

The softwares contained in this directory are:

A. DirectX 7.0 B. QDI ManageEasy
C. PC-cillin

3. Browse CD

You could read all the contents contained in this CD, including Utility and Documents.

The files included in **Utility** are:

A. Awdflash.exe B. Lf.exe

The files included in **Documents** are:

A. Adobe Acrobat Reader V3.0 - Ar32e301.exe
B. French Manual - AD5 FR.doc, ect.

**PC-cillin 98**

New viruses are appearing frequently; the chance of your PC being infected increases; antivirus softwares are becoming a must. PC-cillin 98 offers you full-time active virus protection as well as manual scans, plus virus clean capability. Keeping up to date on the latest threats and updating significant files are crucial in keeping antivirus software effective. PC-cillin 98 provides Free Virus Pattern File Updates from the Trend Micro Website:

<http://www.trend.com/download/pattern.htm> or
<http://www.antivirus.com/download/pattern.htm>.

QDI ManageEasy V2.0

It is well known that guaranteeing the computer's security and reliability is essential. Especially today, effectively managing and monitoring the computer's hardware is even more important; because processing and exchanging critical data through computer and network are happening everyday.

Moving with the computer's development, the system of the computer will become more and more complex; at the same time, the control computer's hardware will be strengthened. Today, it is possible to monitor and manage your complex hardware from Windows 9X and Windows NT. QDI ManageEasy is a system tool, a bridge between the complex hardware and OS, used to access hardware status and to execute control functions. It supports stronger functions for Windows 9X and Windows NT. These functions enable you to view more than one hundred of the basic information about the system and monitor some key reference data concerning computer health in real time. QDI ManageEasy also helps you to use remote access and control computers in your local area network. With QDI ManageEasy, you can improve your management level.





Appendix B. Boot Logo

When you power on or reset your system, the picture shown below will be displayed on the screen.



If you press <Esc>, it switches to the booting message screen. Otherwise, it enters operating system directly. You can use “**cblogo.exe**” (included on the QDI Mainboard Utility CD) to replace it by any other logo which you prefer. Regarding the method of using **cblogo.exe** utility, please refer to its online help. If you don't prefer the logo displayed on the screen during boot up, set the “Show Bootup Logo” option as Disabled in the “BIOS FEATURES SETUP” section of the BIOS.

*** We reserve the right of modifying the default full-logo of QDI without further notification.**





-- This page is intentionally left blank --



Manual for KinetiZ 7A



RecoveryEasy

Introduction:

RecoveryEasy™, the latest QDI innovation, is able to protect the system from being destroyed, by creating a so-called “mirror partition” for a current hard disk partition and backuping all the data to the mirror area. This ideal utility provides disk partition, disk data backup/recovery, CMOS settings backup/recovery and multi-boot functions. RecoveryEasy is also able to prevent the system from being attacked by different kinds of boot virus or other severe virus such as CIH. In case the system is ruined either by mistake or virus, the system can be recovered from the mirror partition. It applies the build-in BIOS technology that does not occupy either the hard disk space or the system memory. It's the best choice for both corporations and PC users.

Operation Process:

There are two hotkeys – Ctrl+Bksp and F12 for RecoveryEasy to enter “Partition” and “Recovery” user interfaces accordingly during BIOS booting up. If two or more hard disks are installed, use F5 key to choose the hard disk.

1. Partition Interface (see figure-1)

Users can create and delete partitions/mirror partitions, activate partitions, and uninstall RecoveryEasy in Partition User Interface.



figure e-1 Partition Interface

1.0 Install RecoveryEasy for the first time

- The utility checks the previous disk partition at first, and displays the status of the first four partitions. If there are more than four disk partitions, users will be asked to delete the redundant disk partitions, since only four partitions that can be activated are allowed to exist. However, if there're only four or fewer partitions, users can follow the system prompt and choose to install RecoveryEasy based on the previous disk partitions. In this way, the original extension partitions will be changed to normal ones, and probably the sequence of the partitions will be changed also, but the contents contained in each partition will remain the same.





RecoveryEasy

- b. If choosing to install RecoveryEasy on an absolutely clear disk, the utility will delete all the previous partitions.
- c. The password is set as default setting “ qdqdqdi” after installing RecoveryEasy.

1.1 CREATE PAR

Function : Creates a new partition.

Limitation: When no disk space remains or 4 partitions already exist, this button is disabled.

Steps : After pressing the “CREATE PAR” button.

- a. The system will prompt whether users want to create a mirror partition for it or not.
- b. If answering “Y”, input the new partition size in Megabyte. Notice that the maximum partition size that can be assigned is half of the left disk space, which is also displayed in the status line. Another half is for the mirror partition. If answering “N”, the whole disk space left can be assigned. See figure-2.



figure-2 Create Partition

Note:

- a. The system will prompt “Insert system floppy, then reset” when the first partition on the first hard disk is created.
- b. After using DOS6.xx boot disk to format C partition, the system should be reset in order to access the partition.
- c. In Windows system 1,048,576 bytes equal 1 Megabyte, while in RecoveryEasy 1,000,000 bytes equal 1 Megabyte, therefore a smaller size will be displayed in Windows system compared with the size displayed in RecoveryEasy.

1.2 DELETE PAR

Function : Deletes the last partition and its mirror partition.

Limitation: When no partition exists, this button is disabled.

Steps : After choosing this function, only the final partition can be deleted in order to keep the continuous disk space. If the warning message is confirmed, the partition will be deleted. By pressing “N” or “ESC” key, the system quits.



Manual for KinetiZ 7A



1.3 ACTIVE PAR

- Function** : Implements multi-boot function by activating one of the partitions.
Limitation : When no partition exists, this button is disabled.
Steps : If there're two or more partitions, choose one of them by pressing F5 key.
Note : After setting active partition, a letter "A" will be shown in front of this partition.

1.4 CREATE MIR

- Function** : Adds mirror partition for the disk partition that has no mirror.
Limitation : This function should be performed by order, for example, from partition 1 to 4. If no disk space remains or the last partition has its mirror partition already, this button is disabled.
Steps : After pressing the "CREATE MIR" button, use F5 key to choose the partition to create mirror. The partition of which the size is bigger than the left disk space will be ignored.

1.5 DELETE MIR

- Function** : Deletes the mirror partition.
Limitation : If there is no mirror partition, this button is disabled. This function should be performed in reverse order, for example, from partition 4 to 1.
Steps : After pressing the "DELETE MIR" button, only the final mirror partition can be deleted in order to keep the continuous disk space. If the warning message is confirmed, the mirror partition will be deleted. By pressing "N" or "ESC" key, the system quits.

1.6 UNINST SFW

- Function** : Uninstall RecoveryEasy.
Limitation : None.
Steps : After pressing the "UNINST SFW" button and the warning message is confirmed, RecoveryEasy will be uninstalled. By answering "N", the system quits.
Note : After RecoveryEasy is uninstalled, all the mirror areas have been disconnected with the relate partitions. If no partition is deleted or changed in size, or no other partition is created, users have chance to "Recover existing RecoveryEasy settings" when next time entering RecoveryEasy partition interface, meanwhile the password will be set as default setting "qdqdi".

1.7 OTHERS

- F12** : Switches to Recovery User Interface.
ESC : Exits from the Partition User Interface. If users made some mistakes, for example, wrongly delete a partition, do not press the "ESC" key, press the reset button on your system at once, in this way users can save their system.



RecoveryEasy

F5:

- a. When two or more than two hard disks are installed on the system, use F5 key to choose the hard disk. Every time users use F5 key to switch the hard disk, the operation result for the previous hard disk is saved. When processing a certain hard disk, F5 key can be used to choose the partition.
- b. In addition, when two or more than two hard disks are installed, the sign of partitions will be changed from C, D, E, F to 1, 2, 3, 4 accordingly.

2. Recovery Interface (see figure-3)

Users can backup the partition to its mirror area, and recover the partition from its mirror area from Recovery User Interface. This interface also provides users with CMOS settings backup or recovery, and changing password functions.



figure-3 Recovery User Interface

2.1 BACKUP PAR

Function : Backups the content of the partition to its mirror area.

Limitation : If no mirror partition exists, this button is disabled.

Steps:

- a. Use F5 key to choose the partition with mirror area existed.
- b. If the partition chosen has been backed up before, a warning message will be shown, and the time when last backup was done will be displayed in the status line. After confirming the warning message, the system performs the backup. By pressing "N" or "ESC" key, the system quits.

2.2 RE-CVR PAR

Function : Recovers the content from the mirror area to the relate partition.

Limitation : If users didn't backup any partitions before, this button is disabled.

Steps:

- a. Use F5 key to choose the backed up partition.
- b. The time when the latest backup was done will be displayed in the status line. After confirming the warning message, the system performs the content recovery. By pressing "N" or "ESC" key, the system quits.



Manual for KinetiZ 7A

**Note:**

- a. During the process of partition backup or recovery, a gauge will be shown as below, the backup or recovery speed is about 4-5Mbyte/s. See figure-4.



figure-4 Backup Partition

- b. If a disk I/O error occurs during the process of partition backup or recovery, this means there's physical damage on the hard disk, however users can ignore it and continue the process.

2.3 ATTRIB PAR

Function : Allows users to modify the properties of the partition (eg. FAT16 -> FAT32) after entering OS.

Limitation : None.

Steps : After pressing this button, turn on/off the switch.

Note:

- a. The switch resets to the default setting "disable" every time the system reboots.
 b. In order to implement this function, users need to enable the switch when installing the OS or modifying the partition properties. Please note: Do not create or delete partitions or change the partition size when modifying the partition properties.

2.4 BACKUP CMS

Function : Backups all CMOS settings.

Limitation : None.

Steps : After choosing this function, the current CMOS settings will be saved.

2.5 RE-CVR CMS

Function : Recovers all CMOS settings.

Limitation : None.

Steps : After choosing this function, the latest backup of the CMOS settings will be recovered. The system needs reboot in order to validate the new CMOS settings.

Note : If users have never backed up the CMOS settings, a wrong message will be shown after choosing this function.



RecoveryEasy

2.6 CHANGE PWD

Function : Changes the password to enter RecoveryEasy Partition or Recovery User Interface.

Limitation: None.

Steps : Follow the system prompt, input the password no more than 6 characters twice. To delete the password, follow the system prompt and press the "Enter" key twice.

Note:

- a. The password should be no more than 6 characters, only digital and alphabetic letters are valid.
- b. Once the password is enabled, users will be asked to input the password every time they try to enter the RecoveryEasy user interfaces, and up to 3 times try is permitted.

2.7 Others

Ctrl+Bksp : Switches to Partition User Interface.

ESC : Exits from the Partition User Interface.

F5 : When two or more than two hard disks are installed on the system, use F5 key to choose the hard disk. When processing a certain hard disk, F5 key can be used to choose the partition.

FAQ:

1. What does RecoveryEasy do?

RecoveryEasy creates a so-called "mirror partition" with same size for the hard disk partition on the same hard disk, and then completely backups all the data sector by sector to the mirror area. This mirror partition is reserved to OS. When the OS ruins either by mistakes or virus, users can recover the partition from its mirror.

2. Does RecoveryEasy occupy the system resources?

Although some hard disk data protection applications can automatically protect the disk data in runtime, it lowers the system performance. Unlike these applications, RecoveryEasy need users to backup or restore data manually when needed, but it DOES NOT lower the system performance when the system is running. It does not occupy either hard disk space or system memory, additional floppy disk or ISA/PCI cards are unnecessary.

3. RecoveryEasy utilizes Build-in BIOS skill, what is build-in BIOS?

RecoveryEasy build-in BIOS means all functions of RecoveryEasy including creating partition, backuping and restoring partition are built in BIOS. Users just need to download the latest BIOS from our Website (<http://www.qdigrp.com>) when wanting to upgrade (It's free!).



Manual for KinetiZ 7A

**4. Are there any hard disk limitations of RecoveryEasy?**

RecoveryEasy supports all kinds of current IDE hard disks and has no limitation on the hard disk capacity. RecoveryEasy can not provide its function for some special hard disk types such as SCSI, but it will not affect their usage.

5. Are there any OS limitations of RecoveryEasy?

RecoveryEasy supports current operating systems such as DOS, Windows 95/98. However in Windows NT, Windows 2000, Unix and OS2 systems, users should notice that the disk tools bundled in the OS could change the mirror partition. On the other hand, since users can create partition with RecoveryEasy, it is unnecessary to use other disk tools.

6. Why does the system halt when HDD access mode is changed (eg. LBA->LARGE)?

This is a way to protect the system from the errors of data accessing caused by changing HDD access mode. When RecoveryEasy detects such things, the system will be locked, users could reboot the system and set the HDD access mode as the original one in BIOS SETUP.

7. Why does the remainder size plus partitions size not match the total size shown in RecoveryEasy sometimes?

When the location of partitions is not continuous, the above problem exists.

8. Are there any other disk partition tools that can modify the partition table made by RecoveryEasy?

RecoveryEasy provides a write-protect function, so the disk tools such as Fdisk, Partition Magic, BootMenu, SmartDisk and BootStar can not modify the partition table created by RecoveryEasy. Some of the applications even terminate during operation. However the disk tools bundled in the OS such as Windows NT, Windows 2000, Unix and OS2 could change the mirror partition.

9. Why does it happen that a prompt “*installation can not continue*” pops up when installing Windows98 or a yellow exclamation mark shown beside IDE device in system properties?

During Windows 98 installation, the installation program will write to MBR (Master Boot Record) which is protected by RecoveryEasy, therefore the installation will be terminated. To avoid this problem, a “ATTRIB PAR” button is provided in Recovery User Interface. Enable this switch before installing Windows 98, then the installation will be successfully completed. In order to remove the yellow question mark before IDE devices in Device Manager, enable this switch once more after system reboot.

10. Why does the converting of FAT16->FAT32 in PQ Magic go wrong?

MBR will be accessed when converting FAT16 to FAT32 with PQ Magic, which is protected by RecoveryEasy, therefore the conversion will be invalidate. Enabling the “ATTRIB PAR” switch from Recovery User Interface



before converting can avoid this problem. It's the same situation as "FAT32 Converter" provided in Windows98.

11. What if partitions be wrongly deleted in RecoveryEasy?

If users delete a partition in RecoveryEasy by mistake, they can save it by pressing the Reset button on their system at once. Do not press the "ESC" key to quit RecoveryEasy, this will save the change. Do not try to create the partition again, since creating partition will clear all the content of the partition.

12. What is multi-boot?

RecoveryEasy can implement the multi-boot function by activating different partition. For example on the hard disk, partition C contains DOS, partition D contains Windows 95 version, partition E contains Windows 98 version, when activating partition C in RecoveryEasy, the system enters DOS, when activating partition E, the system enters Windows 98 version. At the same time, the sequence of the partitions is adjusted accordingly, partition E becomes C:, partition C becomes D: and partition D becomes E:. This function is the same as that of fdisk.exe, but the system needs reboot in order to make the change validate for fdisk.exe.

13. What if computer accidentally power off when backuping (recovering)?

The partition should be completely backuped or recovered. If the computer accidentally powers off, the partition should be backuped or recovered once again.

14. What if users lose the password?

To make sure the security, the password is saved in the hard disk. **It's very important for users to remember the password.** If forgetting the password, contact us, clearing CMOS is useless.

15. Does RecoveryEasy protect hard disk against CIH?

RecoveryEasy can strongly protect the hard disk from boot-virus, as well as the attack of CIH. If the system is attacked by CIH, RecoveryEasy will automatically recover the MBR and each partition boot record before system boots up, and try to recover the FAT. In this way the system can basically boot up, then users can use some anti-virus application to kill the virus. However this depends on how CIH virus affects the system. CIH normally outbreaks on 26th every month, if the system cannot boot up that day, power off the computer instantly, and use the second safe way to recover the system, that is, recover the partition from its mirror area from Recovery User Interface. Remember to create a mirror partition and backup before virus attacks the system.



Item Checklist

Completely check your package. If you discover damaged or missing items, contact your retailer.

- KinetiZ 7A mainboard
- QDI Driver CD 2000
- I/O shield
- 1 IDE ribbon cable
- 1 floppy ribbon cable
- 1 10-pin ribbon cable with bracket for USB3 and USB4(manufacturing option)
- User's manual

Notice

The information in this document is subject to change in order to improve reliability, design, or function without prior notice and does not represent a commitment on the part of this company. In no event will we be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or the possibility of such damages.

All trademarks are the property of their respective owners.

If you need any further information, please visit our web-site: "www.qdigrp.com".

Board Layout of KinetiZ 7A V1.0

**P/N: 430-01020-001-00
Manual for KinetiZ 7A Ver 1.0**