


MIRO COMPUTER PRODUCTS, INC. MIROCONNECT 34 WAVE

Card Type	Fax, Modem (asynchronous), Sound, Voice
Chip Set	Mwave MDSP-2780
I/O Options	Audio in, Audio out, CD-ROM audio (2), CD-ROM interface, Game/MIDI port, Microphone, Voice
Maximum DRAM	N/A
Maximum Modem Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	16-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103/212A
Fax Modulation Protocol	ITU-T V.21, V.22, V.22bis, V.32, V.32bis, V.34
Error Correction/Compression	ITU-T V.17, V.27ter, V.29 MNP5, V.42bis

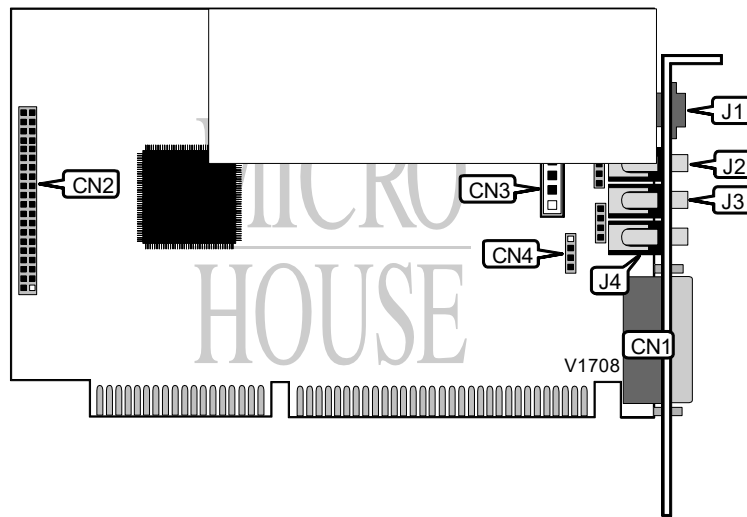

CONNECTIONS			
Purpose	Label	Purpose	Label
Game/MIDI port	CN1	Line out - RJ-11	J1
IDE CD-ROM interface	CN2	Microphone in	J2
Mistumi CD - audio in	CN3	Audio in	J3
Sony/IDE CD - audio in	CN4	Audio out	J4

MISCELLANEOUS TECHNICAL NOTES
Note: Modem commands are not used directly, see the software program that controls the modem.