


BOCA RESEARCH, INC.

I/O 450

Card Type	Parallel/Serial card
Chip Set	AT-type GM 82C 455
Maximum Onboard Memory	None
I/O Options	Parallel port (2), serial port (2)
Data Bus	8-bit ISA
Floppy drives supported	None

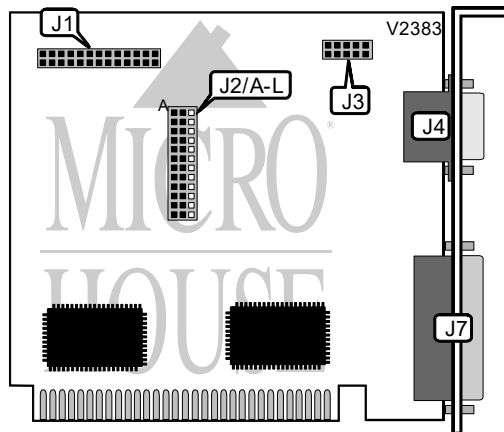

CONNECTIONS			
Function	Label	Function	Label
26-pin Parallel port 2	J1	9-pin serial port 1	J4
10-pin serial port 2	J3	25-pin parallel port 1	J7

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Serial port 1 enabled	J2/A	Pins 2 & 3 closed	
Serial port 1 disabled	J2/A	Pins 1 & 2 closed	
Serial port 2 enabled	J2/B	Pins 2 & 3 closed	
Serial port 2 disabled	J2/B	Pins 1 & 2 closed	
Parallel port 1 enabled	J2/C	Pins 2 & 3 closed	
Parallel port 1 disabled	J2/C	Pins 1 & 2 closed	
Parallel port 2 enabled	J2/D	Pins 2 & 3 closed	
Parallel port 2 disabled	J2/D	Pins 1 & 2 closed	

SERIAL PORT 1 ADDRESS SELECTION	
Setting	J2/E
COM1 (3F8h)	Pins 2 & 3 closed
COM3 (3E8h)	Pins 1 & 2 closed

SERIAL PORT 2 ADDRESS SELECTION	
Setting	J2/F
COM2 (2F8h)	Pins 2 & 3 closed
COM4 (2E8h)	Pins 1 & 2 closed

Continued on next page. . .

. . . continued from previous page

PARALLEL PORT 1 INTERRUPT SELECTION	
IRQ	J2/G
5	Pins 2 & 3 closed
7	Pins 1 & 2 closed

PARALLEL PORT 2 INTERRUPT SELECTION	
IRQ	J2/H
5	Pins 2 & 3 closed
7	Pins 1 & 2 closed

SERIAL PORT 1 INTERRUPT SELECTION				
IRQ	J2/I	J2/J	J2/K	J2/L
3	Pins 2 & 3 closed	Open	Open	Open
4	Open	Pins 2 & 3 closed	Open	Open
5	Open	Open	Pins 2 & 3 closed	Open
9	Open	Open	Open	Pins 2 & 3 closed

SERIAL PORT 2 INTERRUPT SELECTION				
IRQ	J2/I	J2/J	J2/K	J2/L
3	Pins 1 & 2 closed	Open	Open	Open
4	Open	Pins 1 & 2 closed	Open	Open
5	Open	Open	Pins 1 & 2 closed	Open
9	Open	Open	Open	Pins 1 & 2 closed