


# TWINHEAD INTERNATIONAL CORPORATION

## CT-6040S

|                              |                          |
|------------------------------|--------------------------|
| Card Type                    | Video, printer card      |
| Video Chip Set               | Unidentified             |
| Maximum Video Memory         | Unidentified             |
| Video Types Supported        | Monochrome               |
| Highest Resolution Supported | 720 x 348                |
| I/O Options                  | Printer port, video port |
| Data Bus                     | 8-bit ISA                |

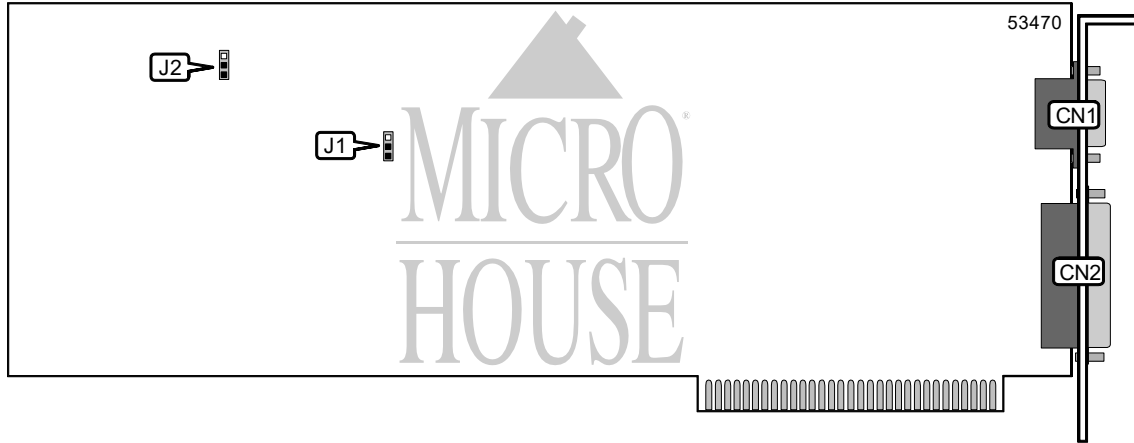

| CONNECTIONS |       |              |       |
|-------------|-------|--------------|-------|
| Function    | Label | Function     | Label |
| Video port  | CN1   | Printer port | CN2   |

| USER CONFIGURABLE SETTINGS         |       |                   |  |
|------------------------------------|-------|-------------------|--|
| Function                           | Label | Position          |  |
| Graphic mode (Hercules V1) enabled | J1    | Pins 1 & 2 closed |  |
| Graphic mode (Hercules V2) enabled | J1    | Pins 2 & 3 closed |  |
| Printer enabled                    | J2    | Pins 1 & 2 closed |  |
| Printer disabled                   | J2    | Pins 2 & 3 closed |  |

| MISCELLANEOUS TECHNICAL NOTES  |
|--|
| If this board is to be installed into an IBM PC, then on SW1 on the mainboard, switch positions 5 & 6 must be set to the off position. |