


CREATIVE LABS, INC. SOUNDBLASTER AWE32 (CT2760 REV. 3)

Card Type Sound card
Chip Set Creative Technology
Maximum Onboard Memory Unidentified
I/O Options CD-ROM interfaces (3), microphone connector, line in connector, line out connector, speaker out connector, game/MIDI port, PC internal speaker, CD-ROM audio in connector, feature connector
Data Bus 16-bit ISA

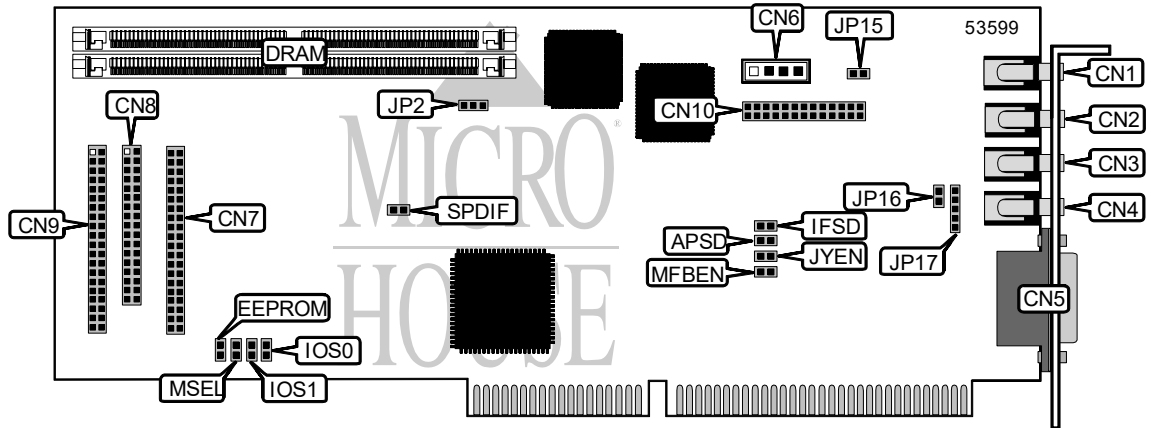

CONNECTIONS			
Function	Label	Function	Label
Line in connector	CN1	Mitsumi CD-ROM interface	CN7
Microphone connector	CN2	Sony CD-ROM interface	CN8
Line out connector	CN3	Panasonic CD-ROM interface	CN9
Speaker out connector	CN4	Feature connector	CN10
Game/MIDI port	CN5	PC internal speaker	JP15
CD-ROM audio in connector	CN6		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
EEPROM enabled	EEPRO M	Unidentified	
EEPROM disabled	EEPRO M	Unidentified	
í Factory configured – do not alter	JP16	Unidentified	
í Factory configured – do not alter	JP17	Unidentified	
í Joystick enabled	JYEN	Closed	
Joystick disabled	JYEN	Open	
í MP-401 enabled	MBFEN	Closed	
MP-401 disabled	MBFEN	Open	
í MP-401 I/O address select 330	MSEL	Closed	
MP-401 I/O address select 300	MSEL	Open	
í Factory configured – do not alter	SPDIF	Unidentified	

Continued on next page . . .

CREATIVE LABS, INC.
 SOUNDBLASTER AWE32 (CT2760 REV. 3)

... continued from previous page

DRAM CONFIGURATION

Note: Board is factory installed with 512KB memory. The maximum amount of onboard memory is unidentified.

DRAM JUMPER CONFIGURATION

Setting	JP2
Memory upgrade disabled	Pins 2 & 3 closed
Memory upgrade enabled	Pins 1 & 2 closed

AUDIO I/O ADDRESS SELECTION

Address	IOS0	IOS1
220	Closed	Closed
240	Open	Closed
260	Closed	Open
280	Open	Open

CSP CHIP SELECTION

Setting	APSD	IFSD
Enabled	Open	Open
Disabled	Closed	Closed