


PROLINK COMPUTER, INC.

P 3 8 6 S X - 2 0 H T

Processor	80386SX
Processor Speed	20MHz
Chip Set	Headland
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	330mm x 220mm
I/O Options	None
NPU Options	80387SX

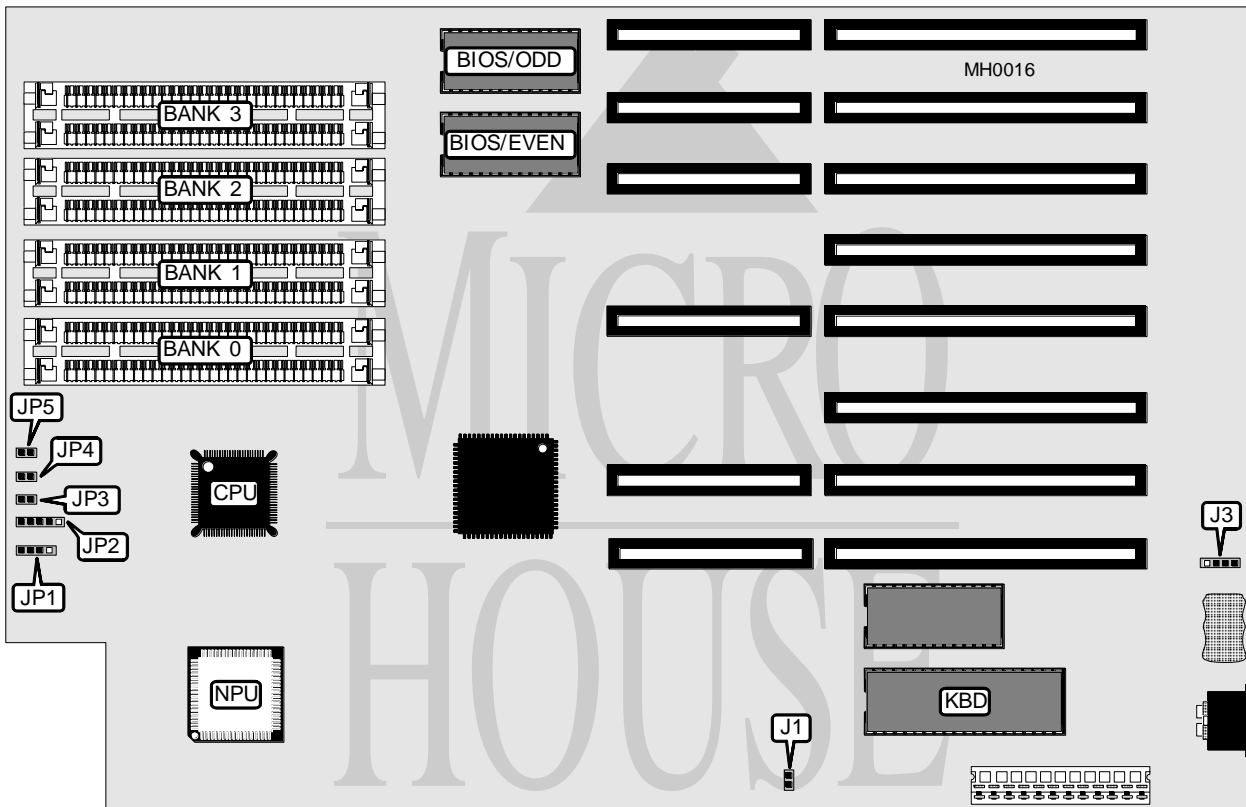

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J3	Turbo LED	JP3
Speaker	JP1	Turbo switch	JP4
Power LED & keylock	JP2	Reset switch	JP5

Continued on next page . . .

PROLINK COMPUTER, INC.
P386SX-20 HT

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J1	Open
Monitor type select monochrome	J1	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9