## **IBM CORPORATION**

## PS/2 MODEL 80 (8580-111,121,311,321)

**Processor** 80386DX **Processor Speed** 16/20/25MHz


None **Chip Set** Max. Onboard DRAM 8MB Cache None **BIOS IBM** 

**Dimensions** 355mm x 254mm

I/O Options Serial port, parallel port, pointing device connector, display connector, video adapter slot,

floppy drive interface

**NPU Options** 80387

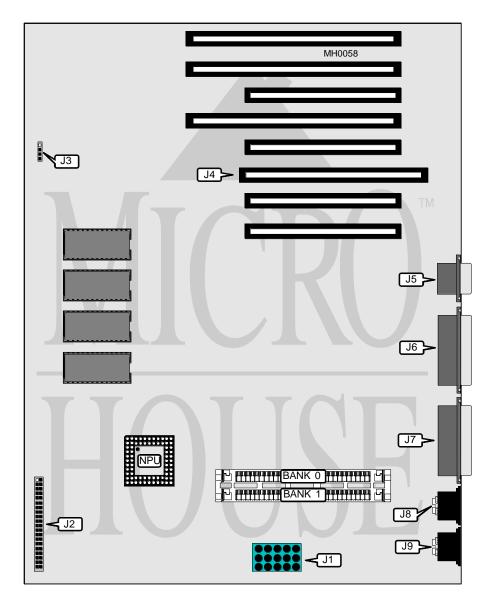

Continued on next page . . .

## **IBM CORPORATION** PS/2 MODEL 80 (8580-111,121,311,321)

. . . continued from previous page

CONNECTIONS				
Purpose	Location	Purpose	Location	
Power supply	J1	Serial port	J6	
Floppy drive interface	J2	Parallel port	J7	
Battery/speaker	J3	Pointing device	18	
Video adapter slot	J4	Keyboard	J9	
Display	J5			

	DRAM CONFIGURATION		
Size	Bank 0	Bank 1	
1MB	(1) 1M x 9	NONE	
2MB	(1) 1M x 9	(1) 1M x 9	
4MB	(1) 4M x 9	NONE	
8MB	(1) 4M x 9	(1) 4M x 9	
Note: Onboard memory does not have Banks 0 & 1 are interchangeable.	to be full in order to use memory e	xpansion cards.	