


ABC COMPUTER COMPANY, LTD. COMPACT 286 VER. 3.0

Processor 80286
Processor Speed 20MHz
Chip Set C & T
Max. Onboard DRAM 8MB
Cache None
BIOS AMI
Dimensions 330mm x 218mm
I/O Options None
NPU Options 80287

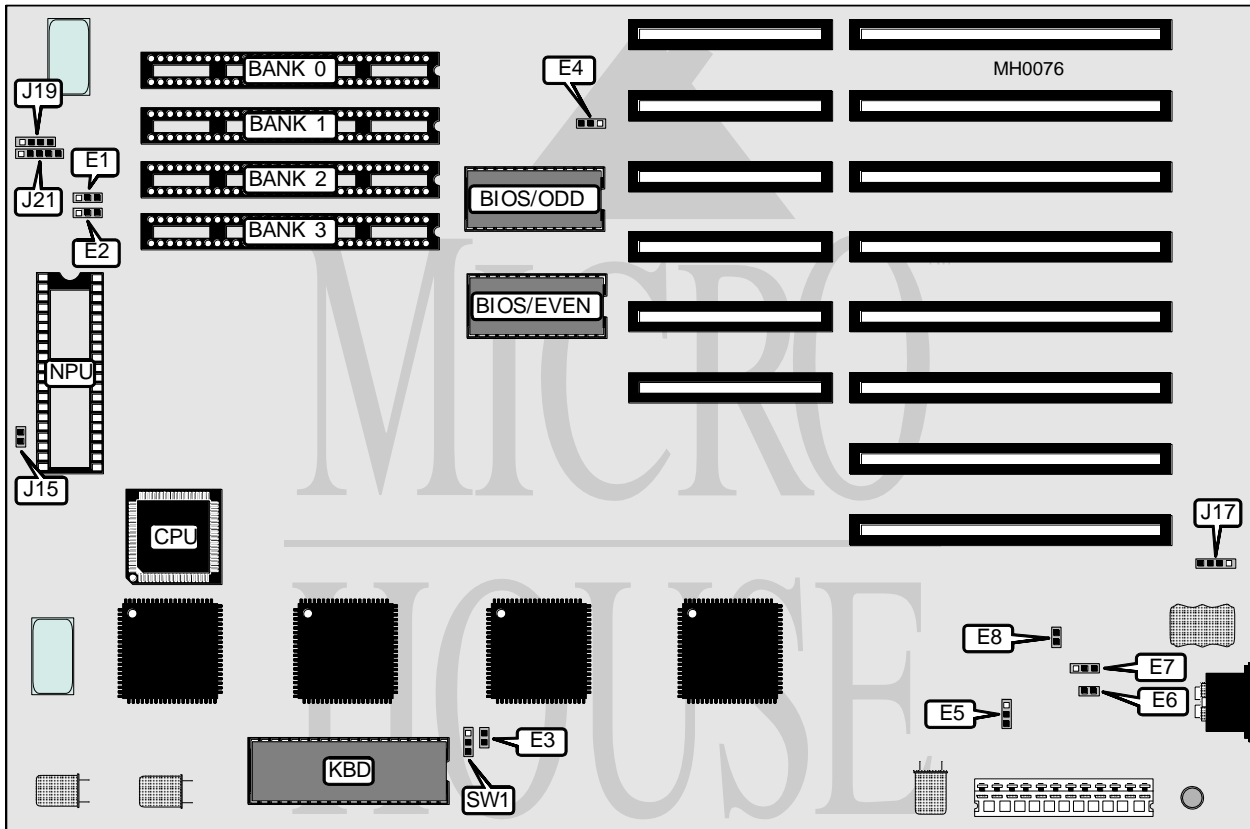

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	E3	External battery	J17
Reset switch	E6	Speaker	J19
MIPS counter	E8	Power LED & keylock	J21
Speed LED	J15		

Continued on next page . . .

ABC COMPUTER COMPANY, LTD.

COMPACT 286 VER. 3.0

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU speed select fast	E1 & E2	pins 1 & 2 closed
NPU speed select slow	E1 & E2	pins 2 & 3 closed
í BIOS type select 27128	E4	pins 1 & 2 closed
BIOS type select 27256	E4	pins 2 & 3 closed
í CMOS memory normal operation	E5	pins 2 & 3 closed
CMOS memory clear	E5	pins 1 & 2 closed
í Reset enabled through hardware and keyboard	E7	pins 2 & 3 closed
Reset enabled through hardware only	E7	pins 1 & 2 closed
í Monitor type select monochrome	SW1	Open
Monitor type select color	SW1	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
640KB	(2) 256K x 9	(2) 64K x 9	NONE	NONE
1M x 9B	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
1.64MB	(2) 256K x 9	(2) 64K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.64MB	(2) 256K x 9	(2) 64K x 9	(2) 1M x 9	(2) 1M x 9
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9