


IBM CORPORATION PS/2 MODEL 50 TYPE 2

| | |
|--------------------------|--|
| Processor | 80286 |
| Processor Speed | 10MHz |
| Chip Set | None |
| Max. Onboard DRAM | 1MB |
| Cache | None |
| BIOS | IBM |
| Dimensions | 355mm x 304mm |
| I/O Options | Serial port, parallel port, pointing device connector, MCA video card slot, video port, hard drive interface slot, floppy drive interface slot |
| NPU Options | 80287 |

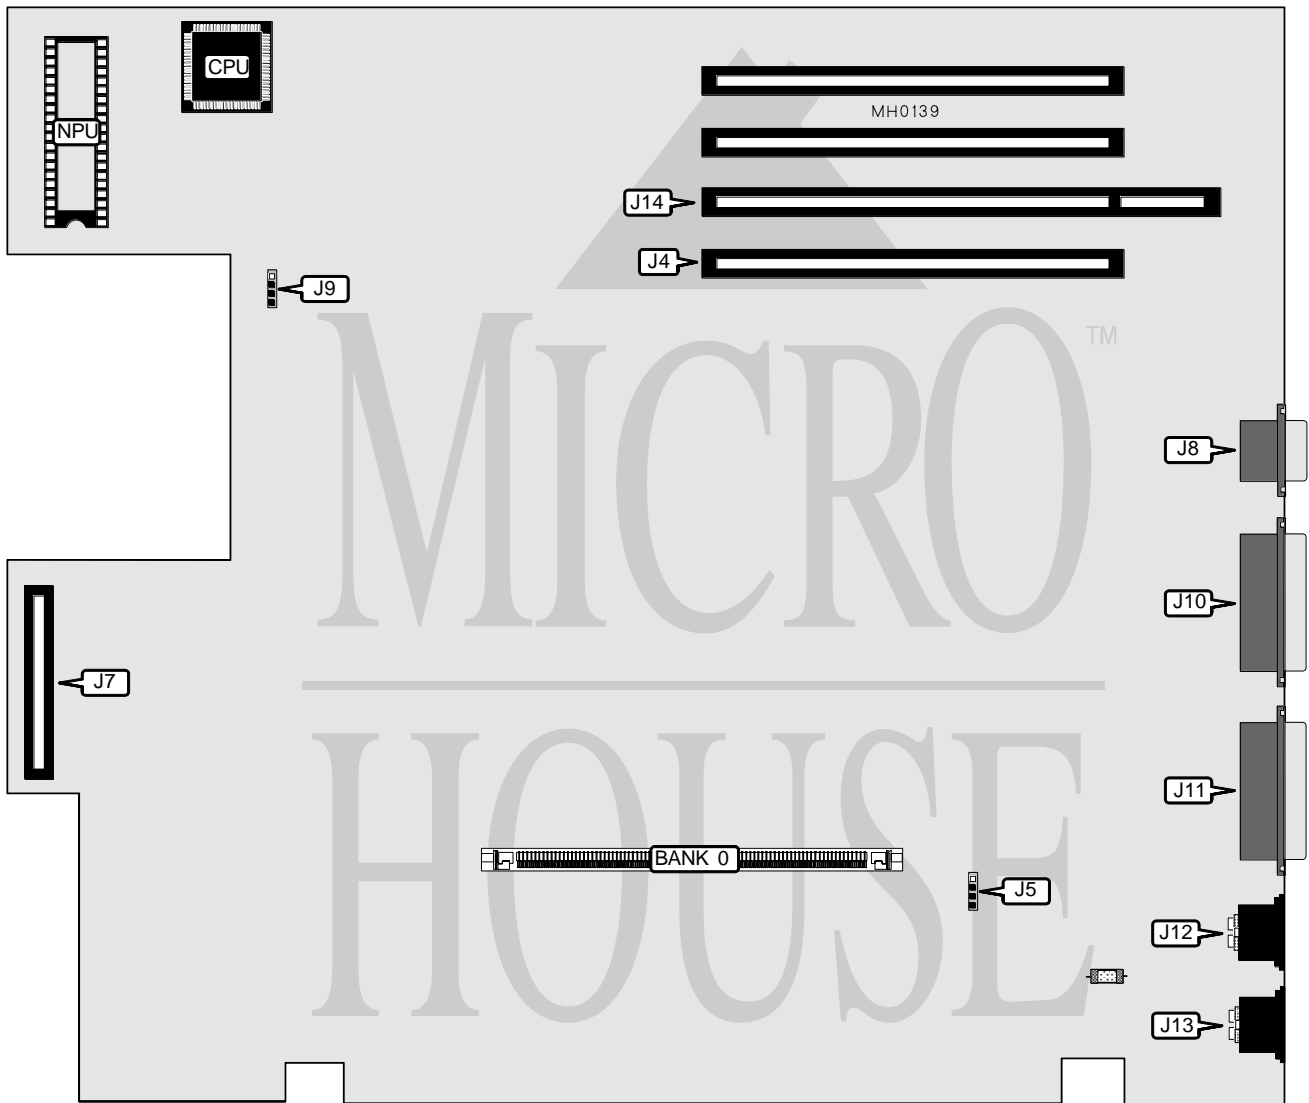

Continued on next page . . .

IBM CORPORATION

PS/2 MODEL 50 TYPE 2

... continued from previous page

| CONNECTIONS | | | |
|-----------------------------|----------|---------------------|----------|
| Purpose | Location | Purpose | Location |
| Hard drive interface slot | J4 | Serial port | J10 |
| Chassis fan power | J5 | Parallel port | J11 |
| Floppy drive interface slot | J7 | Pointing device | J12 |
| Display | J8 | Keyboard | J13 |
| Battery/speaker | J9 | MCA video card slot | J14 |

| DRAM CONFIGURATION | |
|---|-------------|
| Size | Bank 0 |
| 1MB | (1) 1M x 36 |
| Note: Onboard memory does not have to be installed in order to used memory expansion cards. | |