


IBM CORPORATION

PS/2 MODEL 70 386 16/20RS

| | |
|--------------------------|--|
| Processor | 80386DX |
| Processor Speed | 16/20MHz |
| Chip Set | IBM |
| Max. Onboard DRAM | 6MB |
| Cache | None |
| BIOS | IBM |
| Dimensions | 355mm x 240mm |
| I/O Options | Serial port, parallel port, pointing device connector, proprietary hard/floppy drive controller connector, proprietary 16-bit MCA video adapter slot, VGA port |
| NPU Options | 80387 |

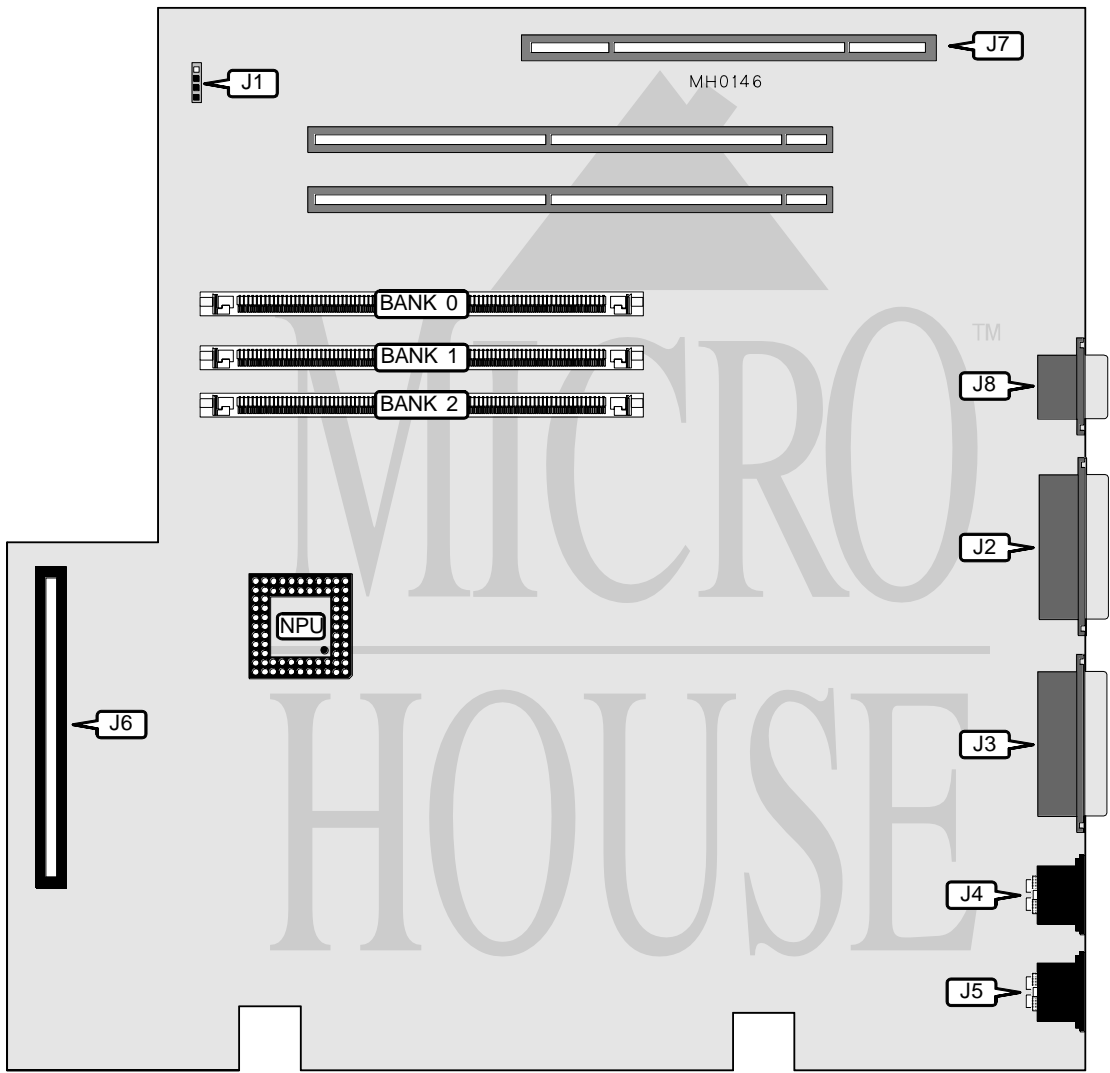

Continued on next page . . .

IBM CORPORATION

PS/2 MODEL 70 386 16/20RS

... continued from previous page

| CONNECTIONS | | | |
|-----------------|----------|--------------------|----------|
| Purpose | Location | Purpose | Location |
| Battery/speaker | J1 | Keyboard | J5 |
| Serial port | J2 | Hard/floppy drive | J6 |
| Parallel port | J3 | Video adapter slot | J7 |
| Pointing device | J4 | Display connector | J8 |

| DRAM CONFIGURATION | | | |
|--------------------|---------------|---------------|---------------|
| Size | Bank 0 | Bank 1 | Bank 2 |
| 1MB | (1) 256K x 36 | NONE | NONE |
| 2MB | (1) 256K x 36 | (1) 256K x 36 | NONE |
| 2MB | (1) 512K x 36 | NONE | NONE |
| 3MB | (1) 256K x 36 | (1) 256K x 36 | (1) 256K x 36 |
| 4MB | (1) 512K x 36 | (1) 512K x 36 | NONE |
| 5MB | (1) 256K x 36 | (1) 512K x 36 | (1) 512K x 36 |
| 6MB | (1) 512K x 36 | (1) 512K x 36 | (1) 512K x 36 |

Notes: SIMMs are a proprietary IBM design, standard 36-bit SIMMs can not be used. Onboard memory does not need to be installed in order to use memory expansion cards.