


ELITEGROUP COMPUTER SYSTEMS, INC.

386S

Processor	80386DX
Processor Speed	25/33MHz
Chip Set	SIS
Max. Onboard DRAM	16MB
Cache	64/128KB (on 32-bit external cache memory card)
BIOS	AMI
Dimensions	225mm x 330mm
I/O Options	32-bit external cache memory card
NPU Options	80387DX

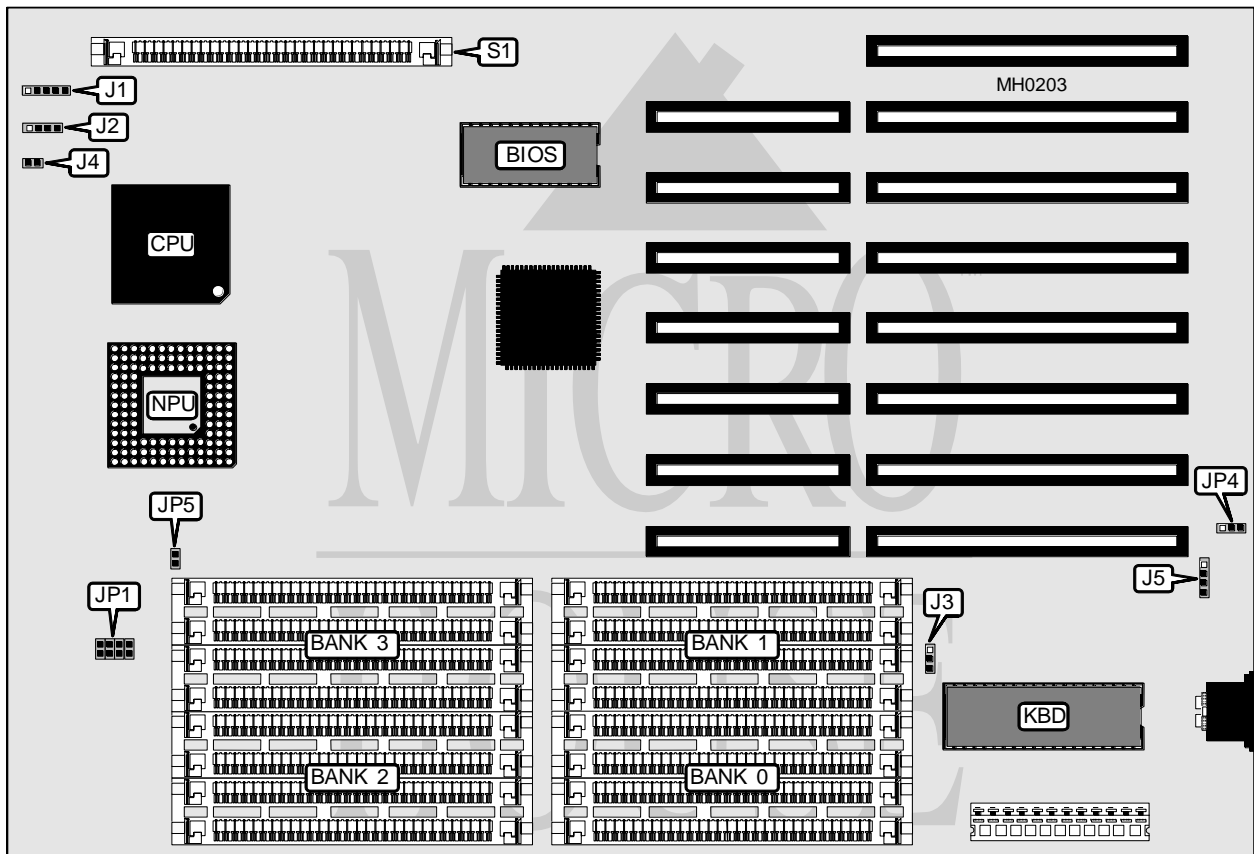

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	External battery	J5
Speaker	J2	32-bit external cache memory card	S1
Reset switch	J4		

Continued on next page . . .

ELITEGROUP COMPUTER SYSTEMS, INC.

386S

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J3	pins 1 & 2 closed
Monitor type select color	J3	pins 2 & 3 closed
í 128KB chipset cache enabled	JP1	Closed
External cache card enabled	JP1	Open
í Power good signal detect from power supply	JP4	pins 1 & 2 closed
Power good signal detect from board	JP4	pins 2 & 3 closed
í Parity check enabled	JP5	Closed
Parity check disabled	JP5	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9