


BEAVER COMPUTER CORPORATION

386SX

Processor	80386SX
Processor Speed	16/20MHz
Chip Set	TI
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI/Award
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

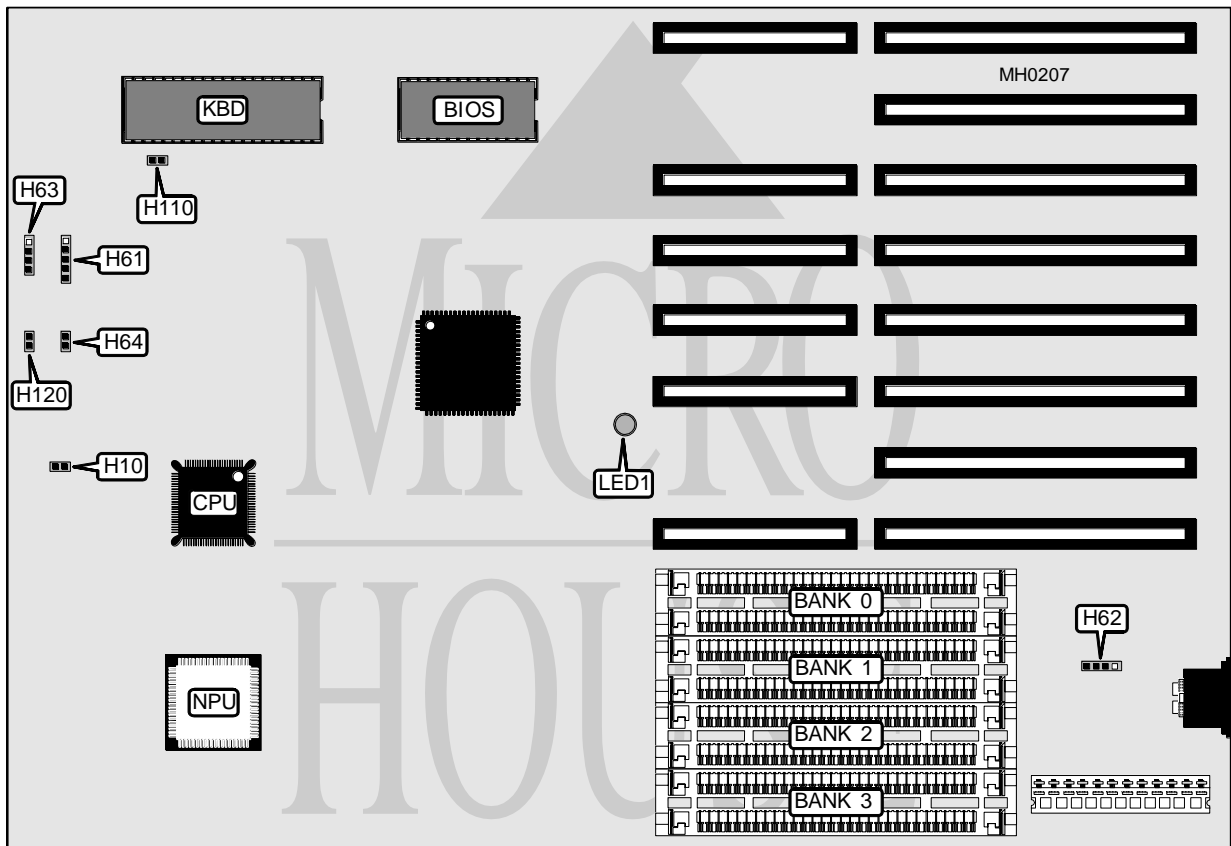

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	H61	Reset switch	H64
External battery	H62	Turbo LED	H120
Speaker	H63	On-board power LED	L1

Continued on next page . . .

BEAVER COMPUTER CORPORATION**386SX**

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Pipeline mode enabled	H10	Closed
Pipeline mode disabled	H10	Open
í Monitor type select color	H110	Closed
Monitor type select monochrome	H110	Open

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 1M x 9	(2) 256K x 9	NONE	NONE
3MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	NONE
3.5MB	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
6.5MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE	NONE	NONE
8.5MB	(2) 4M x 9	(2) 256K x 9	NONE	NONE
9MB	(2) 4M x 9	(2) 256K x 9	(2) 256K x 9	NONE
9.5MB	(2) 4M x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
10MB	(2) 4M x 9	(2) 1M x 9	NONE	NONE
10.5MB	(2) 4M x 9	(2) 1M x 9	(2) 256K x 9	NONE
11MB	(2) 4M x 9	(2) 1M x 9	(2) 256K x 9	(2) 256K x 9
12MB	(2) 4M x 9	(2) 1M x 9	(2) 1M x 9	NONE
12.5MB	(2) 4M x 9	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9
14MB	(2) 4M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE