
GIGA-BYTE TECHNOLOGY CO., LTD G A - 3 8 6 P S

Processor
Processor Speed
Chip Set
Max. Onboard DRAM
Cache
BIOS
Dimensions
I/O Options
INPU Options

80386DX 25MHz OPTI 8MB None AMI 330mm x 218mm 32-bit external memory card 80387/3167

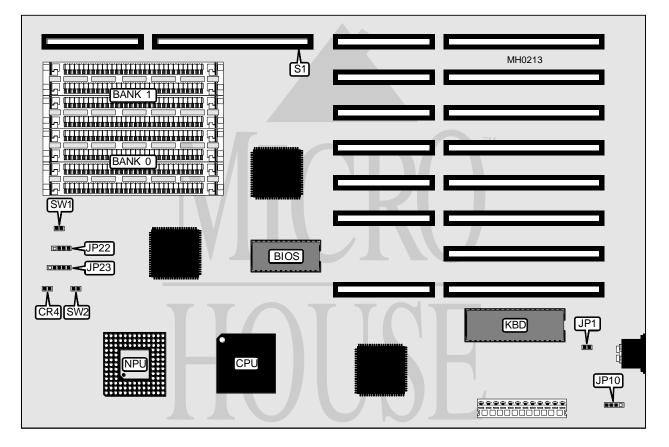

CONNECTIONS					
Purpose	Location	Purpose	Location		
Turbo LED	CR4	32-bit external memory card	S1		
External battery	JP10	Reset switch	SW1		
Speaker	JP22	Turbo switch	SW2		
Power LED & Keylock	JP23				

Continued on next page . . .

GIGA-BYTE TECHNOLOGY CO., LTD G A - 3 8 6 P S

... continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Monitor type select color	JP1	Closed		
Monitor type select monochrome	JP1	Open		
í CMOS memory normal operation (internal battery)	JP10	pins 1 & 2 closed		
CMOS memory clear	JP10	Open		
CMOS memory normal operation (external battery)	JP10	Closed		

DRAM CONFIGURATION					
Size	Bank 0	Bank 1			
1MB	(4) 256K x 9	NONE			
2MB	(4) 256K x 9	(4) 256K x 9			
4MB	(4) 1M x 9	NONE			
8MB	(4) 1M x 9	(4) 1M x 9			