
## AMERICAN DIGICOM CORPORATION 486 M

Processor	80486SX/80486DX
Processor Speed	33/50MHz
Chip Set	OPTI
Max. Onboard DRAM	32MB
Cache	64/256KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	4167

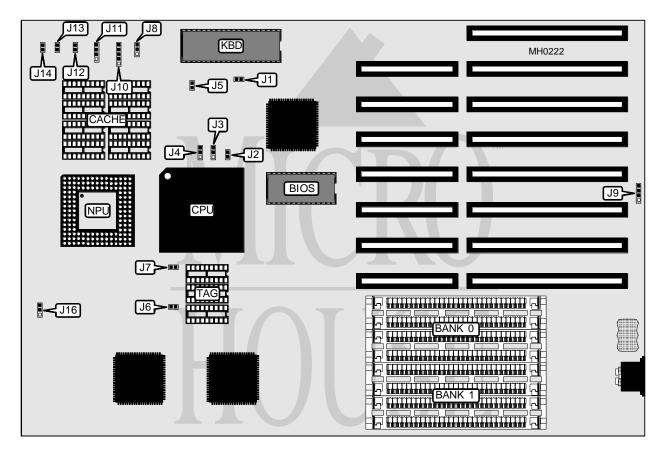

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	19	Turbo switch	J12
Power LED & keylock	J10	Turbo LED	J13
Speaker	J11	Reset switch	J14

Continued on next page . . .

## AMERICAN DIGICOM CORPORATION 486 M

... continued from previous page

USER CONFIGURABLE SETTINGS			
Function	Jumper	Position	
í Monitor type select color	J1	Closed	
Monitor type select monochrome	J1	Open	
í CMOS memory normal operation	18	pins 2 & 3 closed	
CMOS memory clear	18	pins 1 & 2 closed	
í CPU speed select 33MHz	J16	pins 1 & 2 closed	
CPU speed select 50MHz	J16	pins 2 & 3 closed	

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	
1MB	(4) 256K x 9	NONE	
2MB	(4) 256K x 9	(4) 256K x 9	
4MB	(4) 1M x 9	NONE	
5MB	(4) 256K x 9	(4) 1M x 9	
8MB	(4) 1M x 9	(4) 1M x 9	
16MB	(4) 4M x 9	NONE	
20MB	(4) 1M x 9	(4) 4M x 9	
32MB	(4) 4M x 9	(4) 4M x 9	

CACHE CONFIGURATION			
Size	TAG		
64KB	64KB (8) 8K x 8		
256KB	(8) 32K x 8	(3) 16K x 4	

CACHE CONFIGURATION			
Size	JP5	JP6	JP7
64KB	Open	Open	Open
256KB	Closed	Closed	Closed

CPU TYPE CONFIGURATION			
Туре	J2	J3	J4
80486SX	Open	Open	pins 2 & 3 closed
80486DX	Closed	pins 2 & 3 closed	pins 1 & 2 closed