


SILICON VALLEY COMPUTER, INC.

SVC 386SX

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	OPTI
Max. Onboard DRAM	16MB
Cache	16/64KB
BIOS	SVC
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

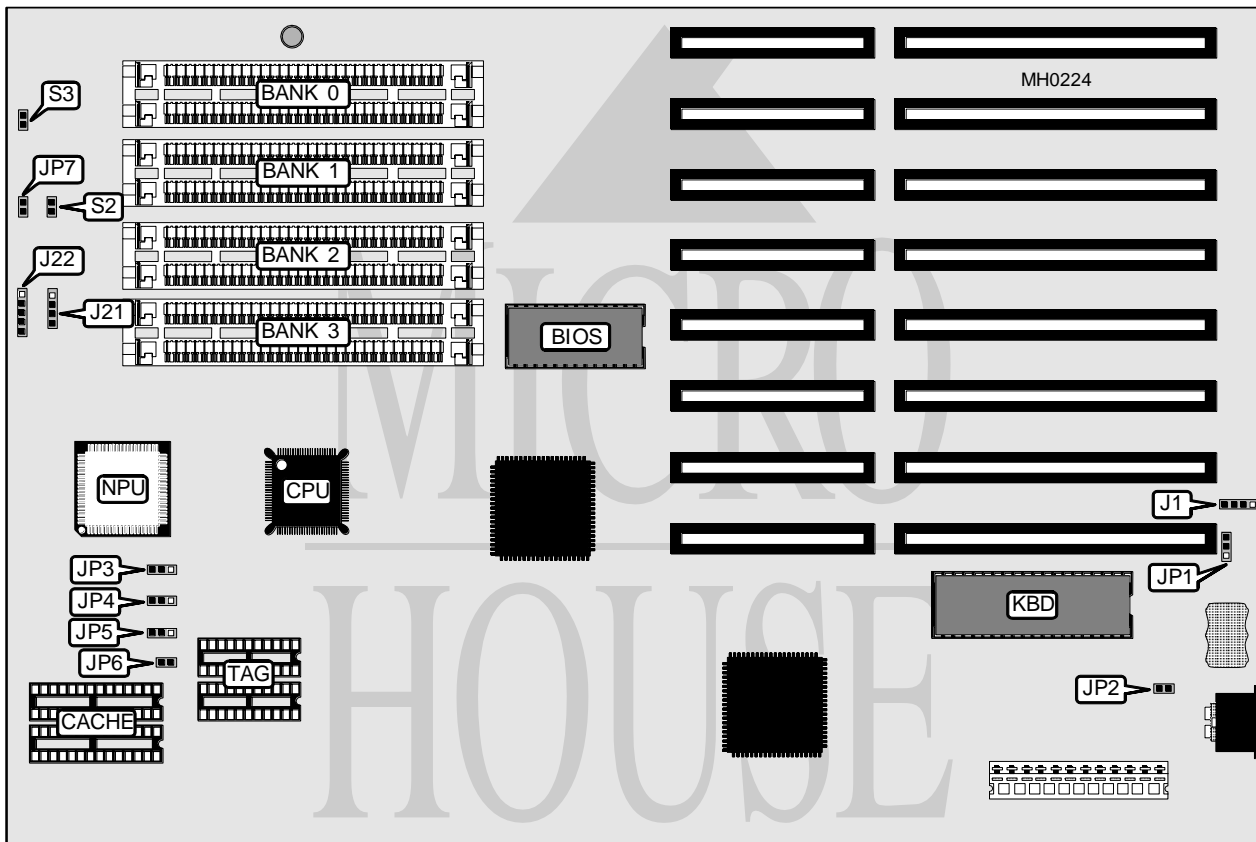

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo LED	JP7
Speaker	J21	Reset switch	S2
Power LED & keylock	J22	Turbo switch	S3

Continued on next page . . .

SILICON VALLEY COMPUTER, INC.

SVC386SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open
í CMOS memory normal operation	JP2	pins 2 & 3 closed
CMOS memory clear	JP2	pins 1 & 2 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE	NONE	NONE
9MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE

CACHE CONFIGURATION		
Size	Bank 0	TAG
16KB	(2) 8K x 8	(2) 4K x 4
64KB	(2) 32K x 8	(2) 16K x 4

CACHE JUMPER CONFIGURATION				
Size	JP3	JP4	JP5	JP6
16KB	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed	Open
64KB	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed	Closed