


SOLECTEK COMPUTER SUPPLY, INC.

386DX

Processor	80386DX
Processor Speed	25MHz
Chip Set	OPTI
Max. Onboard DRAM	32MB
SRAM Cache	None
BIOS	AMI
Dimensions	330mm x 220mm
I/O Options	32-bit external memory card slot
NPU Options	80387/3167

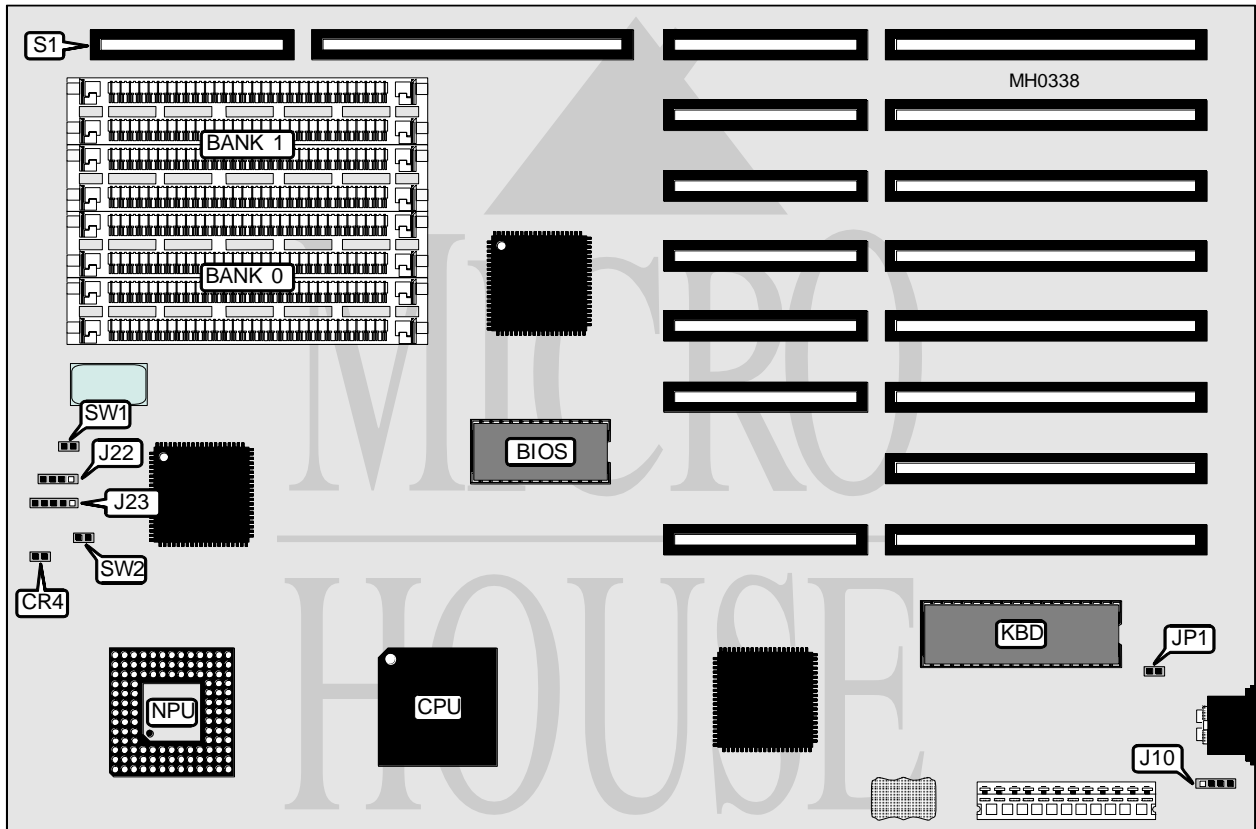

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	CR4	32-bit external memory card	S1
External battery	J10	Reset switch	SW1
Speaker	J22	Turbo switch	SW2
Power LED & keylock	J23		

Continued on next page . . .

SOLECTEK COMPUTER SUPPLY, INC.
386DX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	closed
Monitor type select monochrome	JP1	open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	NONE
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE	NONE	NONE
20MB	(4) 1M x 9	(4) 4M x 9	NONE	NONE
24MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	NONE
28MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9	NONE	NONE
36MB	(4) 1M x 9	(4) 4M x 9	(4) 4M x 9	NONE
40MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	(4) 4M x 9
48MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	NONE
52MB	(4) 1M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

Notes: Banks 2 and 3 are utilized when a 32-bit external memory card is installed at S1.