


QUALOGY, INC.

QPC-5155A/QPC-5155B

Processor 80386DX
Processor Speed 25/33MHz
Chip Set VLSI
Max. Onboard DRAM 32MB
Cache 16KB (82395DX)
BIOS Phoenix
Dimensions 334mm x 121mm
I/O Options None
NPU Options 80387/3167

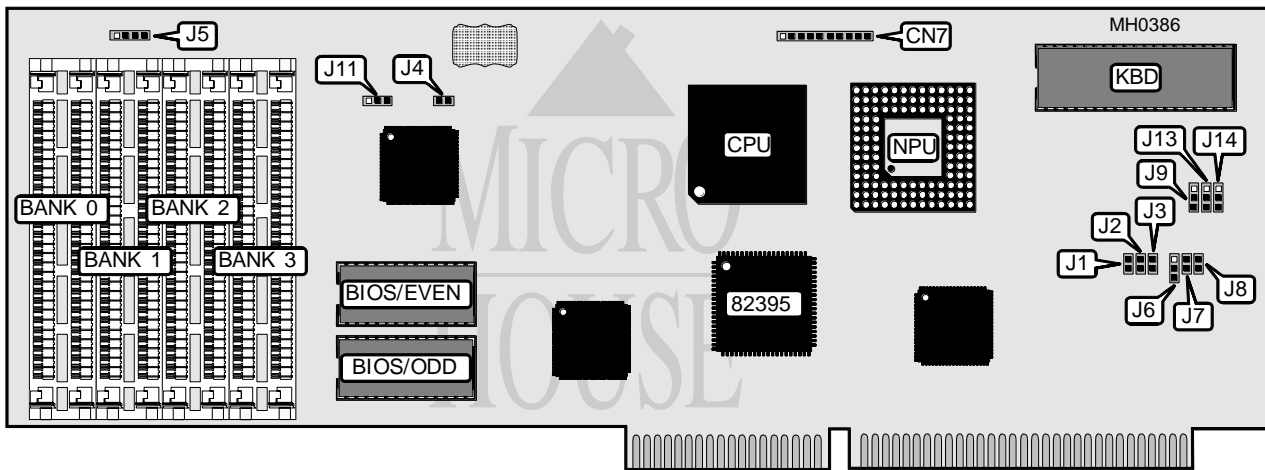

CONNECTIONS			
Purpose	Location	Purpose	Location
LEDPWR	CN7/Pin 1	KBDPWRF	CN7/Pin 7
KBDINH	CN7/Pin 2	KBDGND	CN7/Pin 8
RETSW	CN7/Pin 3	KBDDATF	CN7/Pin 9
GND	CN7/Pin 4	KDBCLKF	CN7/Pin 10
SPKRF	CN7/Pin 5	Speaker	J5
PWRGD	CN7/Pin 6		

Continued on next page . . .

QUALOGY, INCORPORATED

QPC-5155A/QPC-5155B

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter.	J1	Open
í Factory configured - do not alter.	J2	Open
í NPU mode select synchronous with CPU	J3	Open
NPU mode select asynchronous with CPU	J3	Closed
í SD bus current drive select 12mA	J4	Open
SD bus current drive select 24mA	J4	Closed
í BIOS type select 27256	J6	pins 2 & 3 closed
BIOS type select 27512	J6	pins 1 & 2 closed
í Factory configured - do not alter	J7	Open
í Monitor type select color	J8	Closed
Monitor type select monochrome	J8	Open
í Factory configured - do not alter	J9	pins 1 & 2 closed
í Factory configured - do not alter	J11	pins 1 & 2 closed
í Factory configured - do not alter	J13	pins 1 & 2 closed
í Factory configured - do not alter	J14	pins 1 & 2 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE
17MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	(2) 4M x 9
20MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	(2) 4M x 9
32MB	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9