


## FIRST INTERNATIONAL COMPUTER, INC.

386SX - 16/201

Processor	80386SX
Processor Speed	16/20MHz
Chip Set	Intel
Max. Onboard DRAM	32MB
Cache	None
BIOS	AMI/Award/Phoenix
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

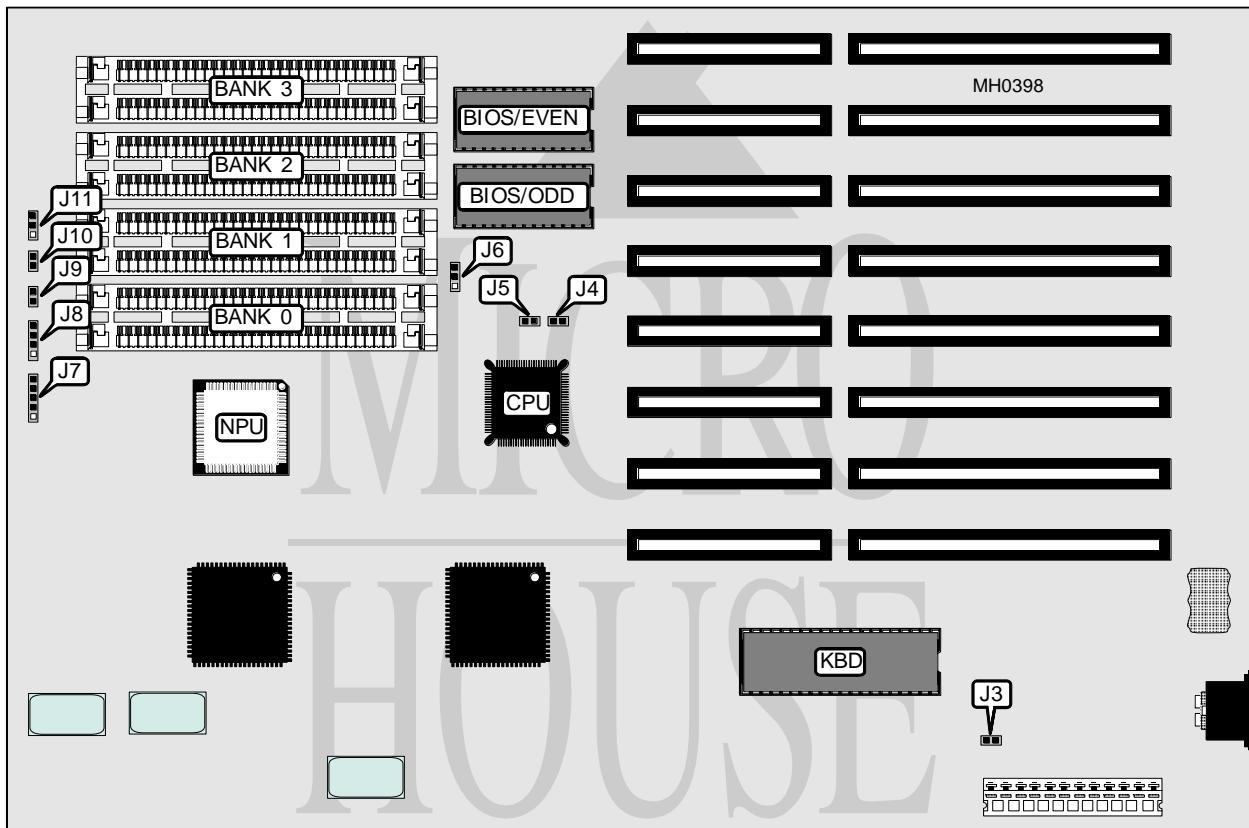

## CONNECTIONS

Purpose	Location	Purpose	Location
Power LED & keylock	J7	Turbo LED	J9
Speaker	J8	Reset switch	J10

*Continued on next page . . .*

# FIRST INTERNATIONAL COMPUTER, INC.

## 386SX-16/201

*... continued from previous page*

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J3	Closed
Monitor type select monochrome	J3	Open
í Pipeline mode enabled	J4	Closed
Pipeline mode disabled	J4	Open
NPU mode select synchronous with CPU	J5	Open
NPU mode select asynchronous with CPU	J5	Closed
í NPU mode enabled	J6	pins 2 & 3 closed
NPU mode disabled	J6	pins 1 & 2 closed
í CPU speed select switchable from keyboard	J11	pins 1 & 2 closed
CPU speed select fast	J11	pins 2 & 3 closed
CPU speed select slow	J11	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9			
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 256K x 9	(2) 1M x 9	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9			
8MB	(2) 4M x 9	NONE	NONE	NONE
9MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE
17MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	(2) 4M x 9
18MB	(2) 4M x 9	(2) 4M x 9	(2) 1M x 9	NONE
20MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	(2) 4M x 9
24MB	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9	NONE
32MB	(2) 4M x 9			