


HYUNDAI ELECTRONICS, INC.

SUPER-386STC

Processor	80386SX
Processor Speed	20MHz
Chip Set	VLSI
Max. Onboard DRAM	32MB
Cache	16KB (82385SX)
BIOS	AMI
Dimensions	218mm x 330mm
I/O Options	Serial ports (2), parallel port, IDE interface, floppy drive interface
NPU Options	80387SX

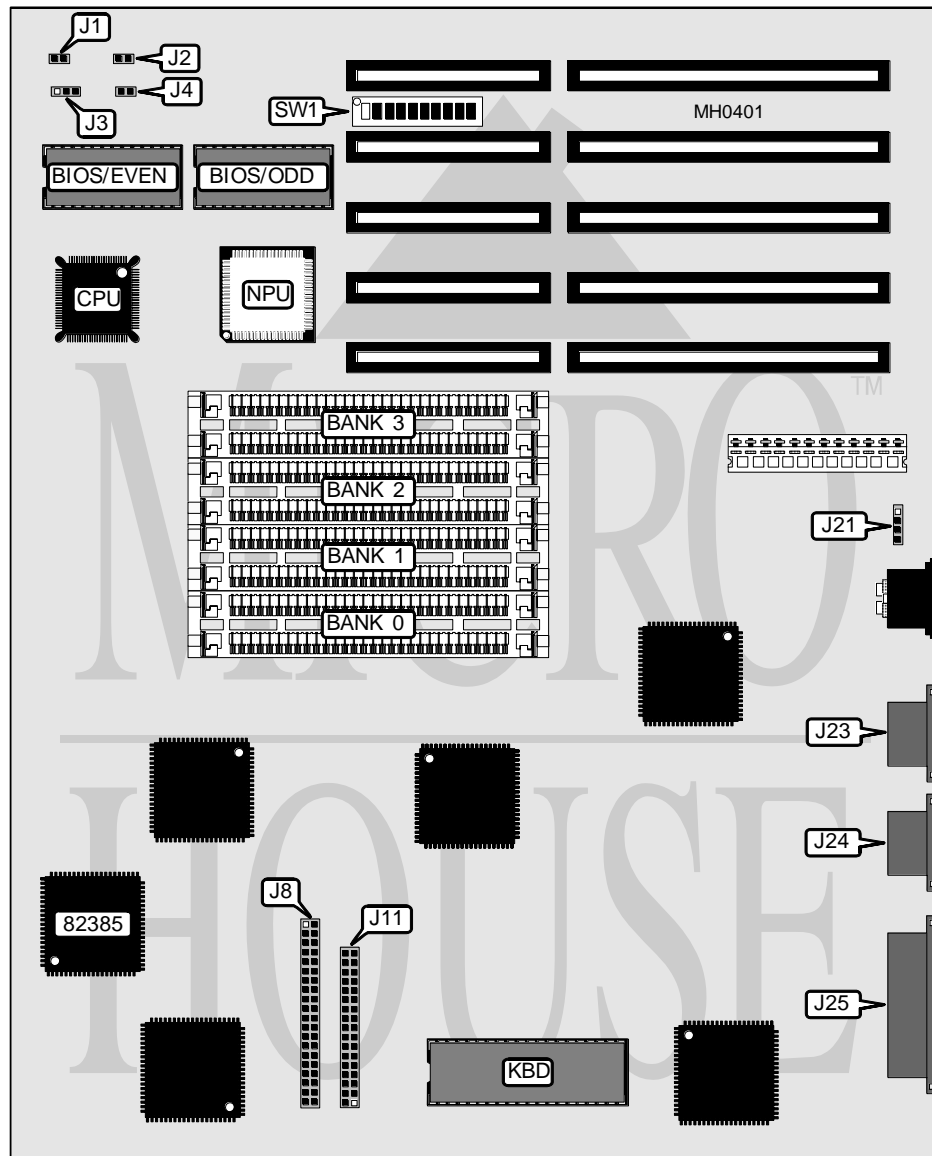

Continued on next page . . .

HYUNDAI ELECTRONICS, INC.

SUPER-386STC

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Floppy drive interface	J11
Reset switch	J2	External battery	J21
Turbo switch	J3	Serial port 2	J23
IDE LED	J4	Serial port 1	J24
IDE interface	J8	Parallel port	J25

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Serial port 2 (J23) enabled	SW1/1	On
Serial port 2 (J23) disabled	SW1/1	Off
í Monitor type select color	SW1/2	On
Monitor type select monochrome	SW1/2	Off
í IDE interface enabled	SW1/4	Off
IDE interface disabled	SW1/4	On
í Floppy drive interface enabled	SW1/5	Off
Floppy drive interface disabled	SW1/5	On
í Serial port 1 (J24) enabled	SW1/7	On
Serial port 1 (J24) disabled	SW1/7	Off
í Factory configured - do not alter	SW1/10	N/A

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE	NONE	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE
24MB	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9	NONE
32MB	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9

PARALLEL PORT CONFIGURATION					
Setting	Address	SW1/3	SW1/6	SW1/8	SW1/9
LPT1	IRQ7	On	Off	Off	On
LPT1	Other	On	Off	Off	Off
LPT2	IRQ5	On	On	On	Off
LPT2	Other	On	On	Off	Off
Disabled	Disabled	Off	Off	Off	Off