


IBM CORPORATION

PC-XT 5160-086

Processor	8086
Processor Speed	4.77MHz
Chip Set	None
Max. Onboard DRAM	256KB
Cache	None
BIOS	IBM
Dimensions	273mm x 218mm
I/O Options	None
NPU Options	8087

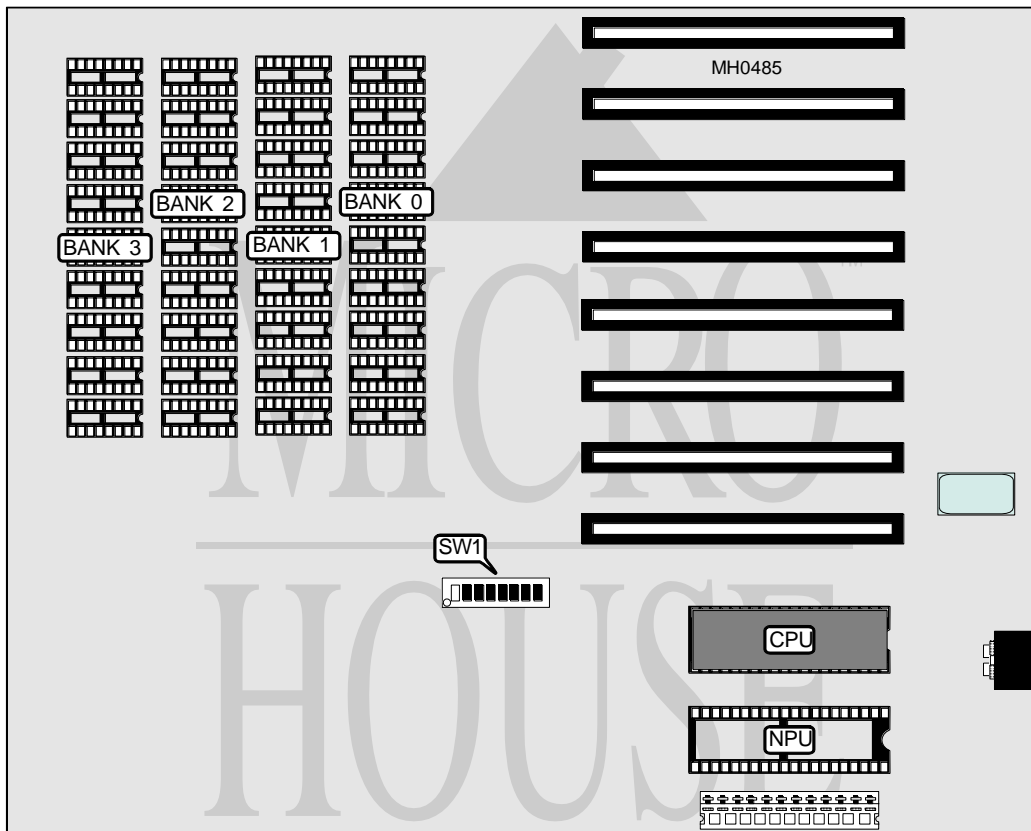

Continued on next page . . .

IBM CORPORATION

PC-XT 5160-086

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Factory configured - do not alter	SW1/1	Off
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
128KB	(9) 4164	(9) 4164	NONE	NONE
192KB	(9) 4164	(9) 4164	(9) 4164	NONE
256KB	(9) 4164	(9) 4164	(9) 4164	(9) 4164

DRAM SWITCH CONFIGURATION		
Size	SW1/3	SW1/4
128KB	Off	On
192KB	On	Off
256KB	Off	Off

VIDEO CONFIGURATION		
Setting	SW1/5	SW1/6
í CGA 80 x 25	On	Off
CGA 40 x 25	Off	On
MDA (or MDA and CGA)	Off	Off
None	On	On

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On