


DATA TECHNOLOGY CORPORATION DTC5180C

Q2/94

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Two MFM ST506/412 drives
 Floppy drives supported: None

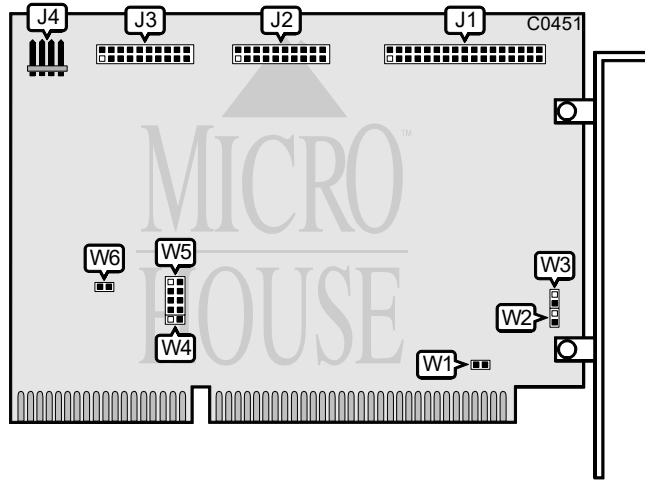

CONNECTIONS	
Function	Location
34-pin control cable connector - hard drive	J1
20-pin data cable connector-drive 0	J2
20-pin data cable connector-drive 1	J3
4-pin connector - drive active LED	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Floppy drive change signal driven low	W1	closed
Floppy drive change not driven	W1	open
f Hard drive port address is 1F0-1F7h	W2 & W3	open
Hard drive port address is 170-177h	W2 & W3	closed

COMPAQ/IBM AT DRIVE SELECT CONTROL					
Mode	W5/jumper 1	W5/jumper 2	W5/jumper 3	W5/jumper 4	W6
f IBM AT	open	closed	open	closed	open
Compaq	closed	open	closed	open	closed

MISCELLANEOUS TECHNICAL NOTES
The function of jumper W4 is undocumented.