


ASIA DATA, INC.

GOLD - 286

Processor	80286
Processor Speed	12/16MHz
Chip Set	Unidentified
Max. Onboard DRAM	5MB
Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80287

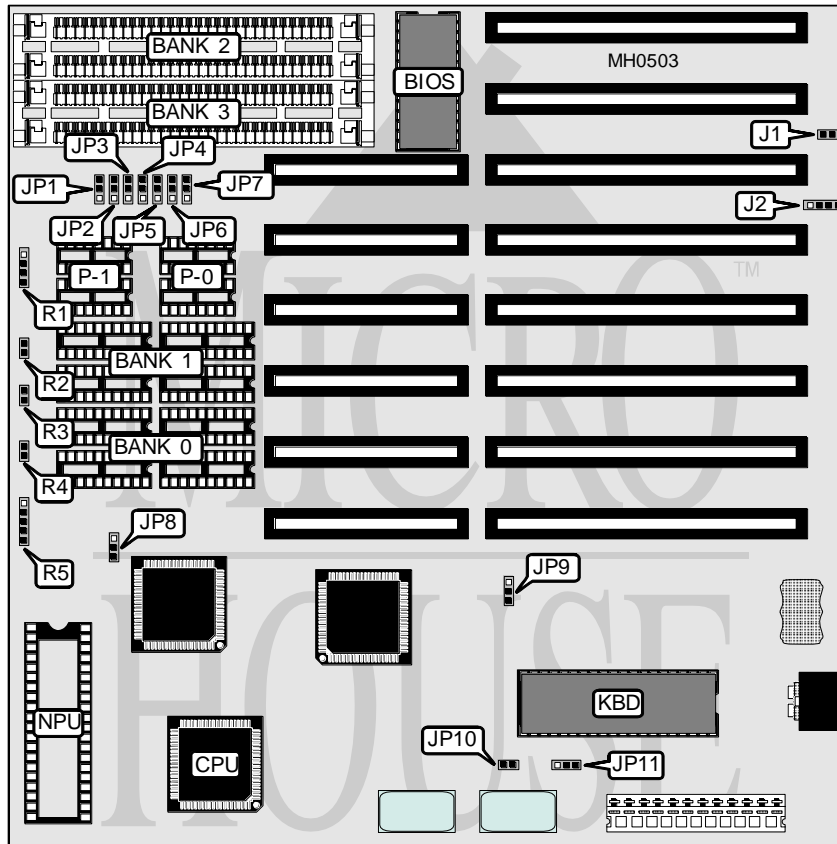

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	R1	Turbo switch	R4
Reset switch	R2	Power LED & keylock	R5
Turbo LED	R3	External battery	J2

Continued on next page . . .

ASIA DATA, INC.

GOLD - 286

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	J1	Closed
CMOS memory clear	J1	Open
í BIOS type select 27512	JP7	pins 1 & 2 closed
BIOS type select 27256	JP7	pins 2 & 3 closed
í CPU speed select 16 MHz	JP8	pins 2 & 3 closed
CPU speed select 12 MHz	JP8	pins 1 & 2 closed
í NPU mode select synchronous with CPU	JP9	pins 1 & 2 closed
NPU mode select asynchronous with CPU	JP9	pins 2 & 3 closed
í Monitor type select color	JP10	Closed
Monitor type select monochrome	JP10	Open
í Keyboard BIOS select 8742 pin #32	JP11	pins 1 & 2 closed
Keyboard BIOS select 8742 pin #23	JP11	pins 2 & 3 closed

DRAM CONFIGURATION						
Size	Bank 0	Bank 1	Bank 2	Bank 3	P-0	P-1
512KB	(4) 44256	NONE	NONE	NONE	(2) 41256	NONE
512KB	NONE	NONE	(2) 256K x 9	NONE	NONE	NONE
1MB	(4) 44256	(4) 44256	NONE	NONE	(2) 41256	(2) 41256
1MB	NONE	NONE	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(4) 44256	(4) 44256	(2) 256K x 9	(2) 256K x 9	(2) 41256	(2) 41256
2MB	NONE	NONE	(2) 1M x 9	NONE	NONE	NONE
3MB	(4) 44256	(4) 44256	(2) 1M x 9	NONE	(2) 41256	(2) 41256
4MB	NONE	NONE	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(4) 44256	(4) 44256	(2) 1M x 9	(2) 1M x 9	(2) 41256	(2) 41256

MAXIMUM MEMORY SIZE SETTINGS						
Size	JP1	JP2	JP3	JP4	JP5	JP6
4MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
5MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.