


# TEKRAM TECHNOLOGY CO., LTD.

## DC-820

Q2/94

Data bus: 32-bit, EISA  
 Size: Full-length, full-height card  
 Hard drive supported: Up to seven SCSI devices  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

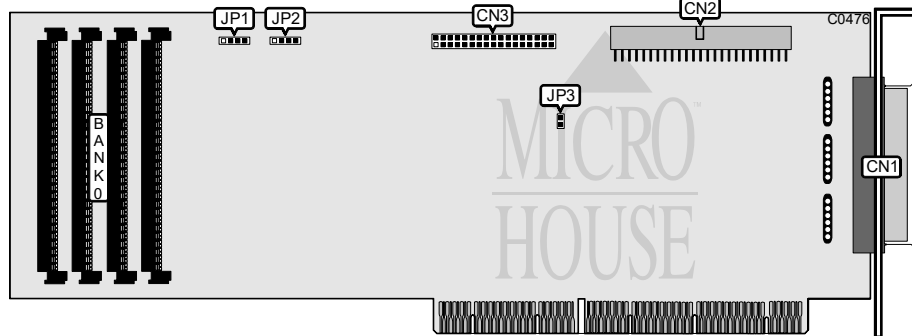

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	CN1
50-pin SCSI connector - internal	CN2
34-pin control cable connector - floppy drive	CN3
4-pin connector - drive active LED	JP1
4-pin connector - cache error speaker	JP2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
if Floppy drive enabled	JP3	closed
Floppy drive disabled	JP3	open

DRIVE ACTIVE LED ERROR CODES (IMMEDIATELY AFTER POWER-UP)	
Status	Function
One short flash	DC-820 CPU error
Two short flashes	SCSI chip error
Three short flashes	BMIC (EISA bus) chip error
Four short flashes	SRAM error
Five short flashes	EPR0M checksum error

MISCELLANEOUS TECHNICAL NOTES
All four sockets of Bank 0 must be filled with SIMMs of the same size - 256KB, 1MB, or 4MB.