


EVERSOURCE COMPUTERS, INC.

USA 486DX

Processor	80486DX
Processor Speed	33/50MHz
Chip Set	OPTI
Max. Onboard DRAM	32MB
Cache	256KB
BIOS	AMI
Dimensions	330mm x 220mm
I/O Options	None
NPU Options	4167

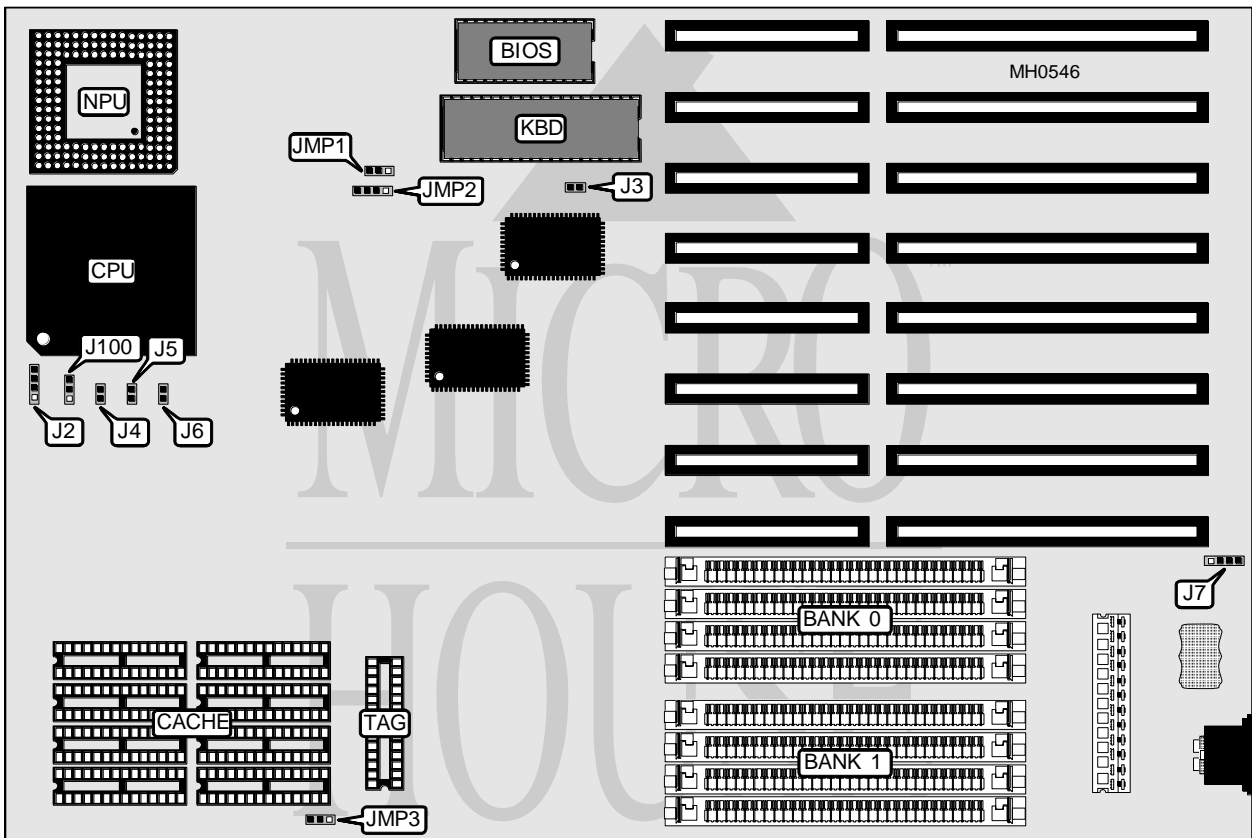

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J2	Reset switch	J6
Turbo switch	J4	External battery	J7
Turbo LED	J5	Speaker	J100

Continued on next page . . .

EVERSOURCE COMPUTERS, INC.
USA 486DX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J3	Closed
Monitor type select monochrome	J3	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
1MB	NONE	(4) 256K x 9
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
4MB	NONE	(4) 1M x 9
5MB	(4) 256K x 9	(4) 1 M x 9
5MB	(4) 1 M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
16MB	NONE	(4) 4M x 9
17MB	(4) 4M x 9	(4) 256K x 9
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 1
128KB	(4) 32K x 8	NONE	(1) 8K x 1
256KB	(4) 32K x 8	(4) 32K x 8	(1) 8K x 1

Note: The exact location of TAG is unidentified.

CACHE JUMPER CONFIGURATION			
Size	JMP1	JMP2	JMP3
64KB	pins 1 & 2 closed	pins 1 & 2, 3 & 4 closed	pins 1 & 2 closed
128KB	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed
256KB	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed