


UNIDENTIFIED

LM - 103

Processor 80286
Processor Speed 12.5/16MHz
Chip Set Headland
Max. Onboard DRAM 4MB
Cache None
BIOS AMI
Dimensions 212mm x 218mm
I/O Options None
NPU Options 80287

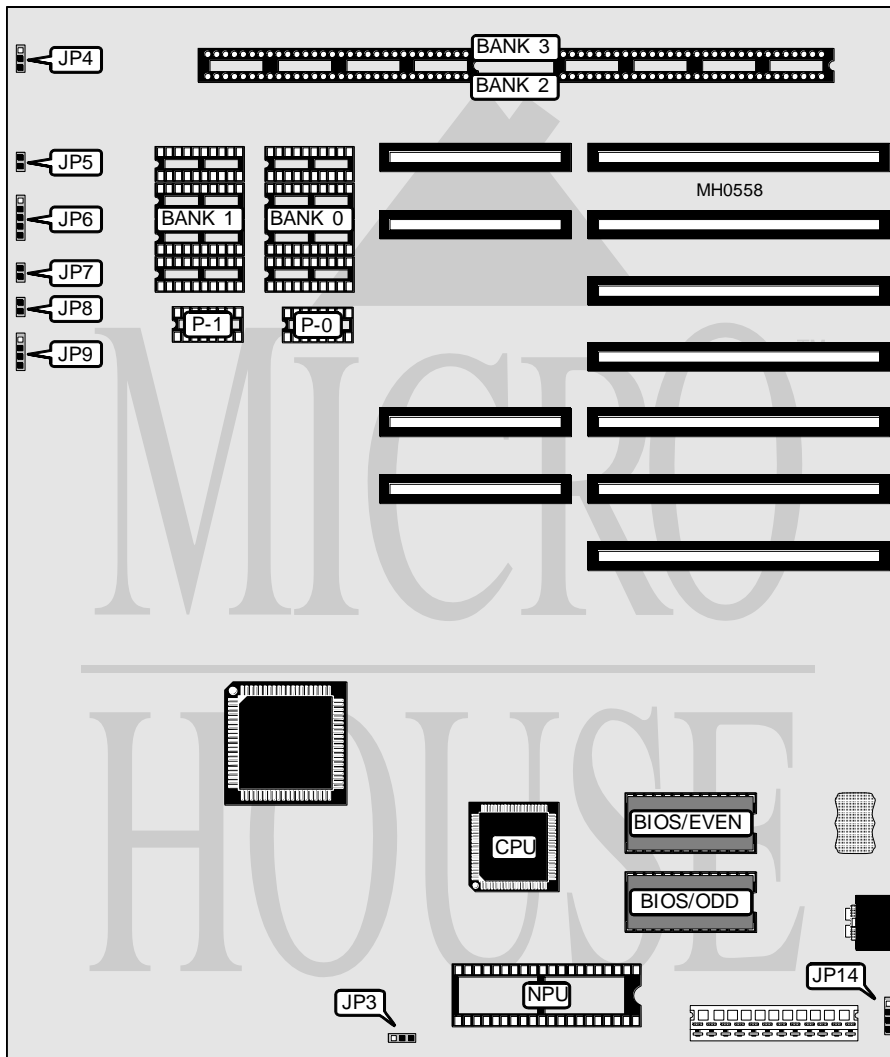

| CONNECTIONS | | | |
|---------------------|----------|--------------|----------|
| Purpose | Location | Purpose | Location |
| Turbo switch | JP5 | Reset switch | JP8 |
| Power LED & keylock | JP6 | Speaker | JP9 |
| Turbo LED | JP7 | | |

Continued on next page . . .

UNIDENTIFIED

LM - 103

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|--------------------------------|--------|-------------------|
| Function | Jumper | Position |
| í NPU speed select 10.7/8.3MHz | JP3 | pins 1 & 2 closed |
| NPU speed select 5.3/4.2MHz | JP3 | pins 2 & 3 closed |
| í Monitor type select color | JP4 | pins 2 & 3 closed |
| Monitor type select monochrome | JP4 | pins 1 & 2 closed |
| í CMOS memory normal operation | JP14 | pins 1 & 2 closed |
| CMOS memory clear | JP14 | pins 3 & 4 closed |
| CMOS battery disconnected | JP14 | Open |

| DRAM CONFIGURATION | | | | | | |
|--------------------|-----------|-----------|-----------|-----------|--------------|--------------|
| Size | Bank 0 | P-0 | Bank 1 | P-1 | Bank 2 | Bank 3 |
| 512KB | (4) 44256 | (2) 41256 | NONE | NONE | NONE | NONE |
| 512KB | NONE | NONE | NONE | NONE | (2) 256K x 9 | NONE |
| 640KB | (4) 44256 | (2) 41256 | (4) 4464 | (2) 4164 | NONE | NONE |
| 1MB | (4) 44256 | (2) 41256 | (4) 44256 | (2) 41256 | NONE | NONE |
| 1MB | (4) 44256 | (2) 41256 | NONE | NONE | NONE | (2) 256K x 9 |
| 1MB | NONE | NONE | (4) 44256 | (2) 41256 | (2) 256K x 9 | NONE |
| 1MB | NONE | NONE | NONE | NONE | (2) 256K x 9 | (2) 256K x 9 |
| 4MB | NONE | NONE | NONE | NONE | (4) 1M x 9 | NONE |