
ASUS COMPUTER INTERNATIONAL I S A - 3 8 6 U 3

Processor	80386DX
Processor Speed	25/33/40MHz
Chip Set	UMC
Max. Onboard DRAM	32MB
Cache	64/128/256KB
BIOS	AMI
Dimensions	221mm x 234mm
I/O Options	None
NPU Options	80387/3167

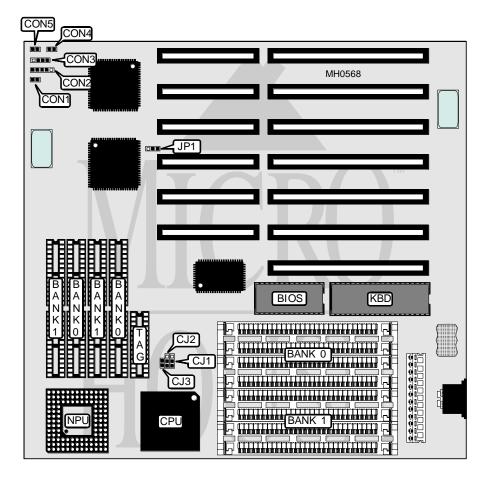

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	CON1	Turbo switch	CON4
Power LED & Keylock	CON2	Reset switch	CON5
Speaker	CON3		

Continued on next page . . .

ASUS COMPUTER INTERNATIONAL I S A - 3 8 6 U 3

... continued from previous page

USER CONFIGURABLE SETTINGS			
Function	Jumper	Position	
í NPU select 3167 or none	JP1	pins 1 & 2 closed	
NPU select 80387	JP1	pins 2 & 3 closed	

	DRAM CONFIGURATION	
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION			
Size	CJ1	CJ2	CJ3
64KB	pins 2 & 3 closed	pins 2 & 3 closed	Open
128KB	pins 1 & 2 closed	Open	Closed
256KB	pins 1 & 2 closed	pins 1 & 2 closed	Open