


RANCHO TECHNOLOGY, INC.
RT1000C-6/RT1000C-8

Q4/94

Data bus: 8-bit, ISA
 Size: Half-length, full-height card
 Hard drive supported: Up to seven SCSI devices
 Floppy drives supported: Two 360KB, 720KB, 1.2MB or 1.44MB drives

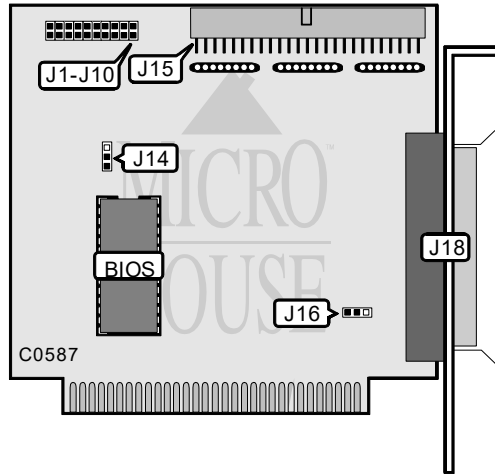

CONNECTIONS	
Function	Location
50-pin SCSI connector - internal	J15
50-pin SCSI connector - external	J18

USER CONFIGURABLE SETTINGS			
Function	Location	Setting	
I/O mapped data transfer enabled (BIOS-installed version)	J8	closed	
Memory mapped data transfer enabled (BIOS not installed)	J8	open	
i Other drive is Drive A:	J9	open	
Floptical drive is Drive A:	J9	closed	
Factory configured - do not alter	J10	open	
i Zero Wait State disabled	J14	pins 1 & 2 closed	
Zero Wait State enabled	J14	pins 2 & 3 closed	
i Terminator power disabled	J16	pins 1 & 2 closed	
Terminator power enabled	J16	pins 2 & 3 closed	

Continued on next page . . .

RANCHO TECHNOLOGY, INC.
RT1000C-6/RT1000C-8

... continued from previous page

MEMORY ADDRESS (MEMORY-MAPPED MODE)			
Base Address	J1	J2	J3
DC00h	closed	open	open
C800h	open	open	closed
CC00h	closed	open	closed
D000h	open	closed	closed
D400h	closed	closed	closed
D800h	open	open	open
E000h	open	closed	open
E400h	closed	closed	open

Note: This table applies to versions that do not have a BIOS installed (J8 is open).

I/O ADDRESS (I/O MAPPED MODE)			
Base Address	J1	J2	J3
348h	closed	open	open
280h	closed	closed	closed
290h	open	closed	closed
300h	closed	open	closed
310h	open	open	closed
330h	closed	closed	open
340h	open	closed	open
350h	open	open	open

Note: This table applies to versions that have a BIOS installed (J8 is closed).

INTERRUPT SELECT				
IRQ	J4	J5	J6	J7
IRQ3	open	open	open	closed
IRQ4	open	open	closed	open
IRQ5	open	closed	open	open
IRQ7	closed	open	open	open