


TEKRAM TECHNOLOGY COMPANY, LTD.
DC - 880B

Q3/95

Data bus: 32-bit VL-Bus
 Size: Full-length, half-height card
 Hard drive supported: Up to seven SCSI drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB, or 1.44MB, or 2.88MB drives

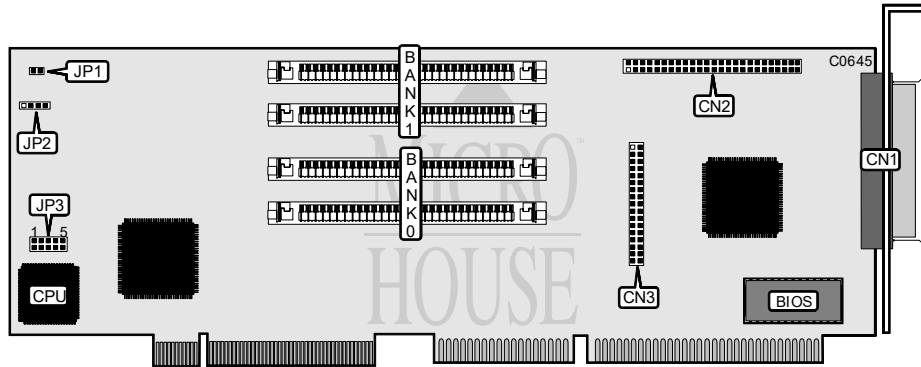

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	CN1
50-pin SCSI connector - internal	CN2
34-pin cable connector - floppy drive	CN3
2-pin connector - drive active LED	JP1
4-pin connector - speaker	JP2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive enabled	JP3/jumper 1	closed
Floppy drive disabled	JP3/jumper 1	open
í Factory configured - do not alter	JP3/jumper 5	open

Continued on next page...

TEKRAM TECHNOLOGY COMPANY, LTD.
DC - 880B

...continued from previous page

BASE I/O ADDRESS			
Address	JP3/jumper 2	JP3/jumper 3	JP3/jumper 4
í 330h	closed	closed	closed
130h	open	open	closed
134h	open	open	open
230h	open	closed	closed
234h	open	closed	open
334h	closed	open	closed

CACHE MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
2.5MB	(2) 1MB x 9	(2) 256K x 9
4MB	(2) 1MB x 9	(2) 1MB x 9
8MB	(2) 4MB x 9	NONE
8.5MB	(2) 4MB x 9	(2) 256K x 9
10MB	(2) 4MB x 9	(2) 1MB x 9
16MB	(2) 4MB x 9	(2) 4MB x 9

Note: Bank 0 must be installed while SIMM's can be mixed in any combination not exceeding 16MB.