


MITAC INTERNATIONAL CORPORATION

IH 3116/IH 3120/IH 3125

Processor	80386SX
Processor Speed	16/20MHz
Chip Set	C & T SCAT
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI/Award/Phoenix
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

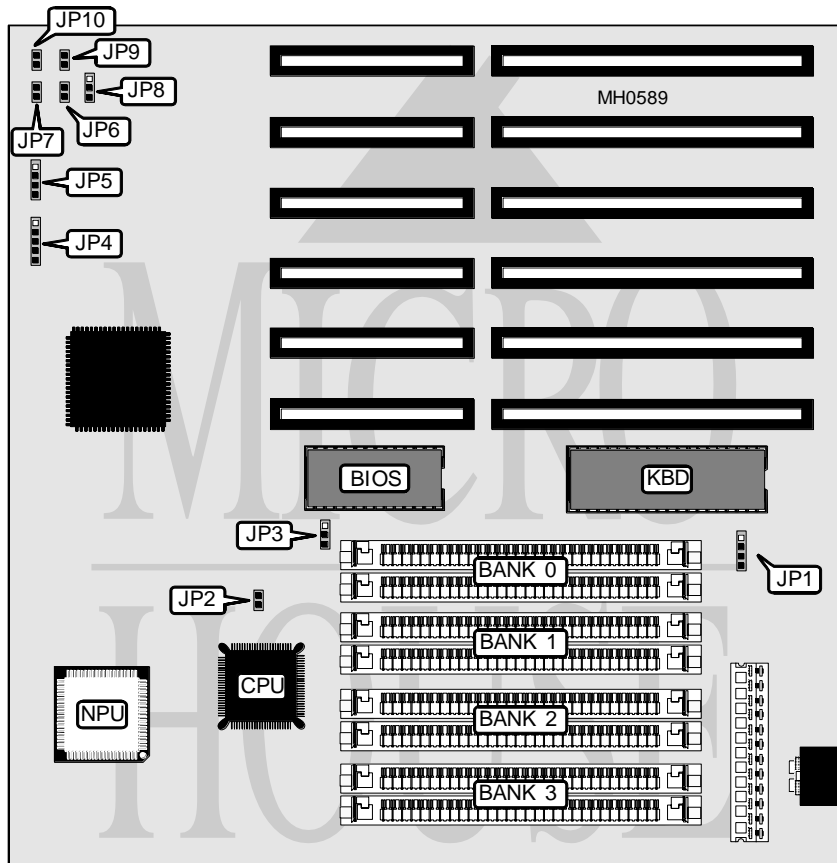

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP1	Turbo LED	JP6
Power LED & keylock	JP4	Reset switch	JP7
Speaker	JP5	Turbo switch	JP9

Continued on next page . . .

MITAC INTERNATIONAL CORPORATION

IH 3116/IH 3120/IH 3125

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Pipeline mode enabled	JP2	Closed
Pipeline mode disabled	JP2	Open
í CMOS memory normal operation	JP3	pins 2 & 3 closed
CMOS memory clear	JP3	pins 1 & 2 closed
í Power good signal detect from board	JP8	pins 2 & 3 closed
Power good signal detect from power supply	JP8	pins 1 & 2 closed
í Monitor type select color	JP10	Closed
Monitor type select monochrome	JP10	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
9MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE