


UNIDENTIFIED IDEPLUS-V4L

Q3/95

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drive supported: Two IDE(AT) interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

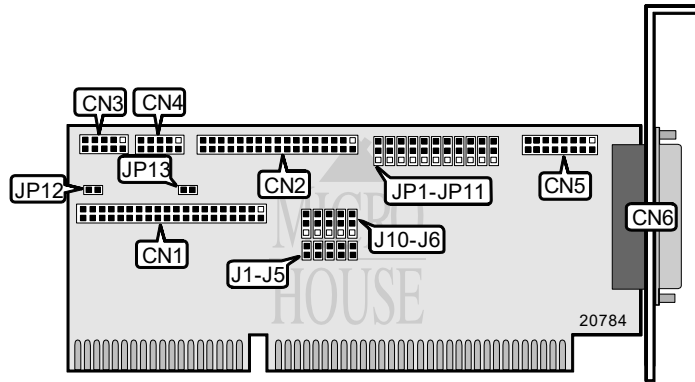

CONNECTIONS	
Function	Location
40-pin IDE(AT) connector	CN1
34-pin floppy drive connector	CN2
10-pin serial port 1 - internal	CN3
10-pin serial port 2 - internal	CN4
16-pin game port	CN5
25-pin parallel port - external	CN6
2-pin connector - drive active LED	JP12

Continued on next page...

UNIDENTIFIED IDEPLUS-V4L

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í IDE interface enabled	JP1/pins 1 & 2	closed
IDE interface disabled	JP1/pins 2 & 3	closed
í Floppy drive enabled	JP2/pins 1 & 2	closed
Floppy drive disabled	JP2/pins 2 & 3	closed
í Game port enabled	JP3/pins 1 & 2	closed
Game port disabled	JP3/pins 2 & 3	open
í IDE primary address is 1F0h	JP4/pins 1 & 2	closed
IDE secondary address is 170h	JP4/pins 2 & 3	closed
í Floppy drive primary address is 3F0h	JP10/pins 1 & 2	closed
Floppy drive secondary address is 370h	JP10/pins 2 & 3	closed
í IRQ14 enabled	JP13	closed
IRQ14 disabled	JP13	open

SERIAL PORT 1 CONFIGURATION		
Address	JP7	JP8
í 3F8h (COM1)	pins 1 & 2 closed	pins 1 & 2 closed
3E8h (COM3)	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	N/A	pins 2 & 3 closed

SERIAL PORT 2 CONFIGURATION		
Address	JP5	JP6
í 2F8h (COM2)	pins 1 & 2 closed	pins 1 & 2 closed
2E8h (COM4)	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	N/A	pins 2 & 3 closed

PARALLEL PORT CONFIGURATION		
Address	JP9	JP11
í 378h (LPT1)	pins 1 & 2 closed	pins 1 & 2 closed
278h (LPT2)	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	N/A	pins 2 & 3 closed

SERIAL PORT 1 INTERRUPT SELECTION					
IRQ	J6	J7	J8	J9	J10
í 4	open	pins 2 & 3	open	open	open
3	pins 2 & 3	open	open	open	open
5	open	open	pins 2 & 3	open	open
7	open	open	open	pins 2 & 3	open
9	open	open	open	open	pins 2 & 3

Note: Designated pins are in the closed position.

Continued on next page...

UNIDENTIFIED IDEPLUS-V4L

... continued from previous page

SERIAL PORT 2 INTERRUPT SELECTION					
IRQ	J6	J7	J8	J9	J10
3	pins 1 & 2	open	open	open	open
4	open	pins 1 & 2	open	open	open
5	open	open	pins 1 & 2	open	open
7	open	open	open	pins 1 & 2	open
9	open	open	open	open	pins 1 & 2

Note: Designated pins are in the closed position.

PARALLEL PORT INTERRUPT SELECTION					
IRQ	J1	J2	J3	J4	J5
7	open	open	open	closed	open
3	closed	open	open	open	open
4	open	closed	open	open	open
5	open	open	closed	open	open
9	open	open	open	open	closed