


JAMECO ELECTRONIC COMPONENTS

JE3616

Processor	80386SX
Processor Speed	16/20/25MHz
Chip Set	C & T SCAT
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

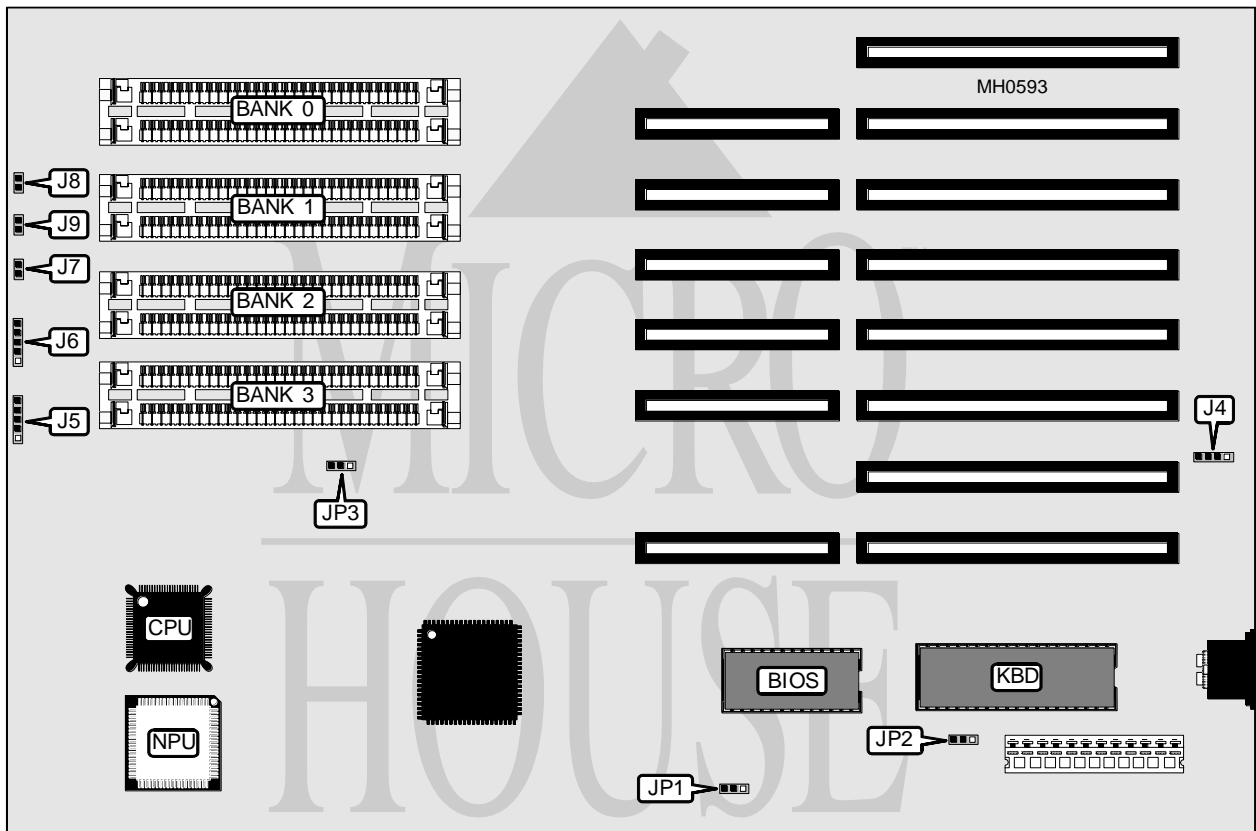

CONNECTIONS				
Purpose	Location	Purpose	Location	
External battery	J4	Reset switch	J7	
Power LED & keylock	J5	Turbo LED	J8	
Speaker	J6	Turbo switch	J9	

Continued on next page . . .

JAMECO ELECTRONIC COMPONENTS

JE3616

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Jumper	Position
í Power good signal detect from power supply	JP1	pins 2 & 3 closed
Power good signal detect from board	JP1	pins 1 & 2 closed
í Monitor type select color	JP2	pins 2 & 3 closed
Monitor type select monochrome	JP2	pins 1 & 2 closed

DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
9MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE

DRAM JUMPER CONFIGURATION

Type	JP3
256K x 9, 1M x 9 or 4M x 9	pins 1 & 2 closed
4M x 9 only	pins 2 & 3 closed