


HYUNDAI ELECTRONICS, INC. SUPER 486/33E (CORPORATE SERIES)

Processor	80486DX
Processor Speed	33MHz
Chip Set	AMI
Max. Onboard DRAM	32MB
Cache	128KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	AMI proprietary memory module, bus mouse, floppy drive interface, 32-bit external memory card slot
NPU Options	4167

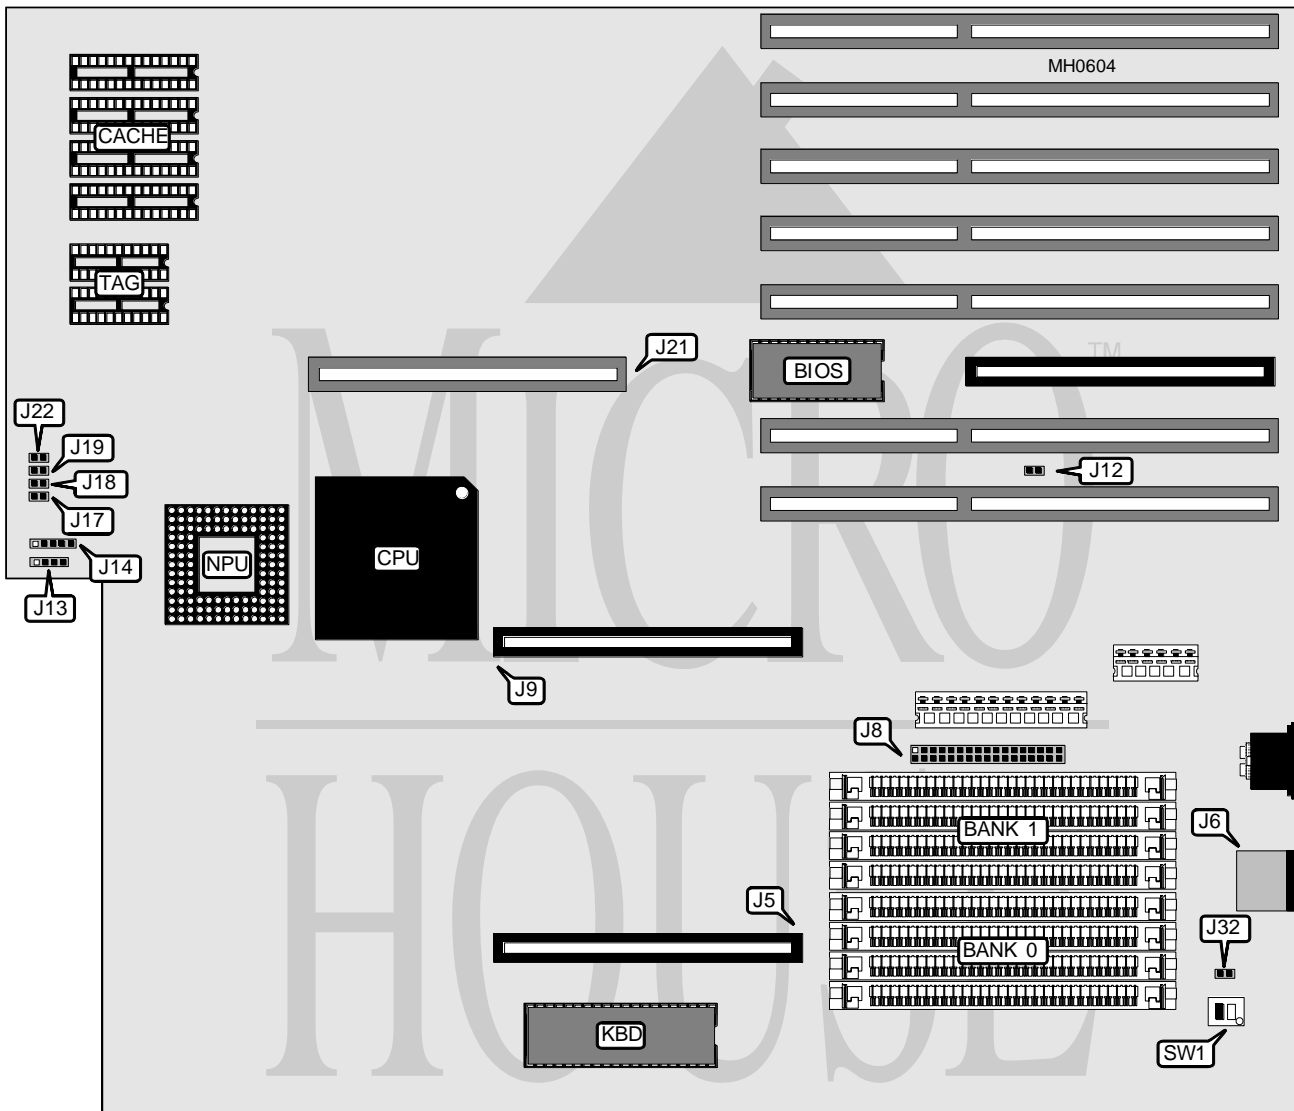

Continued on next page . . .

HYUNDAI ELECTRONICS, INC.

SUPER 486/33E (CORPORATE SERIES)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
AMI proprietary memory module	J5 & J9	Reset switch	J17
Bus mouse port	J6	Turbo switch	J18
Floppy drive interface	J8	Turbo LED	J19
Speaker	J13	32-bit external memory card	J21
Power LED & keylock	J14	Diagnostic LED	J22

USER CONFIGURABLE SETTINGS			
Function	Jumper/Switch	Position	
í Factory configured - do not alter	J12	Open	
í Factory configured - do not alter	J32	Open	
í Factory configured - do not alter	SW1/1	N/A	
í Monitor type select monochrome	SW1/2	Off	
Monitor type select color	SW1/2	On	
Note: The location of J32 is unidentified.			

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	
4MB	(4) 1M x 9	NONE	
8MB	(4) 1M x 9	(4) 1M x 9	
16MB	(4) 4M x 9	NONE	
32MB	(4) 4M x 9	(4) 4M x 9	

CACHE CONFIGURATION			
Size	Bank 0	TAG	
128KB	(4) 32K x 8	(2) 16K x 4	