


ATRONICS INTERNATIONAL, INC. IDE-2015PL

Q4/95

Data bus: 32-bit VL-bus
 Size: Three-quarter length, half-height card
 Hard drive supported: Two IDE(AT) drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

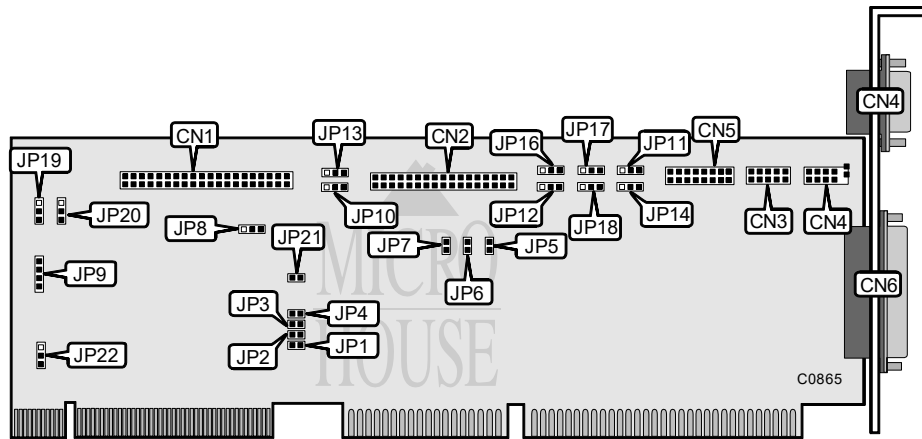

CONNECTIONS	
Function	Location
40-pin IDE(AT) connector	CN1
34-pin cable connector - floppy drive	CN2
10-pin serial port 2 - internal	CN3
10-pin serial port 1 - internal, 9-pin serial port 1 external	CN4
16-pin game port	CN5
25-pin parallel port - external	CN6
4-pin connector - drive active LED	JP9

Continued on next page. . .

ATRONICS INTERNATIONAL, INC.

IDE-2015PL

...continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Factory configured - do not alter	JP1	open
í Factory configured - do not alter	JP2	open
í Factory configured - do not alter	JP3	open
í Factory configured - do not alter	JP4	open
í Factory configured - do not alter	JP5	N/A
í Factory configured - do not alter	JP6	N/A
í Factory configured - do not alter	JP7	N/A
í Factory configured - do not alter	JP8/pins 1 & 2	closed
í Floppy drive interface enabled	JP10/pins 1 & 2	closed
í Floppy drive interface disabled	JP10/pins 2 & 3	closed
í Serial port 1 enabled	JP11/pins 1 & 2	closed
í Serial port 1 disabled	JP11/pins 2 & 3	closed
í Parallel port is LPT1	JP12/pins 1 & 2	closed
í Parallel port is LPT2	JP12/pins 2 & 3	closed
í Game port enabled	JP13/pins 1 & 2	closed
í Game port disabled	JP13/pins 2 & 3	closed
í Serial port 1 is COM1	JP14/pins 1 & 2	closed
í Serial port 1 is COM3	JP14/pins 2 & 3	closed
í Parallel port enabled	JP16/pins 1 & 2	closed
í Parallel port disabled	JP16/pins 2 & 3	closed
í Serial port 2 enabled	JP17/pins 1 & 2	closed
í Serial port 2 disabled	JP17/pins 2 & 3	closed
í Serial port 2 is COM2	JP18/pins 1 & 2	closed
í Serial port 2 is COM4	JP18/pins 2 & 3	closed
í Factory configured - do not alter	JP19/pins 2 & 3	closed
í Factory configured - do not alter	JP20/pins 2 & 3	closed
í Factory configured - do not alter	JP21	open
í IDE interface enabled	JP22/pins 1 & 2	closed
í IDE interface disabled	JP22/pins 2 & 3	closed