


HYUNDAI ELECTRONICS, INC.

SUPER 286N

Processor	80286
Processor Speed	12MHz
Chip Set	C & T
Max. Onboard DRAM	4MB (on CPU/NPU card)
Cache	None
BIOS	Award
Dimensions	350mm x 304mm
I/O Options	Floppy drive interface, parallel port, proprietary CPU/NPU card serial port
NPU Options	80287 (on CPU/NPU card)

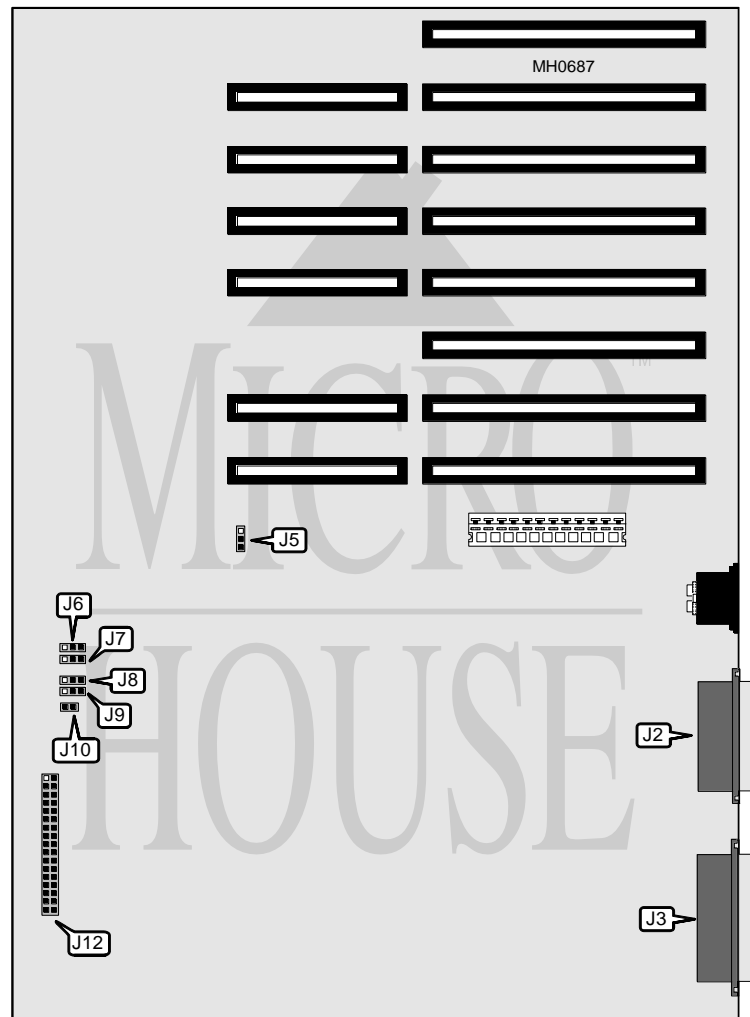

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port	J2	Keyboard & power good signal	J5
Parallel port	J3	Floppy drive interface	J12
Note: Jumper J5 connects to jumper J5 on the CPU card.			


Continued on next page . . .

HYUNDAI ELECTRONICS, INC.

SUPER 286N

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
Serial port select COM1	J6 & J7	pins 1 & 2 closed
Serial port select COM2	J6 & J7	pins 2 & 3 closed
Serial port disabled	J6 & J7	Open
Parallel port select LPT1	J8 & J9	pins 1 & 2 closed
Parallel port select LPT2	J8 & J9	pins 2 & 3 closed
Parallel port disabled	J8 & J9	Open
Floppy drive interface enabled	J10	Closed
Floppy drive interface enabled	J10	Open

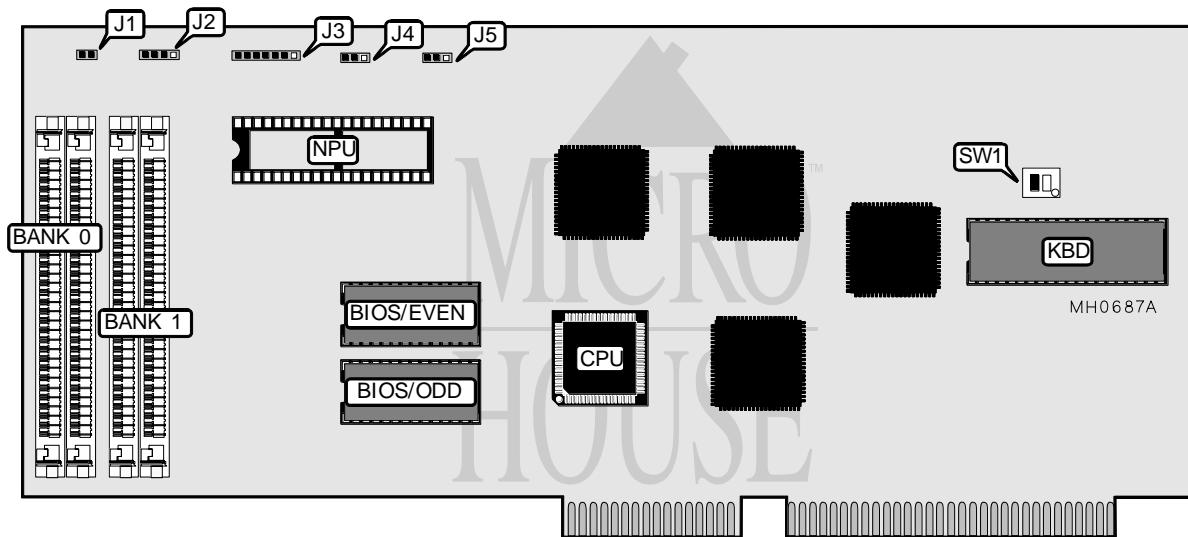

CONNECTIONS (CPU CARD)			
Purpose	Location	Purpose	Location
Speaker	J1	Keylock	J3 pins 4 & 5
External battery	J2	Reset switch	J3 pins 6 & 7
Turbo LED	J3 pins 1 - 3	Keyboard & power good signal	J5

USER CONFIGURABLE SETTINGS (CPU CARD)		
Function	Jumper	Position
Monitor type select color	J4	pins 2 & 3 closed
Monitor type select monochrome	J4	pins 1 & 2 closed

DRAM CONFIGURATION (CPU CARD)		
Size	Bank 0	Bank 1
640KB	(2) 256K x 9	(2) 64K x 9
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9

Continued on next page ...

HYUNDAI ELECTRONICS, INC.
SUPER 286N*... continued from previous page*

DRAM SWITCH CONFIGURATION (CPU CARD)		
Size	SW1/1	SW1/2
640KB	Off	On
1MB	Off	Off
2MB	On	On
4MB	On	On