


# J-BOND COMPUTER SYSTEMS CORPORATION

## A 340C - G 01

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33/40MHz
<b>Chip Set</b>	ETEQ
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	64/256KB
<b>Dimensions</b>	330mm x 218mm
<b>BIOS</b>	AMI
<b>I/O Options</b>	None
<b>NPU Options</b>	80387/3167

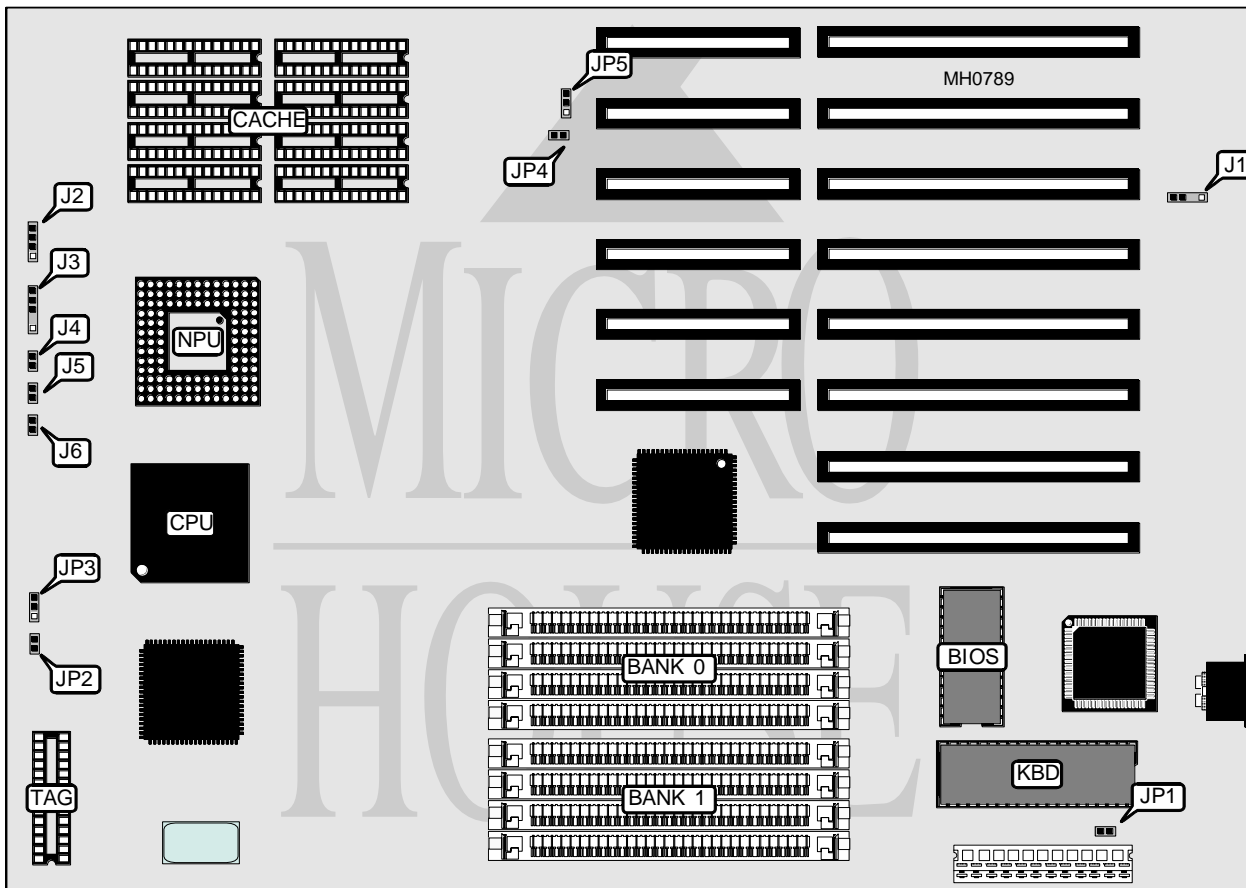

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Turbo switch	J4
Speaker	J2	Turbo LED	J5
Power LED & keylock	J3	Reset switch	J6

Continued on next page . . .

# J-BOND COMPUTER SYSTEMS CORPORATION

## A 3 4 0 C - G 0 1

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CPU speed switchable from turbo switch	JP1	Open
í CPU speed switchable from turbo switch or keyboard	JP1	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION		
Size	Bank 0	TAG
64KB	(8) 8K x 8	(1) 8K x 8
256KB	(8) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	JP2	JP3	JP4	JP5
64KB	Open	pins 1 & 2 closed	Open	pins 1 & 2 closed
256KB	Closed	pins 2 & 3 closed	Closed	pins 1 & 2 closed