


COMPAQ COMPUTER CORPORATION

PROLINEA 3/25ZS

PROLINEA 3/25S

Processor	80386SX
Processor Speed	25MHz
Chip Set	Compaq
Max. Onboard DRAM	16MB
Cache	None
BIOS	Compaq
Dimensions	330mm x 218mm
I/O Options	VGA port, parallel port, bus mouse, serial ports (2), IDE interface, floppy drive interface
NPU Options	80387SX

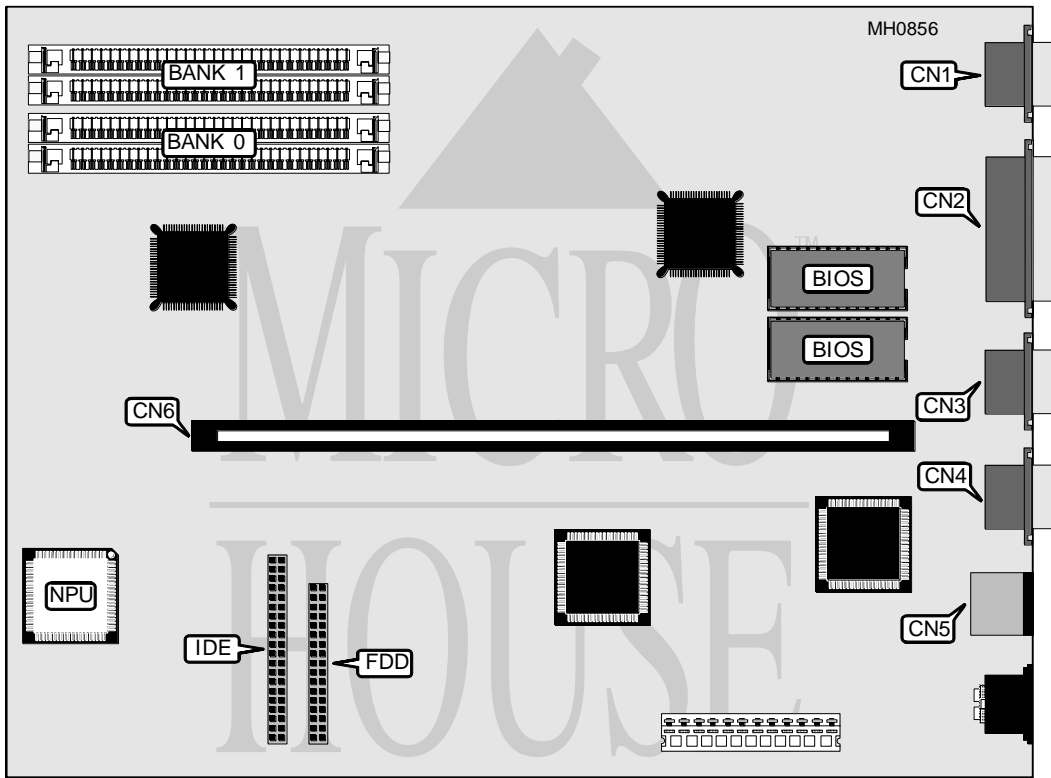

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Serial port 2	CN4
Parallel port	CN2	PS/2 bus mouse	CN5
Serial port 1	CN3	Riser card	CN6

Continued on next page . . .

COMPAQ COMPUTER CORPORATION
 PROLINEA 3/25ZS
 PROLINEA 3/25S

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Bus mouse port enabled	P1	Closed
Bus mouse port disabled	P1	Open
í VGA port enabled	P5	pins 1 & 2 closed
VGA port disabled	P5	pins 2 & 3 closed
í Battery type select internal	P9	pins 2 & 3 closed
Battery type select external	P9	pins 1 & 2 closed
í CMOS memory normal operation	P9	pins 1 & 2 or 2 & 3
CMOS memory clear	P9	Open
í Speaker type select internal	P12	pins 1 & 2 closed
Speaker type select external	P12	pins 2 & 3 closed
Note: The location of jumpers on board are unidentified.		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9