


DELL COMPUTER CORPORATION SYSTEM 325D/333D

Processor	80386DX
Processor Speed	25/33MHz
Chip Set	VLSI
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	329mm x 334mm
I/O Options	Bus mouse, floppy interface, IDE interface, parallel port, serial ports (2), VGA port
NPU Options	80387/3167

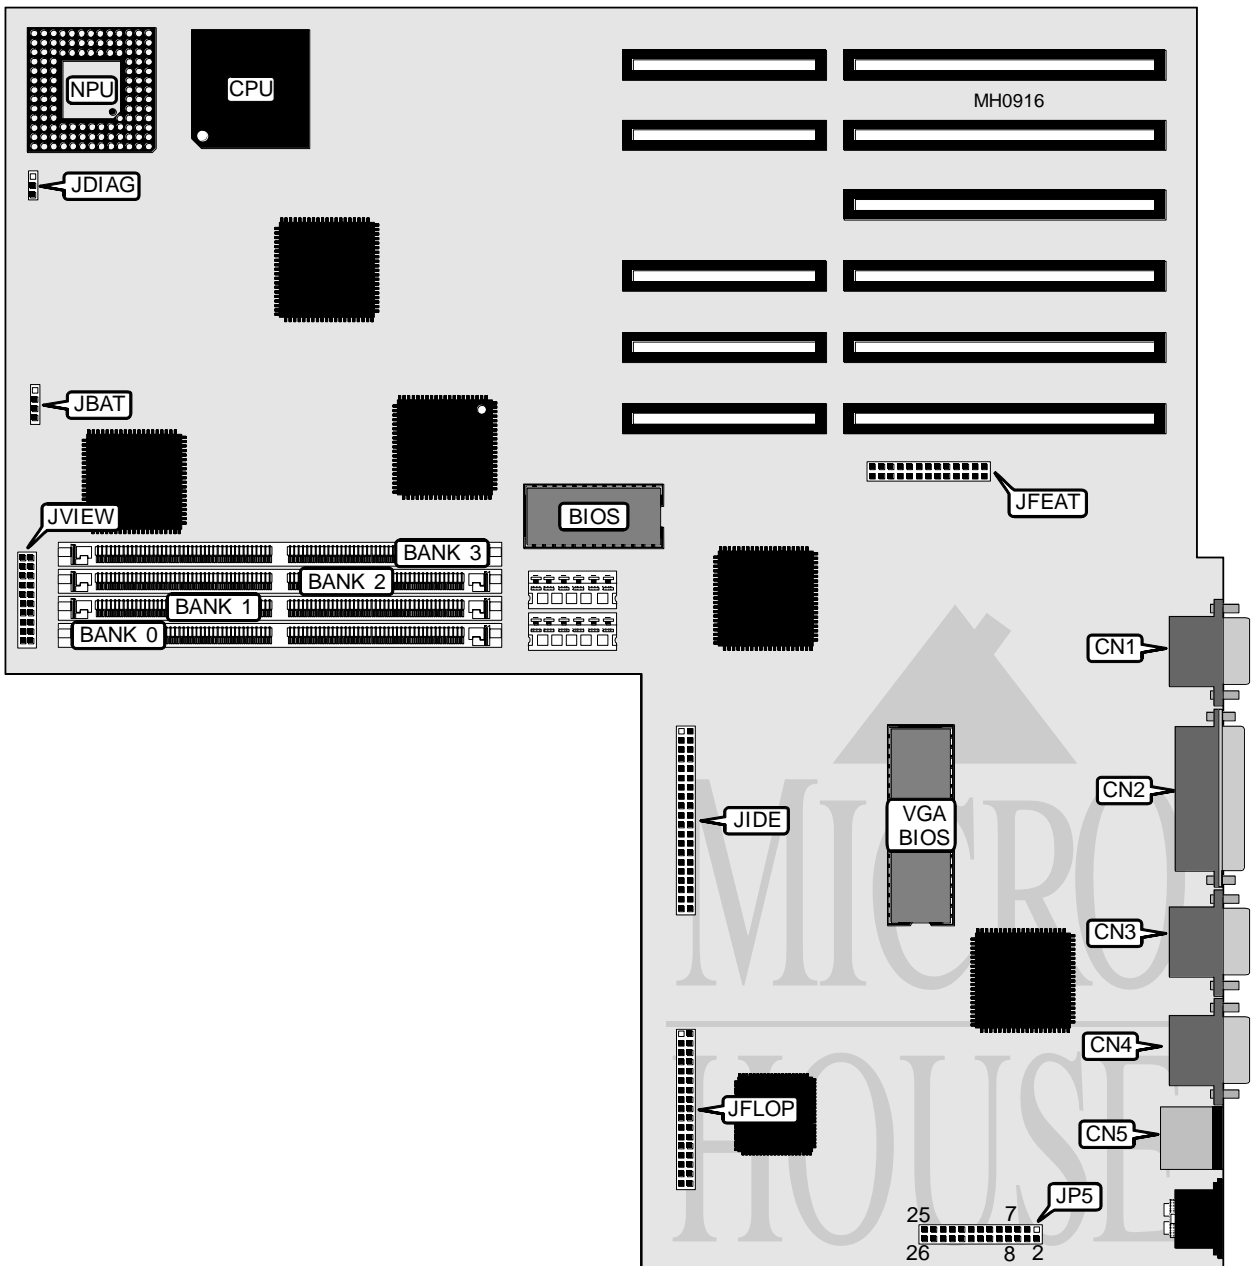

Continued on next page . . .

DELL COMPUTER CORPORATION

SYSTEM 325D/333D

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	VGA pass-through	JFEAT
Parallel port	CN2	Primary floppy drive interface	JFLOP
Serial port 2	CN3	IDE interface	JIDE
Serial port 1	CN4	Reset switch	JP5/pins 1 & 2
Bus mouse port	CN5	Front panel status LCD	JVIEW
External battery	JBAT		

USER CONFIGURABLE SETTINGS		
Function	JP5	Position
í Monitor type select color	pins 3 & 4	Closed
Monitor type select monochrome	pins 3 & 4	Open
í Factory test disabled	pins 5 & 6	Open
Factory test enabled	pins 5 & 6	Closed
í Password check enabled	pins 7 & 8	Closed
Password check disabled	pins 7 & 8	Open
í IDE drives installed select one (on-board IDE port only)	pins 9 & 10	Closed
IDE drives installed select two (on-board IDE port only)	pins 9 & 10	Open
í IDE port enabled	pins 11 & 12	Open
IDE port disabled	pins 11 & 12	Closed
í Monitor type select standard VGA	pins 13 & 14	Open
Monitor type select multifrequency (MultiSync) VGA	pins 13 & 14	Closed
í VGA interrupt request select none	pins 15 & 16	Open
VGA interrupt request select IRQ9	pins 15 & 16	Closed
í IOCHRDY signal disabled to IDE drive(s)	pins 17 & 18	Closed
	pins 19 & 20	Open
IOCHRDY signal enabled to IDE drive(s)	pins 17 & 18	Open
	pins 19 & 20	Closed
í VGA interface enabled	pins 21 & 22	Closed
VGA interface disabled	pins 21 & 22	Open
í Factory configured - do not alter	pins 23 & 24	Open
í Factory configured - do not alter	pins 25 & 26	Open

Continued on next page ...

DELL COMPUTER CORPORATION

SYSTEM 325D/333D

... continued from previous page

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(1) 256K x 36	NONE	NONE	NONE
2MB	(1) 256K x 36	(1) 256K x 36	NONE	NONE
3MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	NONE
4MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
4MB	(1) 1M x 36	NONE	NONE	NONE
5MB	(1) 1M x 36	(1) 256K x 36	NONE	NONE
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	NONE
7MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
9MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36	NONE
10MB	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
13MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36