


ATI TECHNOLOGIES, INC.
14400 ETC-I/19200 ETC-I

Modem Type	Data (synchronous/asynchronous)
Maximum Data Rate	19.2Kbps
Maximum Fax Rate	19.2Kbps
Data Bus	8-bit ISA
Fax Class	Class 1
Data Modulation Protocol	Bell 103 & 212A
	ITU-T V.21, V.22, V.22bis, V.32, V.32ter
Fax Modulation Protocol	GRP III
Error Correction/Compression	MNP 2 - 5, ITU-T V.42, V.42bis

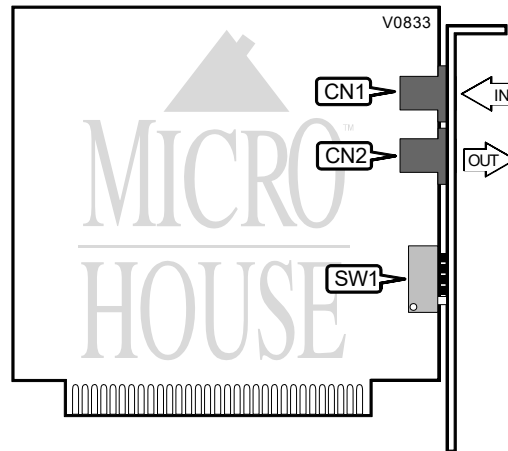

CONNECTIONS			
Purpos	Location	Purpos	Location
Line-out	CN2	Line-out	CN2

MODEM ENABLE/DISABLE	
Setting	SW1/1
Enabled	On
Disabled	Off

ADDRESS SELECT		
COM/Address	SW1/2	SW1/3
COM1/3F8h	Off	Off
COM2/2F8h	Off	On
COM3/3E8h	On	Off
COM4/2E8h	On	On

Continued on next page...

ATI TECHNOLOGIES, INC.
14400 ETC-I/19200 ETC-I

...continued from previous page

INTERRUPT SELECT		
IRG	SW1/2	SW1/!
IRQ2	Off	Off
IRQ3	Off	On
IRQ4	On	Off
IRQ5	On	On

S89 - PROPRIETARY BIT-MAPPED REGISTER		
Value Range:	Bit-mapped	
Default:	254 (19200 ETC-I) 62 (14400 ETC-I)	
Type:	Read/Write	
In Stored Profile?:	Yes	
Description:	Bit-mapped configuration register.	
Bit	Value	Function
0	0	Not used
1	1	4800bps data rate enabled.
	0	4800bps data rate disabled.
2	1	7200bps data rate enabled.
	0	7200bps data rate disabled.
3	1	9600bps data rate enabled.
	0	9600bps data rate disabled.
4	1	12.0Kbps data rate enabled.
	0	12.0Kbps data rate disabled.
5	1	14.4Kbps data rate enabled.
	0	14.4Kbps data rate disabled.
6	1	16.8Kbps data rate enabled.
	0	16.8Kbps data rate disabled.
7	1	19.2Kbps data rate enabled.
	0	19.2Kbps data rate disabled.
Note: Bits 6 & 7 apply to the 19200 ETC-I only.		