


# TOP MICROSYSTEMS, INC.

## JC - 386SX

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20MHz
<b>Chip Set</b>	C & T NEAT
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

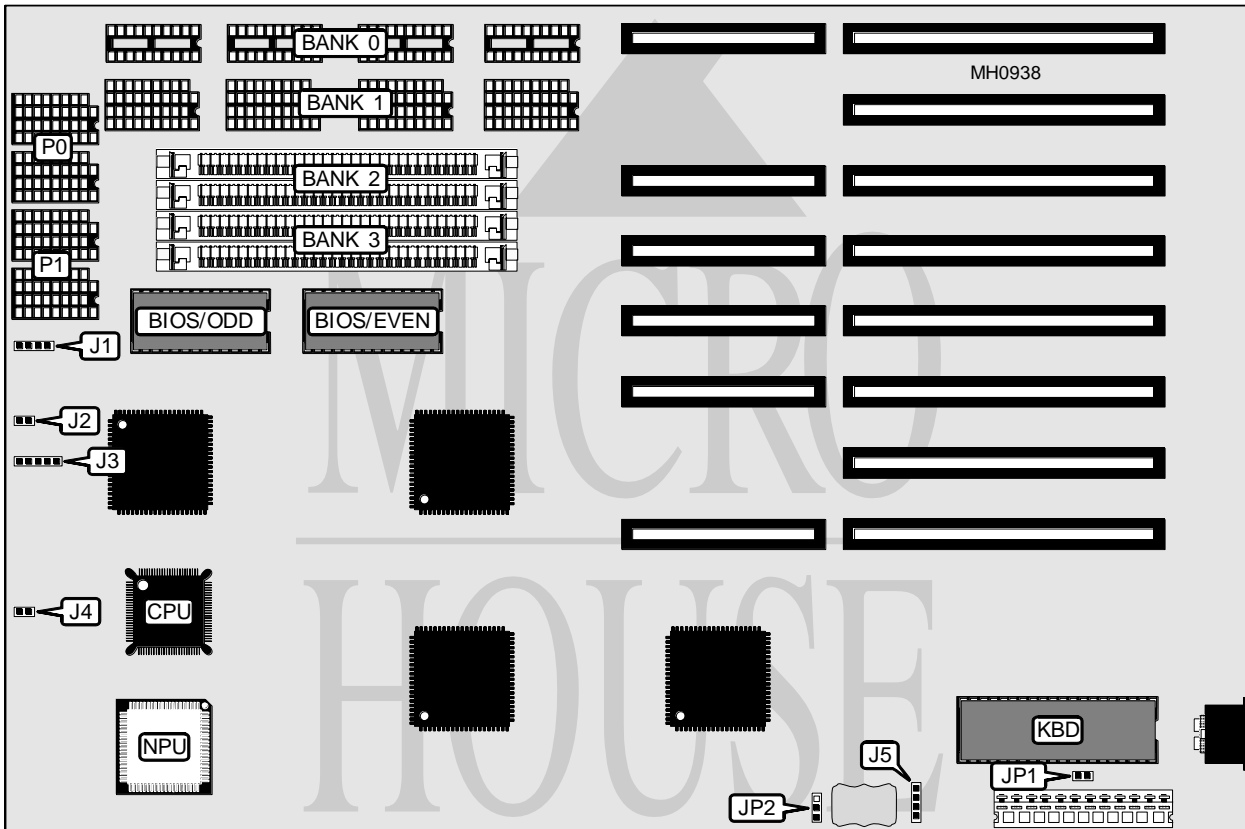

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Reset switch	J4
Turbo LED	J2	External battery	J5
Power LED & keylock	J3		

Continued on next page . . .

# TOP MICROSYSTEMS, INC.

## JC - 386SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color (CGA only)	JP1	Closed
Monitor type select monochrome (any other)	JP1	Open
í CMOS memory normal operation	JP2	pins 2 & 3 closed
CMOS memory clear	JP2	pins 1 & 2 closed

DRAM CONFIGURATION						
Size	Bank 0	P0	Bank 1	P1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1.5MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 256K x 9	NONE
2MB	(4) 441000	(2) 411000	NONE	NONE	NONE	NONE
2MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 256K x 9	(2) 256K x 9
2.5MB	(4) 441000	(2) 411000	(4) 44256	(2) 41256	NONE	NONE
3MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 1M x 9	NONE
3MB	(4) 411000	(2) 411000	(4) 44256	(2) 41256	(2) 256K x 9	NONE
4MB	(4) 441000	(2) 411000	(4) 441000	(2) 411000	NONE	NONE
4.5MB	(4) 441000	(2) 411000	(4) 441000	(2) 411000	(2) 256K x 9	NONE
5MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	(2) 1M x 9	(2) 1M x 9
5MB	(4) 441000	(2) 411000	(4) 441000	(2) 411000	(2) 256K x 9	(2) 256K x 9
6MB	(4) 441000	(2) 411000	(4) 441000	(2) 411000	(2) 1M x 9	NONE
8MB	(4) 441000	(2) 411000	(4) 441000	(2) 411000	(2) 1M x 9	(2) 1M x 9