
## SUNIX CO., LTD. SUN-6303HT (EX-4072)

Card Type Chipset Maximum Onboard Memory I/O Options Data Bus Floppy drives supported Serial/Parallel card AP/16C552B N/A Parallel port, serial ports (2) 16-bit ISA N/A

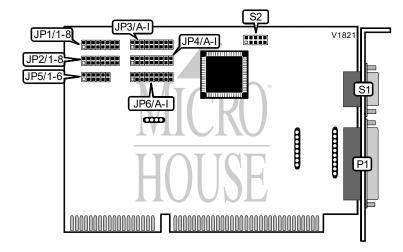

CONNECTIONS							
Function Location Function Location							
25-pin parallel port	P1	10-pin serial port 2	S2				
9-pin serial port 1	S1						

SERIAL PORT 1 ADDRESS SELECTION										
COM	JP1/1	JP1/2	JP1/3	JP1/4	JP1/5	JP1/6	JP1/7	JP1/8		
í COM1(3F8h)	Closed	Open								
COM2(2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open		
COM3(3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open		
COM4(2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open		
COM5(3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open		
COM6(3E0h)	Open	Open	Open	Closed	Open	Closed	Open	Open		
COM7(2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open		
COM8(260h)	Open	Closed								

	SERIAL PORT 2 ADDRESS SELECTION										
COM	JP2/1	JP2/2	JP2/3	JP2/4	JP2/5	JP2/6	JP2/7	JP2/8			
COM1(3F8h)	Closed	Open									
í COM2(2F8h)	Open	Closed	Open	Open	Open	Open	Open	Open			
COM3(3E8h)	Open	Open	Closed	Open	Open	Open	Open	Open			
COM4(2E8h)	Open	Open	Open	Closed	Open	Open	Open	Open			
COM5(3F0h)	Open	Open	Open	Open	Closed	Open	Open	Open			
COM6(3E0h)	Open	Open	Open	Closed	Open	Closed	Open	Open			
COM7(2E0h)	Open	Open	Open	Open	Open	Open	Closed	Open			
COM8(260h)	Open	Open	Open	Open	Open	Open	Open	Closed			

Continued on next page. . .

## SUNIX CO., LTD. SUN-6303HT (EX-4072)

... continued from previous page

PARALLEL PORT 1 ADDRESS SELECTION										
LPT	JP5/1	JP5/2	JP5/3	JP5/4	JP5/5	JP5/6				
í LPT1(3Bch)	Closed	Open	Open	Open	Open	Open				
LPT2(378h)	Open	Closed	Open	Open	Open	Open				
LPT3(278h)	Open	Open	Closed	Open	Open	Open				
LPT4(268h)	Open	Open	Open	Closed	Open	Open				
LPT5(27Ch)	Open	Open	Open	Open	Closed	Open				
LPT6(26Ch)	Open	Open	Open	Open	Open	Closed				

	SERIAL PORT 1 INTERRUPT SELECTION										
IRQ	JP3/A	JP3/B	JP3/C	JP3/D	JP3/E	JP3/F	JP3/G	JP3/H	JP3/I		
IRQ3	Closed	Open									
í IRQ4	Open	Closed	Open								
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open		
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open		
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open		
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open		
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open		
IRQ12	Open	Open	Open	Open	Open	Open	Open	Closed	Open		
IRQ15	Open	Open	Open	Open	Open	Open	Open	Open	Closed		

	SERIAL PORT 2 INTERRUPT SELECTION										
IRQ	JP4/A	JP4/B	JP4/C	JP4/D	JP4/E	JP4/F	JP4/G	JP4/H	JP4/I		
í IRQ3	Closed	Open									
IRQ4	Open	Closed	Open								
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open		
IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open		
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open		
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open		
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open		
IRQ12	Open	Open	Open	Open	Open	Open	Open	Closed	Open		
IRQ15	Open	Open	Open	Open	Open	Open	Open	Open	Closed		

	PARALLEL PORT INTERRUPT SELECTION										
IRQ	JP6/A	JP6/B	JP6/C	JP6/D	JP6/E	JP6/F	JP6/G	JP6/H	JP6/I		
IRQ3	Closed	Open									
IRQ4	Open	Closed	Open								
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open		
í IRQ7	Open	Open	Open	Closed	Open	Open	Open	Open	Open		
IRQ9	Open	Open	Open	Open	Closed	Open	Open	Open	Open		
IRQ10	Open	Open	Open	Open	Open	Closed	Open	Open	Open		
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open		
IRQ12	Open	Open	Open	Open	Open	Open	Open	Closed	Open		
IRQ15	Open	Open	Open	Open	Open	Open	Open	Open	Closed		