


UNIDENTIFIED CT-6260H

Card Type	Multi-I/O
Chipset	Unidentified
I/O Options	Floppy drive interface, parallel port, serial ports (2), clock/calendar
Data Bus	8-bit ISA
Floppy Drives Supported	Two 360KB, 720KB, 1.2MB, or 1.44MB drives

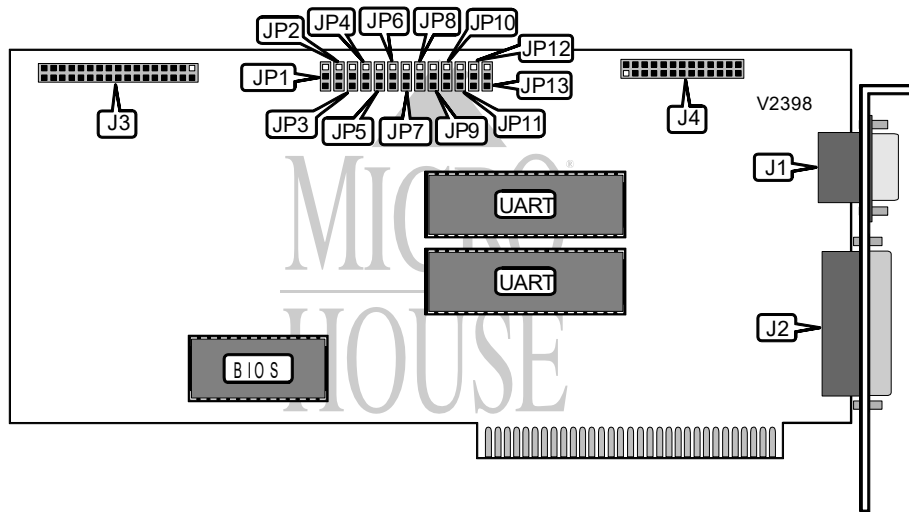

CONNECTIONS			
Function	Label	Function	Label
Serial port 2	J1	Floppy interface	J3
Serial port 1	J2	Parallel port	J4

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
í Factory configured - do not alter	JP7	Unidentified	
í Factory configured - do not alter	JP8	Unidentified	
í Floppy BIOS enabled	JP9	Pins 1 & 2 closed	
Floppy BIOS disabled	JP9	Pins 2 & 3 closed	
í Factory configured - do not alter	JP10	Unidentified	
Drive A: is 3.5"	JP11	Pins 1 & 2 closed	
Drive A: is 5.25"	JP11	Pins 2 & 3 closed	
Drive B: is 3.5"	JP12	Pins 1 & 2 closed	
Drive B: is 5.25"	JP12	Pins 2 & 3 closed	
í Factory configured - do not alter	JP13	Unidentified	

PARALLEL PORT ADDRESS SELECTION	
Setting	JP1
378h	Pins 2 & 3 closed
278h	Pins 1 & 2 closed
Disabled	Open

Continued on next page. . .

UNIDENTIFIED
CT-6260H

... continued from previous page

CLOCK ADDRESS SELECTION	
Setting	JP2
377h	Pins 2 & 3 closed
277h	Pins 1 & 2 closed
Disabled	Open

SERIAL PORT 1 ADDRESS SELECTION	
Setting	JP3
3F8h (COM1:)	Pins 2 & 3 closed
2F8h (COM2:)	Pins 1 & 2 closed
Disabled	Open

SERIAL PORT INTERRUPT SELECTION			
Port 1	Port 2	JP4	JP6
IRQ4	IRQ3	Pins 2 & 3 closed	Pins 1 & 2 closed
IRQ4	None	Pins 2 & 3 closed	Open
IRQ3	IRQ4	Pins 1 & 2 closed	Pins 2 & 3 closed
IRQ3	None	Open	Pins 2 & 3 closed
None	IRQ4	Pins 1 & 2 closed	Open
None	IRQ3	Open	Pins 1 & 2 closed

SERIAL PORT 2 ADDRESS SELECTION	
Setting	JP5
3F8h (COM1:)	Pins 1 & 2 closed
2F8h (COM2:)	Pins 2 & 3 closed
Disabled	Open